

4184 E. Conant St. Long Beach, CA 90808 Tel. 888-900-1002 Fax. 310-900-1088 www.turboairinc.net

Project :	
Model # :	
Item # :	Qty :

Approval :

Unit Cooler

Model : ADR171AE



🔙 FEATURES / BENEFITS 📃

- Blue anti-corrosion-fin increases the life span of the coil.
- Air-pass guard is located at the bottom of the coil to improve heat exchange rate.
- Easy to replace defrost heater (LED model).
- Corrugated fin is used to increase heat exchanges rate by expanding the surface area.
- Even in confined space, all parts can be reached easily by opening the front cover.
- Location of power connector makes replacement of motor convenient.
- Seamless inner groove copper tube increases the heat exchange rate by reducing the space between the fin and copper tube.
- Venturi type distributor and precise orifice hole are used to minimize the pressure drop and maximize the freezing capacity respectively.

- Even in confined space, all parts can be reached easily by opening the front cover.
- Thermostat is installed to prevent over temperature on heater.
- Circuit opens automatically over 70°F.
- Parts available: Expansion Valve (Sporlan) (Factory Pre-mounted) Solenoid Valve (Sporlan) (Factory Pre-mounted) Thermostat (Johnson Control) (Shipped Loose)
- The spiral fan guard enables cold air to be delivered efficiently and thoroughly.
- The protruding fan and motor placement substantially reduce vibration and noise.
- EC Motor (Dual Speed) for high energy efficiency.
- Anti-oxidizing stainless steel mounting and bolts.



Model : ADR171AE

ADR AIR DEFROST MODEL 60HZ WITH EC MOTOR (DUAL SPEED)

Capacity (R-404A)				Capacity (R-448A / R-449A)					Fan Data		
	0°F / 6°C TD 14°F / 8°C TD °F / -4°C SST 21°F / -6°C SST		10°F / 6°C TD		14°F / 8°C TD		Fall Data				
25°F/-4	4-0 551	21°F/-0	5°C SST	25°F / -4	4°C SS I	21°F / -6°C SST		051	/ 21.1		
BTUH	Watts	BTUH	Watts	BTUH	Watts	BTUH	Watts	CFM/m ³ H		No.	
17213	5041	22565	6609	17159	5025	22484	6585	2316	3935	3	


EC Motor Data			Connections (Inches)				Approx.	AWEF Value		
	115V 1Ph 60Hz		Connections (menes)				Net Weight	AWEF Value		
HP	Total Amps	Watts	COIL INLET	SUCTION	EQUALIZER	DRAIN	(Lbs. / Kg)	R-404A	R-448A / R-449A	
1/25	2.25	75	1/2 OD	7/8 ID	1/4 OD	3/4 MPT	67 / 30	9	9	

Design and specifications subject to change without notice

WARRANTY : 1 Year Fan Motor and Parts Warranty

PLAN VIEW

(unit : inch)

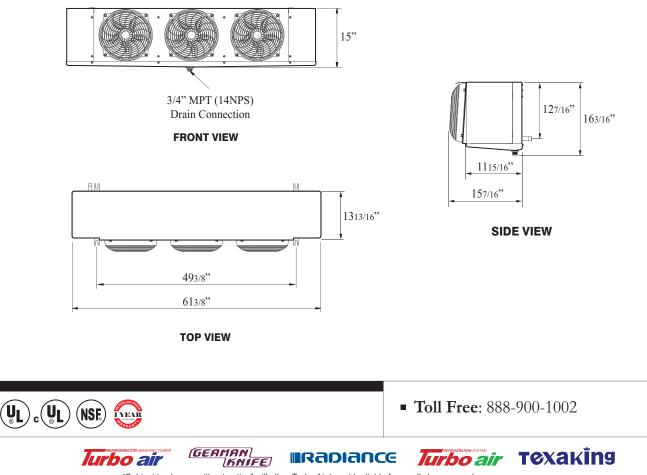

"Subject to change without notice" will allow Turbo Air to not be liable for small changes such as amperage, size or any other issue that someone would blame on us.