


# RIM **MAXIMUM** PRESSURE RATING CHART

Tire Width (A)		Clincher rim internal width (B)			Rim maximum pressure rating (C)	
(mm)	(inch)	15 - 18mm	19 - 22mm	23 - 26mm	(bar)	(psi)
20	0.79	●			8.6	125
23	0.91	●	●		7.9	115
25	0.98	●	●		7.2	105
28	1.10	●	●		6.3	92
30	1.18	●	●		5.8	84
32	1.26		●		5.4	78
35	1.38		●	●	4.9	71
37	1.46		●	●	4.7	67
40	1.57		●	●	4.3	62
42	1.65		●	●	4.1	59
45	1.77			●	3.8	55
48	1.89			●	3.6	52
50	1.97			●	3.4	50
53	2.09			●	3.2	47

● - Permitted Combination (also check with tire manufacturer for permitted rim width and type)

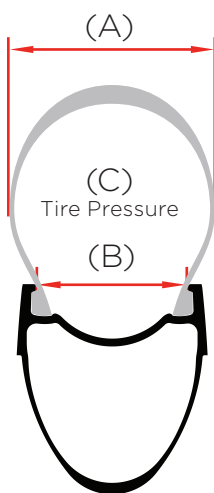

A. Refer to technical information on tires.

**EXAMPLE:** Road: 622 x 25

B. Refer to technical information Easton rims.

**EXAMPLE:** 622 x 19.5

B. For conventional tire systems

(tubetype, tubeless ready, Road Tubeless).

The tire pressure must stay within the tire manufacturer's specified pressure, but never exceed the rim maximum pressure rating specified by Easton Cycling.