

wildcatgear.co.uk

- Lioness is recommended only for use in conjunction with Mountain Lion. We do not recommend you attempt to secure a dry bag to your handlebars using only Lioness.
- We recommend protecting your bars and forks with durable/protective tape prior to fitting e.g. copter tape, several layers of insulation or self-amalgamating tape, or an old piece of inner tube. Occasionally, lengthening the gear outer / brake hose will provide a cleaner path, less interference and a more secure fitting of Lioness and Mountain Lion.
- When positioned correctly, the Lioness compartment should be accessible when standing over the bike.
- Check strap tension periodically to take up any stretch that may occur or resetting of the dry bag contents.


HINTS & TIPS

WARRANTY

- Wildcat Gear warrants its products for material defects and workmanship for a period of 12 months from the date of purchase for the original owner.
- This warranty is valid only for goods used for their intended purpose and does not cover wear and tear sustained through normal use, nor damage incurred as a result of incorrect fitting or adjustment.
- Visit website for full details.

wildcatgear.co.uk

WILDCAT GEAR, WILDCAT and the WILDCAT logo are trademarks of Wildcat Gear.
Wildcat Gear, 10 Priory Hill, Brecon, LD3 9DH

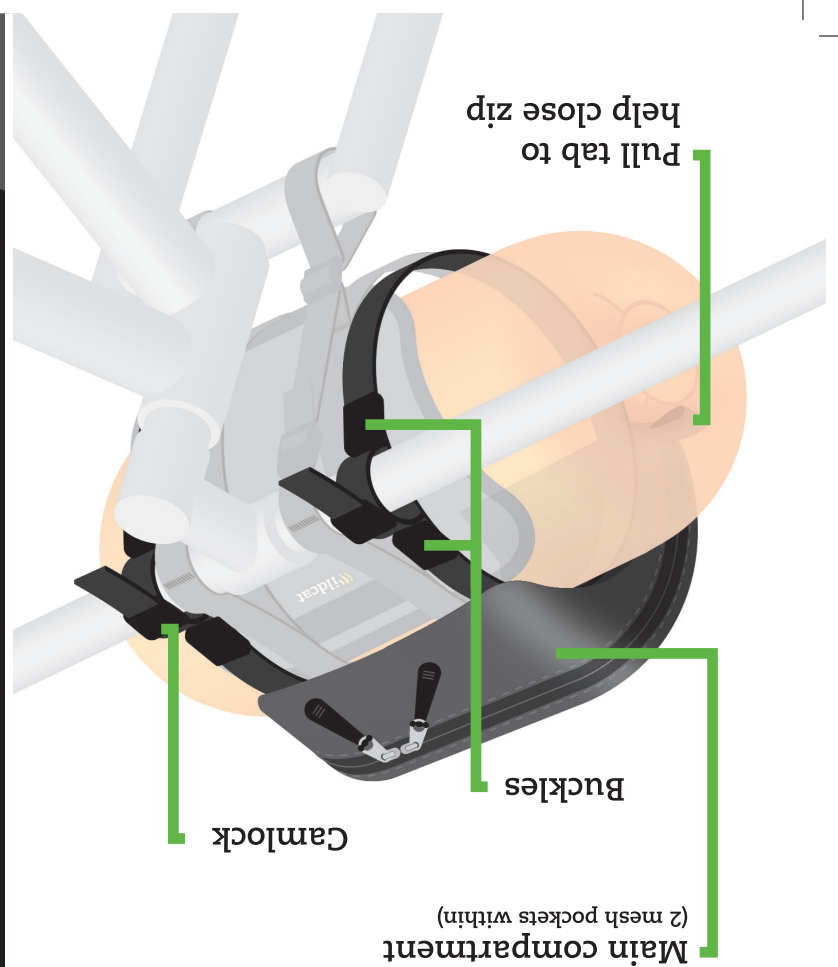

OVERVIEW

 wildcat

LIONESS

HANDLEBAR PACK


- Convenient **extra-capacity storage** to partner Wildcat Mountain Lion.
- Padded VX21 and ballistic nylon fabric construction **protects the front of your dry bag.**
- Easy access with **wide double-zipped opening.**
- **Curved profile** is optimised for 8- to 13-litre dry bags.

wildcatgear.co.uk

CUSTOM
BIKEPACKING
EQUIPMENT

 MADE IN
BRITAIN


STEP 1

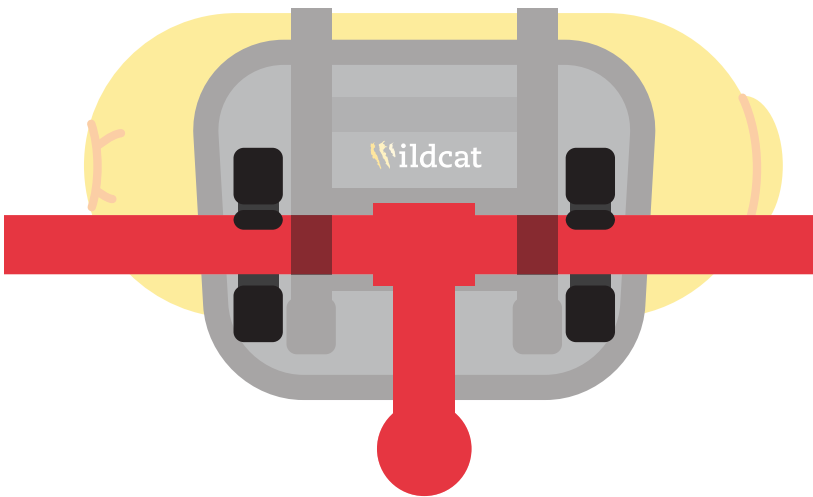

Place the Lioness retaining straps underneath the handlebar, just outboard of the Mountain Lion straps.

The camlock should be towards the front of the bike.


STEP 2

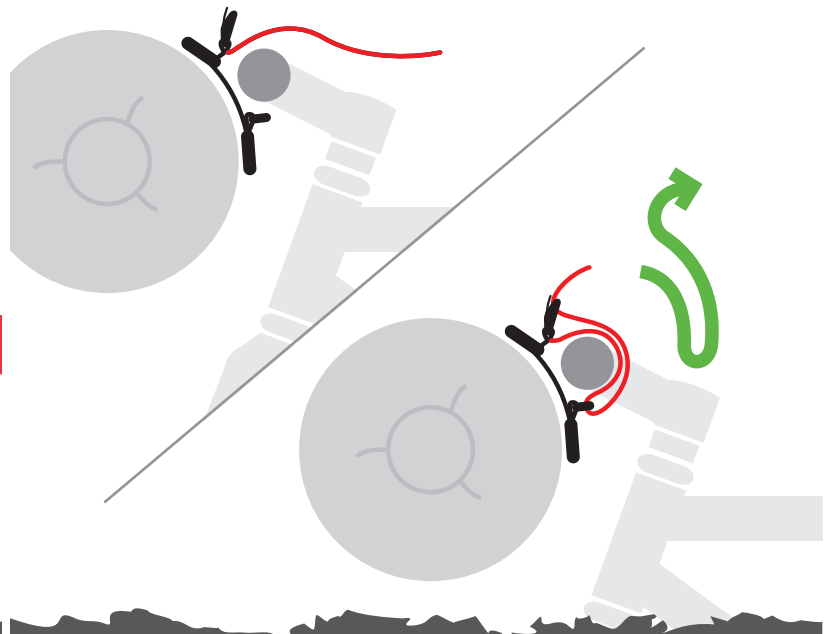

Take the free end of the strap and loop it over the top of the bar towards the rear. Thread it through the square loop and back over the top of the bar and through the camlock.

Pull tight and close the camlock.

STEP 3

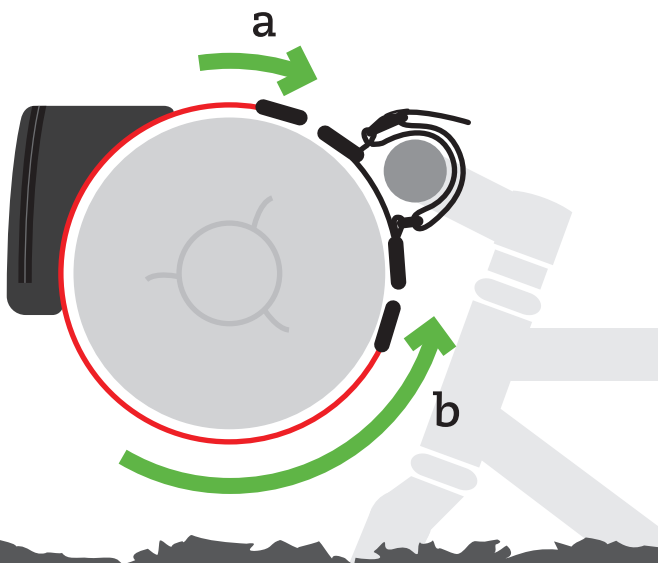


Place Lioness in position on the front of the dry bag and clip the top buckles of the Lioness into the retaining straps.

Adjust the top straps to vertically position Lioness.

Clip the bottom strap buckles into the retaining straps.

STEP 4

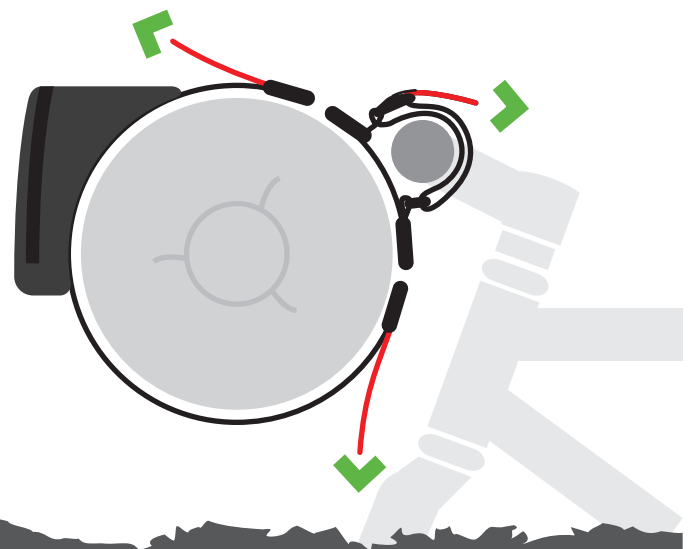

Make a final check on position and strap tension, ensuring that Lioness sits squarely on the bike.

Note: When removing Lioness, unclip the bottom buckles first to prevent the bag from falling on to the front wheel.