


# Compare our portable power packs

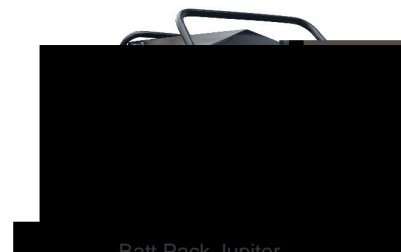

	Batt Pack Energy	Batt Pack Pro	Batt Pack Jupiter
AC Inverter	3,000W	5,000W	7,000W
Surge Power	4,500W (500ms) 6,000W (10ms)	7,000W (500ms) 10,000W (10ms)	12,000W (1sec)
Loaded Motor Capacity	+2HP	+3HP	+5HP
Energy	2.5kWh	5.1kWh	7.2kWh
Chemistry	LiFePO4		
Cycles	+3,500 Cycles		+3,000 Cycles
Voltage	120V AC*		120V AC and 240V AC
Frequency	60 Hz		50 Hz / 60 Hz
Solar Input Power	1,600W	5,500W	800W
Solar Input Voltage	30-80V DC	125-450V DC	29-75V DC
Max Solar Amperage	40A		30A
Grid Charging Power	1,200W		1,110W
Bypass Power	1,200W		N/A
Sine Wave	Pure Sine Wave		
Output Voltage Threshold	5%		
Dimensions	50.2cm x 40.8cm x 25.6cm [19.8in x 16.1in x 10.1in]	64.7cm x 50.8cm x 30cm [25.5in x 20in x 11.8in]	91.4cm x 68.5cm x 58.4cm [36in x 27in x 23in]
Weight	38 kg [83.7 lbs]	63.5 kg [140 lbs]	127 kg [280 lbs]
Storage Temperature	-30°C to 50°C [-22°F to 122°F]		-20°C to 45°C [-4°F to 113°F]
Operating Temperature	-30°C to 50°C [-22°F to 122°F]		-20°C to 45°C [-4°F to 113°F]
Certification	UL9540A, UL1642, CSA SP-1000, UL1741		CSA SP-1000, UL-458
Safety Features	<ul style="list-style-type: none"> <li>Solar reverse polarity protection</li> </ul>	<ul style="list-style-type: none"> <li>Short circuit protection</li> <li>Over temperature shut off</li> </ul>	<ul style="list-style-type: none"> <li>Overload protection</li> </ul>

\* 240V AC 50 Hz model available upon request, subject to MOQs

\*\*Custom colours available, subject to MOQs.



ATTENTION: Please note it is the customer's obligation to check local electrical requirements and certification requirements of all HPS purchased equipment to ensure they meet the local electrical code. Additional components such as AFCI protection, Conduit Caps, and fusing/breakers may be required.