



# INSTRUCTIONS

## 3mm Thick Flat Packed Fire Pit, 400/600mm Long

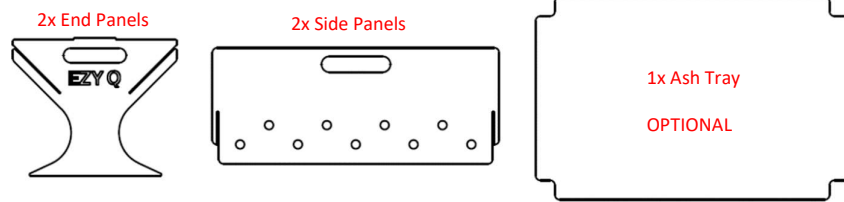

1. Hold the 2 end panels about 40 or 60 cm apart, depending which size you purchased. It may be easier to have someone to help you with this.
2. Slide one of the side panels, into the slots on the right-hand side of the end panels, see diagram below.
3. Repeat this step on the other side of the fire pit.
- 4.
5. If you have the EZY Q grill plate, lock this onto the fire pit by placing the notches in the grill over the raised edges on the end panels.
6. Place the assembled fire pit over the ash tray and light your fire. Enjoy!

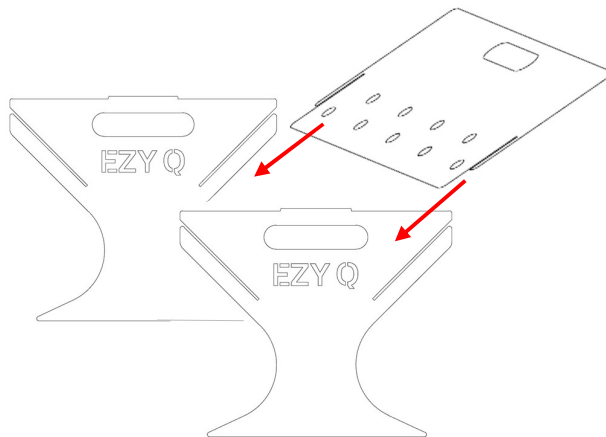

### TOP TIP:

If you start to see a bow/warp in the sides of your fire pit after a few uses, we recommend that you flip the sides over and burn on the opposite side, so it bows back out the other way, making it straight again.

By oiling the entire fire pit and storing it completely dry after each use, it will help prevent the mild steel from rusting.

If you have a mild steel grill plate, for the first use, we recommend that you place the grill over high heat, pour a generous amount of cooking oil on it, and buff the surface. This will remove any impurities, and when the oil soaks into the steel, it helps to repel water which causes the mild steel surface to rust. Stainless steel just needs to be cleaned and you can skip this oil & buff step.

Alternatively, you can coat your fire pit with high temperature paint available online or from your local Bunnings. We recommend **White Knight High Temp Spray Paint - Black**. This is not suited for use on grills or cooking surfaces, so only paint the fire pit parts. See image to the right.

