

# LEDCXTEU All LED Exit & Emergency Combo

Project:	
Type:	
Catalog #:	

## STANDARD



## OPTIONAL

### ILLUMINATION

- **Lasting**, efficient ultra-bright white LED lamp heads.
- **Low watt** (8 LEDs x 0.125 watt) per head
- **High-performance** chrome-plated metalized reflector and plastic lens for optimal light distribution.
- **Adjustable** lamp heads provides optimal center-to-center spacing. Optional high-lumen heads are available for increased center-to-center spacing.
- **Long life**, energy efficient Red or Green LED exit sign illumination.

### ELECTRICAL

- **120V** 1277 voltage.
- **Charge** power "ON" LED indicator light and push to test switch for mandated code compliance testing.
- **Long-life**, maintenance-free, rechargeable NiCd battery.
- **Internal**-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- **Automatic** solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING

- **EZ-snap** mounting canopy included for top or end mount.
- **Universal** K/O pattern on back plate for wall mount.

### HOUSING

- **Injection-molded**, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- **EZ snap-out** Chevron directional indicators.




### OPTIONS

- **HL**: 12-LED heads provide increased center-to-center spacing. (1.5 watt (8 LEDs x 0.125 watt) per head)
- **SDT**: Self-diagnostic test feature performs monthly, biannually, and annually tests to ensure reliable operation and to meet electrical and life safety codes.

### WARRANTY/LISTING

- **Five** year warranty on all electronics and housing. Battery pro-rated for five years.
- **Meets** UL 824, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- **listed** for damp locations. (0°C – 40°C)

### DIMENSIONS

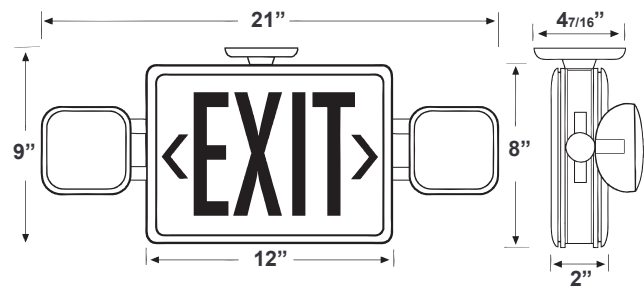

Sample Part Number: **LEDCXTEU-1-R-W**

### ORDERING INFORMATION

Special voltage and SALIDA face plate options available. Check with your Best Lighting Representative.

Model	No. of faces	Letter Color	Housing Color	Options
LEDCXTEU	1 Face	Red	W White	RC Rechargeability
	2 Universal	G Green	B Black	HL Lumen High
	Single/Double Face			SDT Self-diagnostics

# LEDCXTEU All LED Exit & Emergency Combo

<b>Project:</b>	
<b>Type:</b>	
<b>Catalog #:</b>	

## ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
LEDCXTE-RED	3.7	3.8	0.040	0.020
LEDCXTE-GREEN/RC	3.0	3.2	0.030	0.014
LEDCXTE-RED-RC	3.4	3.6	0.033	0.015
LEDCXTE-RED/GREEN-SDT/RC-SDT	5.2	5.7	0.046	0.022

## CENTER-TO-CENTER SPACING GUIDELINES

Consult factory for details.

## REMOTE LAMP COMPATIBILITY

	Maximum Wattage Allowed
LEDCXTEU-RC	3

Remote Head Family	Total Wattage
RHLED1-CLPCXTE	1
RHLED2-CLPCXTE	2
RHLED1-WP-CLPCXTE	1
RHLED2-WP-CLPCXTE	2
RHLED1-CLPCXTE-HL	1.5
RHLED2-CLPCXTE-HL	3
RHLED1-WP-CLPCXTE-HL	1.5
RHLED2-WP-CLPCXTE-HL	3

	Maximum Wattage Allowed
LEDCXTEU-RCSDT	3

Remote Head Family	Total Wattage
RHLED1SDT-CLPCXTE	1
RHLED2SDT-CLPCXTE	2
RHLED1SDT-WP-CLPCXTE	1
RHLED2SDT-WP-CLPCXTE	2
RHLED1SDT-CLPCXTE-HL	1.5
RHLED2SDT-CLPCXTE-HL	3
RHLED1SDT-WP-CLPCXTE-HL	1.5
RHLED2SDT-WP-CLPCXTE-HL	3