

## DS-KH6110-WE1


### Video Intercom Network Indoor Station







- New UI V2.0: User friendly design
- 4.3-inch colorful touch screen with resolution 480 × 272
- Standard PoE power supply without additional power adaptor
- Convenient Hik-Connect APP Mobile Control
- Views live videos of door stations and linked cameras
- Convenient for users to customize functions according to their own usage habits by 4 custom touch button

## ▪ Specification

Model		DS-KH6110-WE1	
System parameters	Operating system	Embedded Linux operation system	
	ROM	16 MB	
	RAM	128 MB	
	CPU	Embedded processor	
Display parameters	Screen size	4.3-inch colorful RGB screen	
	Operation method	Capacitive touch screen with 9 Touch button	
	Type	Colorful RGB screen	
	Resolution	480 × 272	
Video parameters	Lens	/	
	Resolution	/	
	FOV	/	
	WDR	/	
	Video compression standard	/	
	Focal length	/	
Audio parameters	Audio compression standard	G.711 U, G.711 A	
	Audio input	Built-in omnidirectional microphone	
	Audio output	Built-in loudspeaker	
	Audio compression bitrate	64 Kbps	
	Audio quality	Noise suppression and echo cancellation	
	Volume adjustment	Adjustable	
Capacity	Event capacity	200	
	Notice capacity	16	
	Linked indoor extensions capacity	16	
Network parameters	Communication protocol	TCP/IP, SIP, RTSP	
	Wi-Fi standard	Wi-Fi 802.11 b/g/n	
	Bluetooth version	/	
	3G/4G	/	



Product and solution information.

HQ  HikvisionHQ  Hikvision\_Global  Hikvision Corporate Channel  hikvisionhq

	standard	
	Zigbee	/
<b>Device interfaces</b>	Alarm input	/
	Network interface	1 RJ-45 10/100 Mbps self-adaptive
	TAMPER	/
	RS-485	/
	USB	/
	TF card	/
	Alarm output	/
	<b>General</b>	Button
Installation		Wall mounting, table mounting
Indicator		0
Protective level		/
Working temperature		-10 °C to 50 °C (14 °F to 122 °F)
Working humidity		10% to 90%
Dimensions		120 mm × 120 mm × 21 mm (4.7" × 4.7" × 0.83")
Battery		/
Application environment		Indoor
Power consumption		≤ 4 W
Language		English, French, Portuguese, Portuguese (Brazil), Spanish, Russian, German, Italian, Polish, Turkish, Vietnamese, Arabic, Czech, Hungarian, Dutch, Romanian, Bulgarian, Ukrainian, Croatian, Serbian, Greek, Lithuanian, Estonian, Latvian, Norwegian Danish, Slovenian, Slovak, Swedish, Finnish, Traditional Chinese, Mongolian, Hebrew, Kazakh, Uzbek

## ▪ Available Model

DS-KH6110-WE1

## ▪ Dimension

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ




Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq

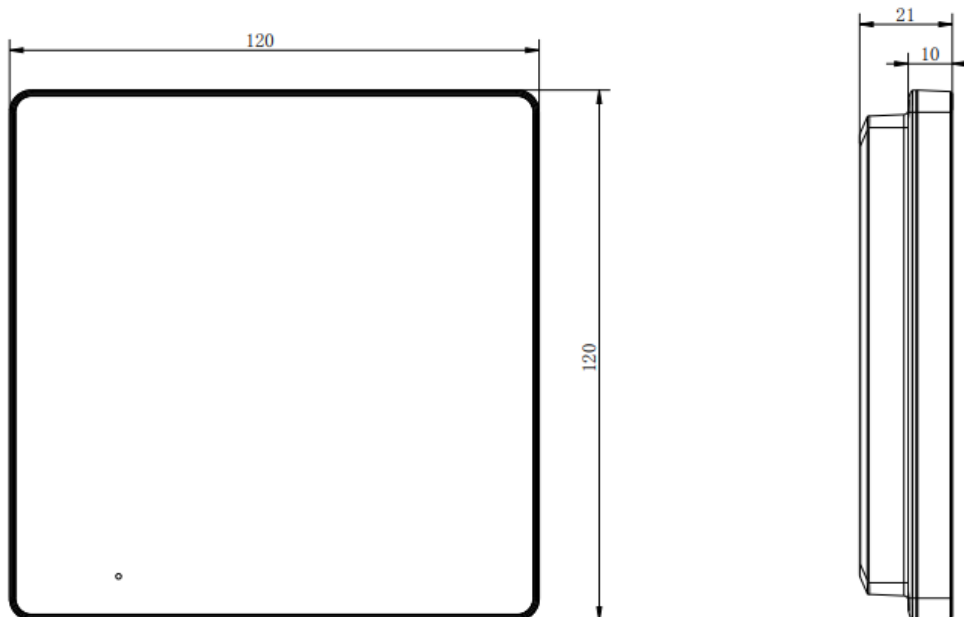

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

