DS-KIS101-P/Surface Video Intercom Two-Wire Analog Bundle







Key Feature

- 2-Wire plug & play, easy, cost-efficient
- Receive video call and unlock via indoor station
- 7-inch TFT screen with 1024*600 resolution
- 2MP HD colorful camera
- View in color, even in darkness
- One-touch calling with nametag
- IP65 water resistant, preventing from water ingress
- IK7 vandal resistant
- 2 lock relays, power supply for one electric lock (Up to 12V 1A)

Specification


Door station			
Supplement light	IR supplement		
Lens	Low Illumination 2 MP HD IR Camera		
FOV	Horizontal: 100°, Vertical: 69°		
WDR	Support		
Resolution	2MP		
Door station			
Audio input	Built-in omnidirectional microphone		
Audio output	Built-in loudspeaker (More than 80 dB within 20 cm)		
Volume adjustment	Adjustable with screwdriver		
Door station			
Alarm input	4		
Two-Wire	1		

TAMPER	1		
Exit button	2		
	2, lock duration can be adjusted via DIP		
Lock control	switch (Max. 7 s)		
Door contact	2		
input	2		
Power supply	1, Max. 12 V 1 A		
for lock	1, (VIGA. 12 V 1 A		
Debugging port	1		
Door station			
Button	1		
Installation	Surface mounting with protective shield		
Protective level	IP65, IK7		
Working	-30 ° C to +60 ° C (-22 ° F to 140 ° F)		
temperature			
Working	10% to 90%		
humidity	10% to 30%		
Dimensions	150 mm $ imes$ 82 mm $ imes$ 23.5 mm (5.91"		
Dimensions	× 3.23" × 0.93")		
Power supply	48 VDC, 0.5 A		
Application	Outdoor		
environment	Cataooi		
Power	≤ 12 W		
consumption	< 12 W		
Door station			
Operation	Embedded analog operation system		
system			
Indoor station			
Size	7-inch TFT non-touch screen		
Operation	6 touch buttons		
method			



Туре	Colorful TFT screen			
Resolution	1024 × 600			
Indoor station				
Audio input	Built-in omnidirectional microphone			
Audio output	Built-in loudspeaker (More than 80 dB within 20 cm)			
Audio quality	/			
Volume	Adjustable via touch-button			
Audio compression Rate	/			

Indoor station				
Two-wire	3			
Indoor station				
Power supply	48 VDC			
Power	≤ 5 W			
consumption				
Working	40 % 61 50 % 6/44 % 51 422 % 5			
temperature	-10 ° C to 50 ° C (14 ° F to 122 ° F)			
Working	100/11 000/			
humidity	10% to 90%			
Dimensions (W	187 mm × 137 mm × 25.4 mm (7.36"			
imes H $ imes$ D)	× 5.39" × 1.00")			
Installation	Surface mounting			
Button	6			
Indoor station				
Operation				
system	Embedded analog operation system			

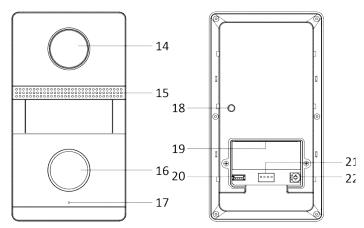



No.	Description	No.	Description
1	Screen	12	DIP Switch
2	Microphone	13	Debugging Port
3	Volume +	14	Camera
4	Volume -	15	Loudspeaker
5	Receive /Decline	16	Call Button
6	Unlock Door 2	17	Microphone
7	Unlock Door 1	18	TAMPER
8	Monitor /Switch	19	Terminals
9	Terminals	20	Debugging Port
10	Loudspeaker	21	DIP Switch
11	Power	22	Volume
	Terminal		Adjust

Available Model


DS-KIS101-P/Surface(海外标配)(样机),


Physical Interface






Dimension











Unit:mm



Distributed by

HIKVISION°

Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T+86-571-8807-5998 overseasbusiness@hikvision.com

Hikvision USA T+1-909-895-0400 sales.usa@hikvision.com

Hikvision Australia

T+61-2-8599-4233 salesau@hikvision.com

Hikvision India

T+91-22-28469900 sales@pramahikvision.com

Hikvision Canada

T+1-866-200-6690 sales.canada@hikvision.com

Hikvision Thailand

T+662-275-9949 sales.thailand@hikvision.com

Hikvision Europe T +31-23-5542770 sales.eu@hikvision.com

Hikvision Italy T +39-0438-6902

info.it@hikvision.com

Hikvision Brazil

T +55 11 3318-0050 Latam.support@hikvision.com

Hikvision Turkey T +90 (216)521 7070- 7074 sales.tr@hikvision.com

Hikvision Malaysia

T+601-7652-2413 sales.my@hikvision.com

Hikvision UK & Ireland T +01628-902140

sales.uk@hikvision.com

Hikvision South Africa

Tel: +27 (10) 0351172 sale.africa@hikvision.com

Hikvision France T +33(0)1-85-330-450

info.fr@hikvision.com

Hikvision Kazakhstan T +7-727-9730667

nikia.panfilov@hikvision.ru

Hikvision Vietnam

T +84-974270888 sales.vt@hikvision.com

Hikvision UAE T +971-4-4432090

salesme@hikvision.com

Hikvision Singapore T +65-6684-4718 sg@hikvision.com

Hikvision Spain T +34-91-737-16-55 info.es@hikvision.com

Hikvision Tashkent T +99-87-1238-9438

Hikvision Hong Kong T +852-2151-1761 info.hk@hikvision.com

uzb@hikvision.ru

Hikvision Russia T +7-495-669-67-99 saleru@hikvision.com

Hikvision Korea T+82-{0}31-731-8817 sales.korea@hikvision.com

Hikvision Poland

T +48-22-460-01-50 info.pl@hikvision.com

Hikvision Indonesia

T+62-21-2933759 Sales.Indonesia@hikvision.com

Hikvision Colombia

sales.colombia@hikvision.com