

DESCRIPTION

The IXGW-LC is a lift control adaptor for the IXG Series IP multi-tenant system. This adaptor allows for integration to the elevator control system allowing the elevator to be called to specific floors based on which tenant opened the door.

The IXGW-LC is equipped with 20 Form C relays and up to 16 adaptors can be included in a building. Each relay can be configured and assigned to a specific entry, tenant station, or app. Individual relay contacts can be activated when a specific tenant activates door release on a specific entry panel allowing the elevator to open and go to a specific floor. Additionally the elevator recall button on the IXG-2C7 can be used to activate a contact to recall the elevator to that specific floor.


FEATURES

- PoE compliant
- 20 Form C relays
- Relay rating (24V AC/DC 500mA)
- Max of 16 adaptors per building

IXGW-LC

Lift Control Adaptor

FEATURE CALL-OUT

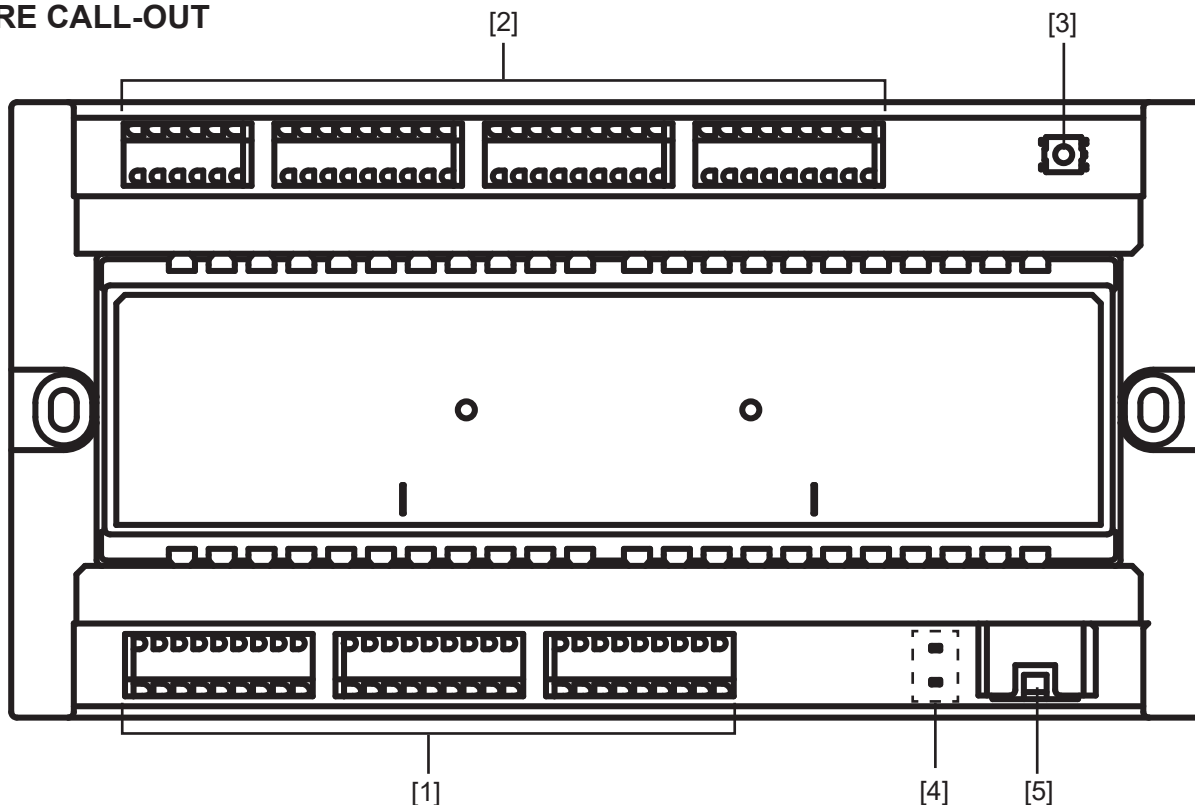

FEATURE CALL-OUT DEFINITIONS

- [1] Relays 1-9
- [2] Relays 10-20
- [3] Reset button
- [4] Status Indicators (orange/green)
- [5] LAN Port (PoE)

SPECIFICATIONS

- | | |
|------------------|---|
| Power Source: | PoE |
| Consumption: | Standby 2.1W, Max 4.4W |
| LAN: | Ethernet
(10BASE-T, 100BASE-TX) |
| Packet delivery: | Unicast, Multicast |
| Protocol: | IPv4/v6, TCP, UDP, HTTP,
HTTPS, IGMP, MLD, FTP,
DHCP, NTP, DNS, TLS |
| Encryption: | TLS 1.0, 1.1, 1.2 |
| Operating Temp: | 14° ~ 122°F (-10° ~ 50°C) |
| Dimensions: | 4-1/4" H x 8-1/4" W x 2-3/8" D |