




Installing a Two Panel Japanese Folding Screen

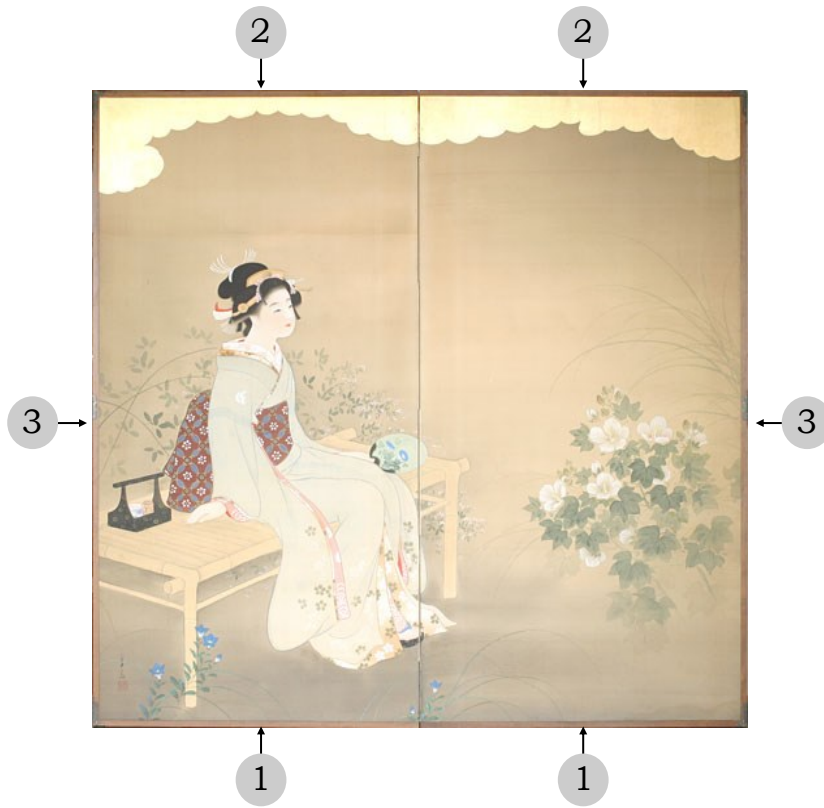

BOTTOM CLIP

Nail directly into wall




Screen fits into channel

1

TOP CLIP

Nail into wall through the 2 holes that are drilled at an angle



2

SIDE CLIP

Same as top clip, turned sideways



3

Step 1

Position your bottom row of screen clips in the center of each panel. Use the double sided positioning tape on the back of the clips. Once they are level and straight, nail them into place. Place the screen in the channel created by the screen clips.

Step 2

Have someone hold the screen in place (place pressure along the folds where there are wooden supports beneath the paper/silk). Use a tissue or soft cloth to protect the surface from oils on your hands. Slide the top clip over the top edge, placed at each fold and nail into place.

Step 3

Position the side clips, one at either end in the center of the screen height and nail it in place.

The installation is complete!