

v5POS



IP54 Whole Unit



Aluminium Die-cast
Sleek Enclosure



Removable SSD*

* C20/X35 only.

SEÑOR

SE NOR v5POS Series Touch POS Terminal


Senor v5POS series feature a brand new concept with an ultra-narrow bezel-less screen and sleek exterior design, with interchangeable frame and casing to match the retailer's style.



v5POS is an energy-efficient solution with low power consumption on a high-performing platform. The CPU consumes less power, generates less heat and helps to keep our environment green.


With its elegant design, v5POS is ideally suited for the retail and hospitality industries' flagship and pop-up stores.

I/O Connector



v5POS J19

2 x Serial | 1 x Cash Drawer | 4 x USB | 1 x VGA



v5POS C20/X35

3 x Serial | 1 x Cash Drawer | 4 x USB | 1 x VGA

Optional Accessories



Built-in Wireless LAN



10" / 15" Customer Display



MSR / Fingerprint / RFID Reader




VFD Customer Display



Coloured Frame*

Features

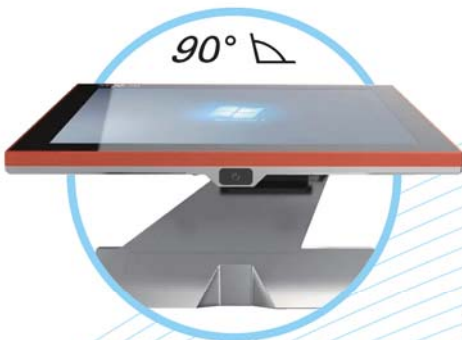

90 Degree Tilt Adjustment



Internal Power Supply
Cable Management System



Fanless / Ventless / Screwless

* Coloured units are for special order only.



SPECIFICATIONS	v5POS J19	v5POS C20	v5POS X35
PROCESSOR	Intel Quad Core Celeron J1900 2.0 GHz, up to 2.42 GHz	Intel Dual Core Celeron 3955U 2.0 GHz	Intel Dual Core i3-6100U 2.3 GHz
SYSTEM MEMORY	4 GB DDR3L RAM (up to 8 GB)	4 GB DDR4 RAM (up to 32 GB)	4 GB DDR4 RAM (up to 32 GB)
STORAGE DEVICE	64 GB M.2 SATA SSD	60 GB Half Slim SSD (removable) / up to 240 GB SSD	

DISPLAY

SIZE / RESOLUTION	15" TFT LCD (LED backlight) / 1024 x 768 pixels
BRIGHTNESS	300 cd/m ²
TOUCH SCREEN PANEL	Projected capacitive touch

I/O INTERFACE

USB PORT	4 x USB 2.0		
SERIAL PORT	2 x DB9	1 x DB9, 2 x RJ50	1 x DB9, 2 x RJ50
VIDEO PORT	1 x VGA		
AUDIO PORT	2 x built-in speakers / 1 x 3.5 mm Mic in / Line out		
CASH DRAWER	1 x RJ12 (24 V)		
ETHERNET PORT	1 x 10/100/1000 Mbps		

OPERATING SYSTEM

WINDOWS	POSReady 7 / 7 Pro / 10 IoT / 10 Pro
---------	--------------------------------------

ENVIRONMENT & MECHANICAL SPECIFICATIONS

DIMENSIONS & WEIGHT	366 (W) x 290 (H) x 193 (D) mm 7.5 kg
CHASSIS MATERIAL	Die-cast aluminium
IP RATING	IP54 whole unit
TEMPERATURE	Operating: 0°C to 40°C Storage: -20°C to 60°C
HUMIDITY	Operating: 0% to 80% Storage: 10% to 90%
POWER CONSUMPTION	12 V / 5 A, internal power adaptor, 100-240 V, 50/60 Hz

MODEL OPTIONS

INTEGRATED CARD READERS	3-track MSR, RFID (125 kHz, 13.56 MHz), IC card reader
CUSTOMER DISPLAY	10" / 15" TFT LCD or 2-line VFD
WIRELESS LAN	Integrated 802.11 b/g/n/ac + Bluetooth 4.1
COLOURED FRAME	Black (standard) White/Red/Green/Blue (special order)
COLOURED UNIT	Black (standard) Gold/Silver (special order)

ALL PRODUCT SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

The Senor Building

65 & 67 Weaver Street
Coopers Plains
QLD 4108, Australia

www.senortech.com.au

P: +61 7 3275 5888
F: +61 7 3275 5800
sales@senortech.com.au



Quality. Safety. Versatility.