## **PROTECTIVE BARRIERS**

## **DESIGNED FOR THE MOST SEVERE GUARDING NEEDS**

- Select Single, Double or Triple Rail Systems Straight and Corner Barriers
- · Corner Barriers are 42" Long Per Side
- Manufactured from Impact-Resistant 4" X 4" X 7 ga. Square Tubing
- · All Joints Double-Welded
- ½" X 11" X 11" Base Plate with 7/8" Diameter Holes for Secure Mounting -Anchoring Hardware NOT Provided
- · Plastic End Caps Provided on All Rails
- · Safety Yellow Enamel Finish Provides High Visibility





## • SINGLE RAIL SYSTEM


MODEL NO.	RAIL LENGTH	HEIGHT	WEIGHT
XRAS15-4	4'	15"	117 lbs.
XRAS15-6	6'		127 lbs.
XRAS15-8	8'		138 lbs.
XCGRS15	42"		155 lbs.


#### • DOUBLE RAIL SYSTEM

	MODEL NO.	RAIL LENGTH	HEIGHT	WEIGHT
ĺ	XRAD29.5-4	4'	29½"	190 lbs.
	XRAD29.5-6	6'		211 lbs.
	XRAD29.5-8	8'		232 lbs.
ĺ	XCGRD29.5	42"		246 lbs.

### • TRIPLE RAIL SYSTEM

MODEL NO.	RAIL LENGTH	HEIGHT	WEIGHT
XRAT44-4	4'	44"	215 lbs.
XRAT44-6	6'		270 lbs.
XRAT44-8	8'		326 lbs.
XCGRT44	42"		338 lbs.

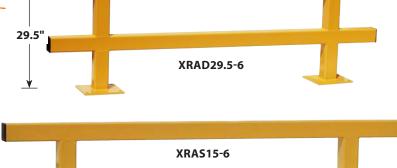

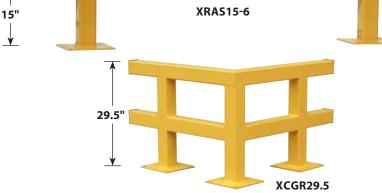

# **MACHINERY AND RACK GUARDS**

# PROTECT EXPENSIVE MACHINERY FROM FORK TRUCKS AND POWERED EQUIPMENT

- Select Rail Heights of 10", 24" or 42" and Lengths of 36" or 48"
- Fabricated From Thick Wall 5" X 5" X  $^{3}\!\!/_{16}$ " Steel Tubing
- ½" X 11" X 11" Base Plates Are Pre-Drilled with Four ½" Diameter Holes Anchoring Hardware NOT Provided
- · High Visibility Safety Yellow Enamel Finish
- Double-Welded Construction



MODEL NO.	RAIL LENGTH	HEIGHT	WEIGHT
MRG-1036	36"	10"	75 lbs.
MRG-1048	48"		87 lbs.
MRG-2436	36"	24"	103 lbs.
MRG-2448	48"		115 lbs.
MRG-4236	36"	42"	140 lbs.
MRG-4248	48"		152 lbs.





56 BUYER'S GUIDE GUARDS AND BOLLARDS