



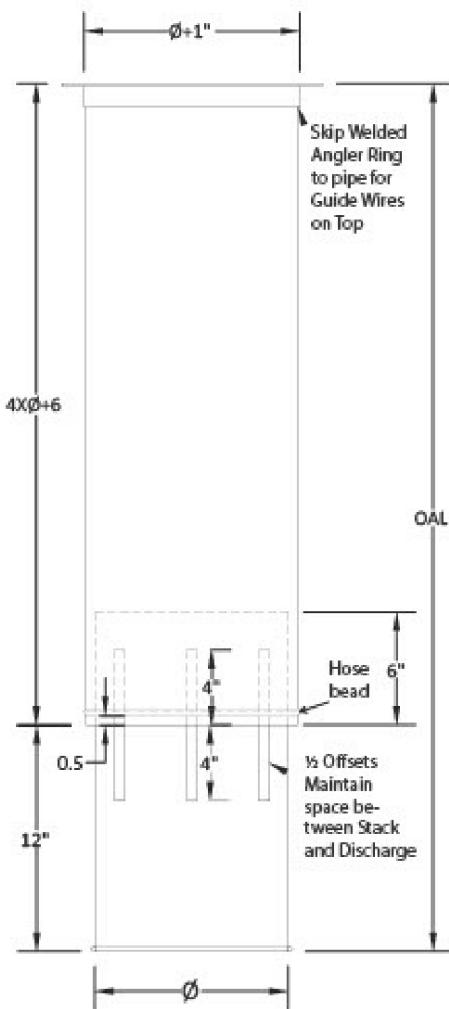

No-Loss Stack

- Available in Galvanized and Stainless Steel
- Typically, second duct has a length that is four times the diameter (4 x D)
- Calculated in cubic feet per minute (CFM)

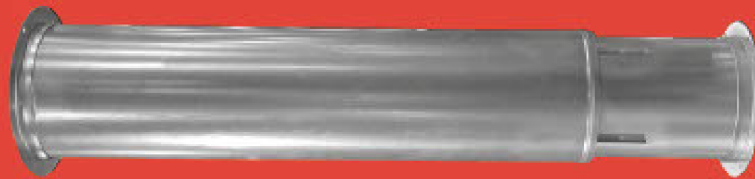

Please consult the chart, sizes 18 and up made in multiple pieces

No-Loss Stacks					
SIZEØ	4xØ+6		OAL	# of standoff's	# of Ang. fls
3	18	1 pc.	30	4	1
4	22	1 pc.	34	4	1
5	26	1 pc.	38	4	1
6	30	1 pc.	42	4	1
7	34	1 pc.	46	4	1
8	38	1 pc.	50	4	1
9	42	1 pc.	54	4	1
10	46	1 pc.	58	4	1
12	54	1 pc.	66	4	1
14	62	1 pcs.	74	6	1
16	70	1 pc.	82	6	3
18	78	2 pcs. @ 39	90	6	3
20	86	2 pcs. @ 43	98	8	3
22	94	2 pcs. @ 47	106	8	3
24	102	2 pcs. @ 51	114	8	3
26	110	2 pcs. @ 55	122	8	3
28	118	2 pcs. @ 59	130	8	3
30	126	3 pcs. @ 42	138	8	5
32	134	3 pcs. @ 44 5/8	146	8	5
34	142	3 pcs. @ 47 3/8	154	8	5
36	150	3 pcs. @ 50	162	10	5
38	158	3 pcs. @ 52 5/8	170	10	5
40	166	3 pcs. @ 55 3/8	178	10	5

LW	Laser weld	Seam Construction
MW	MIG Welded Seam	Seam Construction