



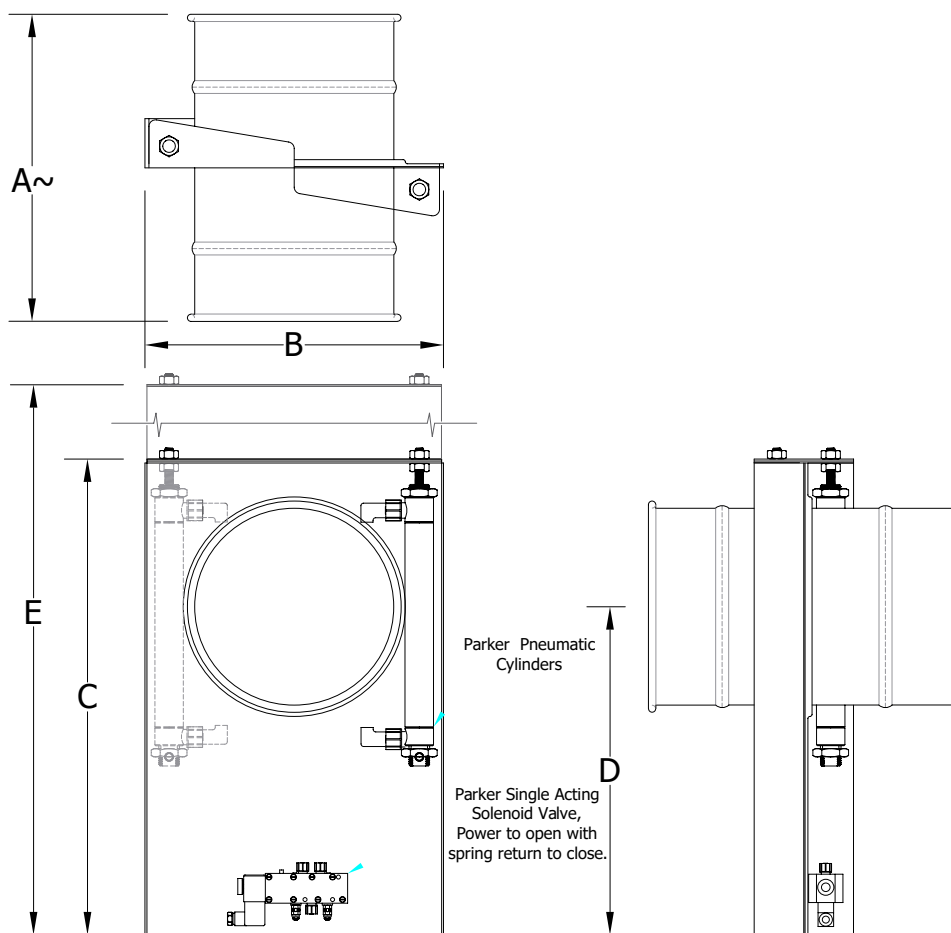

## Auto Gate w/ Seals

Sealed Air Tight Blast Gate, with UHMW seals are electrically controlled, pneumatically operated gates. The solenoid is activated by a electrical signal (12/24 V AC/DC, or 110/220 voltage) and then controls the air flow to the air cylinder. The cylinder requires 90 psi to operate. 9" and larger have two cylinders to ensure smooth operation.

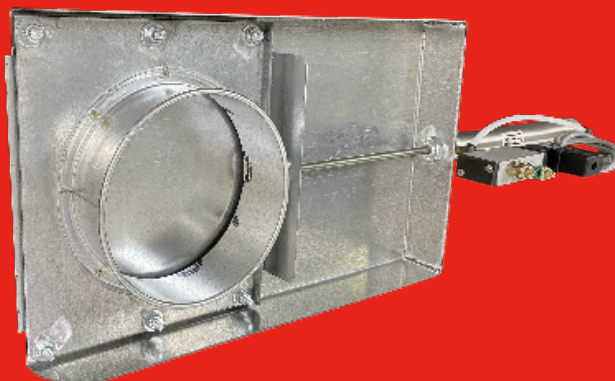

Size ø	A	B	C	D	E is W/ Gate Open	Sliding Pl. Thickness	Shell/ Body
4	10	6.97	10.43	7.17	15.75	14GA.	16GA.
5	10	7.95	12.40	8.66	18.78	14GA.	16GA.
6	10	8.94	14.37	10.04	21.65	14GA.	16GA.
7	10	10.91	18.31	13.11	27.56	14GA.	16GA.
8	10	10.91	19.33	13.11	27.72	14GA.	16GA.
9	11	13.70	22.04	15.87	33.46	12GA.	14GA.
10	11.5	14.57	22.05	15.87	33.46	12GA.	14GA.
12	11.5	16.54	28.43	20.20	40.20	12GA.	14GA.

