

Haara



The branching frame of the Haara has a delicate and finely engineered structure, making a unique design statement in any space.

Bespoke service available. Integral LED lighting.

**Hanging -** Fully adjustable drop height on 1.2mm stainless steel suspension cables.

Light Source - Glass diffusers.

LED lights, CRI>95, ~ 50K hours life.

LED standard colour temperature options: 2.7k and 3k (other

temperatures available on request)

Power to fixtures: Via suspension cables.

Light Output: decorative lighting element only.

Indicative Lumen level available on request.

LED Driver - Triac Dimmable (5%-100%) as standard,

all dimming protocols available on request.

Wattage dependent on sizing. Class II driver as standard.

Output Voltage: 24V.

Input Voltage: 110V-230V-277V, to be specified.


Bespoke options and design service available.


All fittings and installation instructions are provided.

## Maintenance

Clean with smooth and dry cloth. Do not use any ammonia, solvents or abrasives. No user serviceable components. Refer to instruction manual for detailed cleaning instructions.

Contact CDH for further technical details/downloads: technical@camerondesignhouse.com https://camerondesignhouse.com

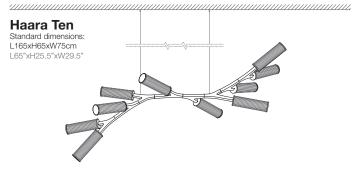

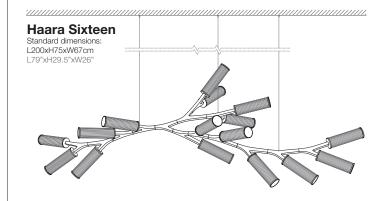

Custom hanging option available.

## Finishes and Materials Options - Size limitation for some finishes, contact CDH for a formal quotation.

