



Lahti100

The Lahti100 configuration changes the impact this pendant has on a space, while staying true to the original aesthetic of simplicity and elegance.

Profile size: 100x50mm.
From 80 to 220cm diameters. Larger sizes available.

Hanging Fully adjustable drop height on 1.2mm stainless steel suspension cables.

Light Source External or internal multifaceted clear diffusers. Integral LED lighting.

LED matrix, CRI>95, ~ 50K hours life.

LED standard colour temperature options: 2.7k and 3k (other temperatures available on request)

Power to fixtures: Via suspension cables up to 150Watt.

Light Output: decorative lighting element only.

Indicative Lumen level available on request.

LED Driver Triac Dimmable (5%-100%) as standard, all dimming protocols available on request.

Wattage dependent on sizing.

Output Voltage: 24V.

Input Voltage: 110V-230V-277V, to be specified.

Maintenance

Clean with smooth and dry cloth. Do not use any ammonia, solvents or abrasives. No user serviceable components. Contact Cameron Design House for further information.

Bespoke options and design service available.

All fittings and installation instructions are provided.

Contact CDH for further technical details/downloads:


technical@camerondesignhouse.com

camerondesignhouse.com

Direct Attach


Lahti100 Single

Standard dimensions:
80/100/120/150cm
32"/40"/47"/59"

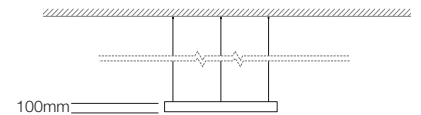

Lahti100 Cluster

Standard dimensions:
80,100,120
32",40",47"

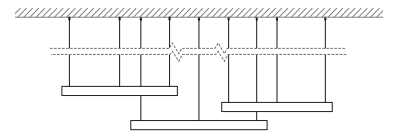

Direct attach as standard. Download our "Standard hanging option" spec for further information. Custom option available.



Conforms to UL Std.: 2108

Finishes and Materials Options - Size limitation for some finishes, contact CDH for a formal quotation.

Polished Metal	Brass	Almond Gold	Rose Gold	Natural Copper*	Chrome	Nickel	Black Nickel
Brushed Metal	Brass	Almond Gold	Rose Gold	Natural Copper*	Chrome	Nickel	Black Nickel
Powder Coat	Full range of Ral Colours available						

*Will tarnish over time