

# 3590EGT

3590EGT "GRAPHIC TOUCH": Touch Screen weight indicator for industrial applications



Digital weight indicator with a big touch screen display, suitable for advanced industrial applications. It allows the visualization of all the weighing data and the customization of the screens, simplifying the user operations. Fitted with 3 serial ports, transmission protocols for data communication, completely configurable printouts, integrated alibi memory, and port for connection to barcode/badge reader. CE-M approvable (OIML R-76 / EN 45501).

### MAIN FEATURES

- Backlit graphic display with touch screen technology, lxh= 120x90mm size.
- Multilanguage software.
- 15-key alphanumerical waterproof keyboard.
- 3-way control light.
- Selectable QWERTY, AZERTY o QWERTZ keyboard integrated in the touch screen.
- Stainless steel waterproof IP68 enclosure, with new IP68 protection system.
- Dimensions: 280x143x185 mm.
- Suitable for use on the table, column, or wall.
- Real time clock and permanent data storage.
- Fitted alibi memory, integrated on the motherboard.
- Slot for built-in micro SD for recording the configuration, logos, and customized screens (upon request).
- Functions available with DINITOOLS utility
  - Configuration, data entry and print formatting
  - Recording and filing of all the information on PC.
  - Complete retrieval of the configuration.
  - Instrument calibration with numeric values.
  - Customization of the screens.
- 24-bit A/D converter, 4 channels, up to 3200 conv./sec. and up to 8 signal linearisation points.
- 4 independent analogue channels (up to 2 in the E-AF03 version) for reading of the weight.
- Connection with up to 16 analogue load cells of 350 Ohm (45 load cells of 1000 Ohm) and with the main digital load cells available on the main digi
- Up to 10.000e OIML or 3 x 3000e @ 0,3  $\mu$ V/d CE-M legal for trade.
- Up to 1.000.000 displayable divisions for internal factory use, with internal resolution up to 3.000.000 points.
- Connectable to printers and labellers with free programmation of the printout formats.
- 110-240 Vac power supply.

### MAIN CERTIFICATIONS

- EC Type Approval (EN45501)
- OIML R76
- OIML R51 MID
- OIML R134 (AF09)

### **APPLICATION SOFTWARE**

- <u>A F O 1</u>: Totalization and formula weighing (integrated)
- AFO2: Pieces/quantity counting (optional)
- AFO3: Weighbridges Input/Output vehicle (optional)
- AFO4: Statistical checking of prepackaged goods (optional)
- AFO5: Price compunting and industrial labelling (optional)
- AFO8: Wheel and axle static weighing with 2 or various platforms (optional)
- BATCH1: Single product dosage systems in loading and unloading (optional)

# **CUSTOMISED APPLICATIONS**


Thanks to our integrated development, you can create complete customised applications in autonomy:

- · wizards, operator messages
- serial port management, protocols customization
- digital I/O full management
- sequential or simultaneous automations
- data entry, custom archives

Dini Argeo can offer the service of custom development programs.

# **CUSTOMIZABLE SCREENS**

• Thanks to the programmable Touch Screen Display, you can create custom-made interfaces for any application:

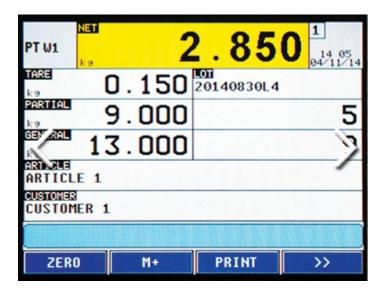

DETAIL 1 DETAIL 2



3590EGT with IP65 INOX printer



3590EGTXT01BC Stainless steel weight indicator with touch screen display.



GRAVITATION LTD.

UNIT 2B SECTION 5 DUNSHAUGHLIN - - CO. MEATH - IRELAND

Tel. 00353469078900 Fax. 00353469078911 E-mail info@gravitation.ie Web www.gravitation.ie