




DAC160

"DAC160": 16bit ANALOGUE PROGRAMMABLE OUTPUT

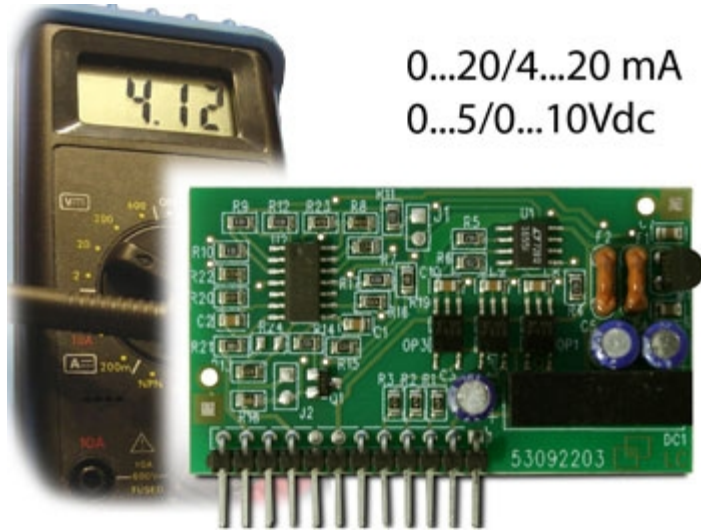

0...20/4...20 mA
0...5/0...10Vdc

Optoisolated 16 bit analogue output, in voltage or in current. Programmable as 0...5/0...10Vdc, 0...20/4...20mA through the indicator or through the PC with Dinitools. Particularly suitable for use with PLC's and in industrial environments.

The best solution
for advanced industrial
applications

TECHNICAL FEATURES:

- Output values programmable through the indicator or through the PC Dinitools: 0...5/0...10Vdc or 0...20/4...20mA.
- 16 bit resolution (65536 divisions).
- Update frequency: from 30 to 50Hz (depending on the weight indicator).
- Precision: minimum 0,15%, typical 0,08% in relation to the F.S.O. of the analogue output.
- Maximum applicable resistance on the output in current: 350 ohm.
- Minimum applicable resistance on the output in voltage: 10 Kohm.
- Easily configurable through the indicator or through the PC using Dinitools.
- NOTE: this board is an option available only when ordering the weight indicator.



GRAVITATION LTD.

UNIT 2B SECTION 5 DUNSHAUGHLIN - - CO. MEATH - IRELAND

Tel. 00353469078900

Fax. 00353469078911

E-mail info@gravitation.ie

Web www.gravitation.ie

All the specifications and images can be subject to variations and upgrades without prior notice.