

## DGTPF

DGTPF: MICROCONTROLLER FOR INDUSTRIAL DOSAGE SYSTEMS



High performing microcontroller for panel mounting; through simple programming of the parameters, it offers the possibility to manage single product dosage systems in loading or in unloading, or multiproduct dosages and mixtures.

The best solution  
for advanced industrial  
applications

## MAIN FEATURES

- Easy to use 5-key waterproof keyboard.
- Highly efficient red LED display with 6 20-mm digits and 6 LEDs for showing active functions.
- Case for panel mounting. Dimensions: 143,5 x 72 x 129mm(lxhxw). Drill template: 135,6 x 66,5 x 120mm(lxhxw).
- A/D 24-bit sigma-delta conversion with 4 channels, up to 200 conv./sec. autoselect.
- Management of a weighing system from 1 to 4 channels (cells) with digital equalization.
- Connectable with up to 16 analogue load cells with 350 Ohm input resistance.
- Up to 1.000.000 displayable divisions with internal resolution up to 3.000.000 points.
- Calibration, Set-Up parameters, configurable from keyboard or PC with Dinitools.
- Up to 8 signal linearization points with DINITOOLS (3 from keypad).
- Time Date.
- Memory back-up for recording dosage data in case it's accidentally turned off.
- Printing the dosage and consumption data.
- From 12 Vdc to 24 Vdc power supply.

## MAIN CERTIFICATIONS




- EC Type Approval (EN45501)
- OIML R76
- OIML R61 - MID

## I/O SECTION

- 1 RS232/C or RS485 bidirectional port configurable for connection to PC or external units.
- 1 RS232/C bidirectional port configurable for connection to printer.
- Six 150 mA 48 Vac / 150 mA 60 Vdc (NO) photomofet outputs configurable according to the selected dosage function.
- Four 12÷24 Vdc, 5 mA min - 20 mA max inputs (optoisolator photocouplers) with functions dependent on the selected dosage function.
- Analogue 16 bit output (only for DGTPFAN model), configurable as 4-20mA, 0-5Vdc or 0-10Vdc. Maximum load applicable on the output current: 350Ohm. Minimum load applicable on the output voltage: 10kOhm.

## DOSAGE CONFIGURATION

- Available dosage functions:

	<p><u>Single product dosage in loading functioning</u></p>
	<p><u>Single product dosage in unloading functioning</u></p>
	<p><u>Multi-product dosage functioning</u></p>



www.diniargeo.com



“YOUR WORLDWIDE PARTNER FOR WEIGHING,”

**DINI AR GEO**  
**FRANCE sarl**  
Nogent-sur-Marne  
info.fr@diniargeo.com

**DINI AR GEO**  
**GMBH**  
Sinsheim - Germany  
info.de@diniargeo.com

**DINI AR GEO**  
**UK Ltd**  
Taunton - United Kingdom  
info.uk@diniargeo.com

**DINI AR GEO WEIGHING**  
**INSTRUMENTS Ltd**  
Shanghai - China  
info.cn@diniargeo.com

**DINI AR GEO**  
**WEIGHBRIDGES**  
Calto (RO) – Italy  
info@diniargeo.com




**HEAD OFFICE**

Via Della Fisica, 20  
41042 Spezzano di Fiorano Modena - Italy  
Tel. +39.0536 843418 Fax. +39.0536 843521  
info@diniargeo.com

**SERVICE ASSISTANCE**

Via Dell'Elettronica, 15  
41042 Spezzano di Fiorano Modena - Italy  
Tel. +39.0536 921784 Fax. +39.0536 926654  
service@diniargeo.com

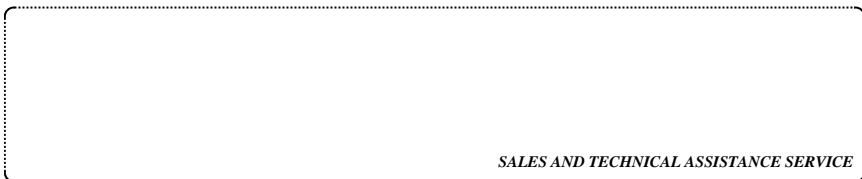

SALES AND TECHNICAL ASSISTANCE SERVICE