


Parcel scales KERN EOB · EOS



KERN EOB

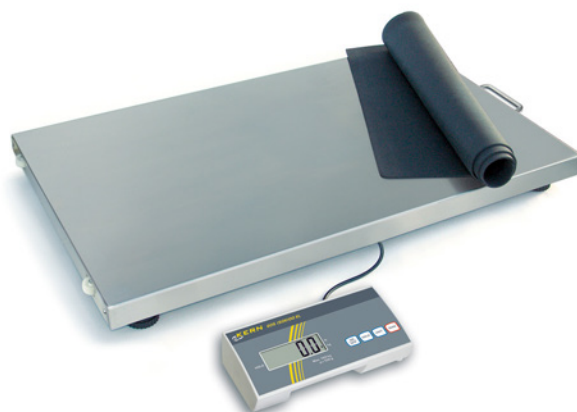

KERN EOS

The bestsellers in parcel- and veterinary scales, also with XL platform, and big weighing ranges

Features

- **Stainless steel weighing plate**, painted steel base
- **Simple and convenient 4-key operation**
- **Wall mount** for display device, standard
- **Vibration-free weighing:** When the weighing conditions are unstable, a stable weight is calculated determining an average value

EOS:

- The scale can be easily transported using 2 rollers and a handle and does not require much storage space

Technical data

- Large LCD display, digit height 25 mm

- Dimensions of display device WxDxH 210x110x45 mm
- Cable length of display device approx. 1,8 m
- Optional battery operation, 6 x 1.5 V AA not included, operating time up to 60 h
- Permissible ambient temperature 10 °C / 35 °C

EOB:

- Dimensions of weighing plate WxDxH
 - A 315x305x65 mm
 - B 550x550x65 mm, see enlarged picture
 - C 945x505x65 mm

EOS:

- Dimensions of weighing plate (stainless steel) WxDxH
 - D 900x550x60 mm

Accessories

- **1 Stand** to elevate display device, height of stand approx. 950 mm, can be retrofitted, KERN MWS-A01

EOB:

- **Non-slip rubber mat**, only for models with weighing plate size **C**, KERN EOE-A01
- **2 Stand** to elevate display device, height of stand approx. 450 mm, only for models with weighing plate size **A**, can be retrofitted, KERN EOB-A01N

EOS:

- **Non-slip rubber mat** standard, can be retrofitted, KERN EOS-A01

STANDARD



OPTION



Model	Weighing range [Max] kg	Readout [d] g	Reproducibility g	Linearity g	Net weight approx. kg	Weighing plate	Option	
							DAkKS KERN	DAkKS Calibr. Certificate
KERN								
EOB 15K5	15	5	5	± 10	4,8	A	963-128	
EOB 35K10	35	10	10	± 20	4,8	A	963-128	
EOB 60K20	60	20	20	± 40	4,8	A	963-129	
EOB 60K20L	60	20	20	± 40	14	B	963-129	
EOB 150K50	150	50	50	± 100	4,8	A	963-129	
EOB 150K50L	150	50	50	± 100	14	B	963-129	
EOB 150K50XL	150	50	50	± 100	19	C	963-129	
EOB 300K100A	300	100	100	± 200	4,8	A	963-129	
EOB 300K100L	300	100	100	± 200	14	B	963-129	
EOB 300K100XL	300	100	100	± 200	19	C	963-129	
EOS 150K50XL	150	50	50	± 100	20,1	D	963-129	
EOS 300K100XL	300	100	100	± 200	20,1	D	963-129	

KERN Pictograms

 Internal adjusting: Quick setting up of the balance's accuracy with internal adjusting weight (motordriven).	 Recipe level A: Separate memory for the weight of the tare container and the recipe ingredients (net total).	 Suspended weighing: Load support with hook on the underside of the balance.
 Adjusting program CAL: For quick setting up of the balance's accuracy. External adjusting weight required.	 Recipe level B: Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through display.	 Battery operation: Ready for battery operation. The battery type is specified for each device.
 Memory: Balance memory capacity, e.g. for article data, weighing data, tare weights, PLU etc.	 Recipe level C: Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through display. Additional convenient functions, such as barcode and back calculation functions.	 Rechargeable battery pack: Rechargeable set.
 Data interface RS-232: To connect the balance to a printer, PC or network.	 Totalising level A: The weights of similar items can be added together and the total can be printed out.	 Mains adapter: 230V/50Hz in standard version for EU. On request GB, AUS or USA version available.
 RS-485 data interface: To connect the balance to a printer, PC or other peripherals. High tolerance against electromagnetic disturbance.	 Totalising level C: Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through display. Additional convenient functions, such as barcode and back calculation.	 Power supply: Integrated in balance. 230V/50Hz standard EU. More standards e.g. GB, AUS or USA on request.
 USB data interface: To connect the balance to a printer, PC or other peripherals.	 Strain gauges: Electrical resistor on an elastic deforming body.	 Tuning fork principle: A resonating body is electromagnetically excited, causing it to oscillate.
 Bluetooth data interface: To transfer data from the balance to a printer, PC or other peripherals.	 Percentage determination: Determining the deviation in % from the target value (100 %).	 Electromagnetic force compensation: Coil inside a permanent magnet. For the most accurate weighings.
 WLAN data interface: To transfer data from the balance to a printer, PC or other peripherals.	 Weighing units: Can be switched to e.g. non-metric units at the touch of a key. See balance model. Please refer to KERN's website for more details.	 Single cell technology: Advanced version of the force compensation principle with the highest level of precision.
 Control outputs (optocoupler, digital I/O): To connect relays, signal lamps, valves, etc.	 Weighing with tolerance range: Upper and lower limiting values can be programmed individually for e.g. dosing, sorting and portioning.	 Verification possible: The time required for verification is specified in the pictogram.
 Interface for second balance: For direct connection of a second balance.	 Vibration-free weighing: (Animal weighing program) When the weighing conditions are unstable, a stable weight is calculated as an average value.	 DAkkS calibration possible: The time required for DAkkS calibration is shown in days in the pictogram.
 Network interface: For connecting the scale to an Ethernet network. With KERN products you can use a universal RS-232/LAN converter.	 Protection against dust and water splashes IPxx: The type of protection is shown in the pictogram. For details see the glossary.	 Package shipment: The time required for internal shipping preparations is shown in days in the pictogram.
 GLP/ISO log: The balance displays the weight, date and time, regardless of a printer connection.	 ATEX explosion protection: Suitable for use in hazardous industrial environments, in which there is explosion danger. The ATEX marking is specified for each device.	 Pallet shipment: The time required for internal shipping preparations is shown in days in the pictogram.
 GLP/ISO log: With weight, date and time. Only with KERN printers, see "Accessories"	 Stainless steel: The balance is protected against corrosion.	 Warranty: The warranty period is shown in the pictogram.
 Piece counting: Reference quantities selectable. Display can be switched from piece to weight.		

Precision is our business

To ensure the high precision of your balance KERN offers you the the appropriate test weight in the international OIML error limit classes E1-M3 from 1 mg - 2000 kg. In combination with a DAkkS calibration certificate the best pre-requisite for proper balance calibration.

The KERN DAkkS calibration laboratory today is one of the most modern and best-equipped DAkkS calibration laboratories for balances, test weights and force-measurement in Europe.

Your KERN specialist dealer:

Thanks to the high level of automation, we can carry out DAkkS calibration of balances, test weights and force-measuring devices 24 hours a day, 7 days a week.

Range of services:

- DAkkS calibration of balances with a maximum load of up to 6 t
- DAkkS calibration of weights in the range of 1 mg - 500 kg
- Database supported management of checking equipment and reminder service
- Calibration of force-measuring devices
- DAkkS calibration certificates in the following languages D, GB, F, I, E, NL