

MCWK

MCWK "PROFESSIONAL" SERIES STAINLESS STEEL CRANE SCALES



Stainless steel crane scales, with large 40mm DOT LED display, for maximum visibility from any angle and in any light condition, also with direct sunlight. Sturdy and reliable, usable in any environment, inside or outside. Minimum reduction of the lifting space of the crane. IP67 protection, from dust and rain. Available also CE-M APPROVED. Fitted with test certificate obtained with sample weights.

The best solution
for advanced industrial
applications

MAIN FEATURES

- Large DOT LED very bright 40mm display, which guarantees a perfect weight visibility from any angle, also from a long distance.
Usable in any internal or external environment, with good visibility also in full sunlight.
- Adjustable brightness intensity.
- Sturdy structure in STAINLESS steel, with IP 67 protection of the load cell and the electronics, against dust and watersprays.
- Fitted with approved upper galvanised shackle and lower swivelling hook.
- Extremely reduced distance between upper shackle and lower hook.
- Precision: +/- 0.03% F.S.
- Waterproof keypad with 5 keys: ZERO, AUTOMATIC TARE, MODE, PRINT and ON/OFF.
- Programmable digital filter, for an excellent weight visualisation in any working condition.
- Programmable turn-off function: automatic, from keypad or from remote control.
- Fitted with radiofrequency 6-key remote control, configurable as only automatic tare or as remote keypad.
- Configurable functioning mode at choice, such as PEAK (maximum read value), HOLD (lock of displayed weight), weights totalisation, lb/kg conversion (for other available functions see DFW indicator).
- Predisposed for 866MHz radio interface or WiFi, connection to PC, or remote terminal and printer.
- Rechargeable battery, with average life of about 30 hours.
- Predisposed for optional second extractable battery for 24/7 continuous use.
- Fitted with 230 Vac 50 Hz battery charger.
- Digital calibration and Set-Up programmable directly from keyboard or from PC through Dinitools.
- Operating temperature range: -10/+40 °C.
- Weight: about 25kg (including packing).

AVAILABLE FUNCTIONS FROM REMOTE CONTROL

- Zero; tare; enable / disable function; print; switch-off.

OPTIONS ONLY AVAILABLE AT TIME OF ORDER

- RF weight transmission to remote indicator up to over 70m indoors
- WI-FI interface
- Remote weight indicator (see DFW., 3590., TRS., DGT60.. Series' indicators) with printer connected through radio frequency
- ACCREDIA calibration certificate according to OIML/ASTM standards.

VERSIONS

Available versions

Code	Max (kg)	d (kg)	d* HR (kg)	M (kg)
MCWK6	3000/6000	1/2	0,5/1	--
M MCWK6M	3000/6000		--	1/2

(*) The HR division is obtainable only with the relative EHR option



www.diniargeo.com



“YOUR WORLDWIDE PARTNER FOR WEIGHING,”

DINI ARGEO
FRANCE sarl
Nogent-sur-Marne
info.fr@diniargeo.com

DINI ARGEO
GMBH
Sinsheim - Germany
info.de@diniargeo.com

DINI ARGEO
UK Ltd
Taunton - United Kingdom
info.uk@diniargeo.com

DINI ARGEO WEIGHING
INSTRUMENTS Ltd
Shanghai - China
info.cn@diniargeo.com

DINI ARGEO
WEIGHBRIDGES
Calto (RO) – Italy
info@diniargeo.com




HEAD OFFICE

Via Della Fisica, 20
41042 Spezzano di Fiorano Modena - Italy
Tel. +39.0536 843418 Fax. +39.0536 843521
info@diniargeo.com

SERVICE ASSISTANCE

Via Dell'Elettronica, 15
41042 Spezzano di Fiorano Modena - Italy
Tel. +39.0536 921784 Fax. +39.0536 926654
service@diniargeo.com

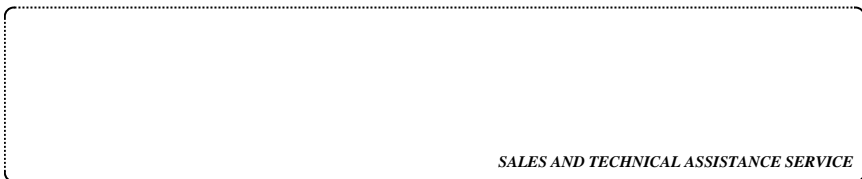

SALES AND TECHNICAL ASSISTANCE SERVICE