



RCPT

"RCPT" ANALOG LOAD CELL SERIES



Compression load cell for CE-M approved weighbridges, tanks, silos, etc. Completely manufactured in steel, and fitted with selfaligned articulated joints, selfcentering plates and protection washer.

CAPACITIES (kg): 20000, 30000, 50000.

OIML R60. C3 precision class.

Stainless steel with alloy steel body. IP68 protection.

The best solution
for advanced industrial
applications

MAIN FEATURES

- C3 PRECISION CLASSES.
- STAINLESS STEEL with SPECIAL ALLOY STEEL BODY; MANUFACTURED WITH LASER SOLDERINGS.
- OPTIMISED FOR PARALLEL CONNECTION.
- IP68 PROTECTION DEGREE.
- CAPACITY FROM 20000 TO 50000 kg.
- FITTED WITH SELF-ALIGNED ARTICULATED JOINTS, SELF-CENTERING PLATES AND PROTECTION WASHER.
- SHIELDED 14m CONNECTION CABLE.
- TEST CERTIFICATE AVAILABLE UPON REQUEST.

TECHNICAL FEATURES


- Minimum load cell verification interval: $V_{min} = E_{Max} / 10.000$
- Maximum number of load cell divisions: $n_{LC} = 3000$ (C3)
- Sensitivity: $2mV/V \pm 0,1\%$
- Temperature effect on full scale: $0,002\% / ^\circ C$
- Temperature effect on zero: $0,002\% / ^\circ C$
- Compensated Temperature Range: $-10^\circ C / +40^\circ C$
- Operating Temperature Range: $-30^\circ C / +70^\circ C$
- Creep error after 30 minutes: $0,02\%$ F.S.
- Excitation voltage from 5 to 15 VDC
- Input Resistance: 700 ± 20 Ohm
- Output Resistance: 703 ± 7 Ohm
- Zero Balance: $\pm 1\%$ F.S.
- Insulation Resistance: >5000 MOhm
- Safe Overload: $>150\%$ F.S.
- Ultimate Overload: 250% F.S.
- 4-wire shielded cable, 14m long, 5mm diameter.

ATEX Version

- The CCATEX certificate makes the load cell suitable for use in hazardous areas with protection methods according to:
ATEX II 1G Ex ia IIC T6 (Ta $-20 \div +40^\circ C$) TX (Ta $-20 \div +65^\circ C$) Ga
ATEX II 1D Ex ta IIIC TX $^\circ C$ (Ta $-20 \div +40^\circ C$) TX $^\circ C$ (Ta $-20 \div +65^\circ C$) Da IP65.
The certificate includes the manual and the ATEX CE conformity declaration (available in EN, DE, FR, and IT).
- IMPORTANT: the certificate refers to the single load cell. For systems with more load cells, it is necessary to order one certificate for each load cell.

Wiring Code	
Colour	Function
GREEN	OUTPUT +
WHITE	OUTPUT -
RED	INPUT +
BLACK	INPUT -

DETAIL 1

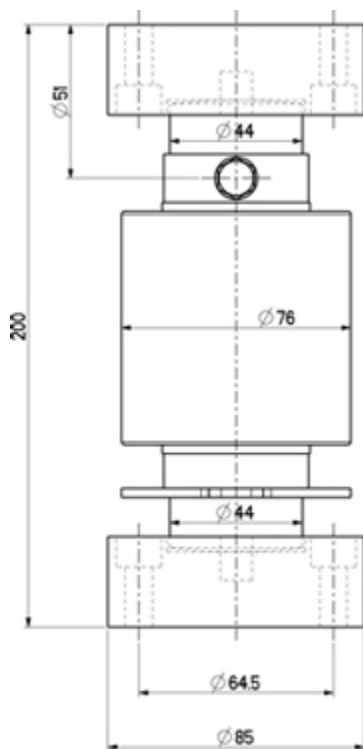

RCP: dimensions in mm.

VERSIONS

Versioni disponibili

Codice	Max (kg)
RCPT20C3	20000
RCPT30C3	30000
RCPT50C3	50000



GRAVITATION LTD.

UNIT 2B SECTION 5 DUNSHAUGHLIN - - CO. MEATH - IRELAND

Tel. 00353469078900

Fax. 00353469078911

E-mail info@gravitation.ie

Web www.gravitation.ie

All the specifications and images can be subject to variations and upgrades without prior notice.