



www.VedGroup.net

The Ved Group is one of India's top Philips Professional & Retail Lighting companies. The Ved Group is an authorized Philips Lighting Business Partner for the entire Philips family of lighting products that delivers complete lighting solutions, from components and lamps to luminaires and integrated systems. We are authorized Philips Business Partners for:

- Philips Professional Lighting
- Philips Home Decorative Lighting and Philips Hue Personal Wireless Lighting
- Philips Dynalite - Lighting Control, Energy Management, Home & Building Automation
- Philips Switches
- Philips Special Lighting
- Philips Lighting Components
- Philips UV and Special Application Lamps

PHILIPS

Professional Lighting



Your **Vision.**
Our **Solutions.**

Effective 1st March, 2019

Contents

Introduction

Indoor Commercial	7
Suspended - Surface Mounted Luminaires	8
Recessed Mounted Luminaires	13
Commercial Batten	19
Downlighters & Spots Lighting	20
Tracks & Spots	24
Trunking & Coves	27
Indoor Industrial	28
Highbays	30
LED Bulkhead & WellGlass	33
Industrial Battens	35
Waterproof LED Luminaires	36
Cleanroom	37
InteractPro	38
Outdoor	42
Street Lighting	44
Flood Lighting	48
Landscape Lighting	51
Architectural Lighting	55
Solar Lighting	62
OccuSwitch	66
LED lamps	68



Philips **LED lighting**

Leading the market today,
transforming the future.

Philips has been designing, developing and manufacturing LED lighting products resulting in a far reaching intellectual property portfolio and more than 20,000 time-tested installations. We have strengthened our leadership position and revenue generation in the LED Lighting market with solutions across segments, offices, retails, industries and public. We are leaders in technology and product performance in the LED lighting industry and are a confident choice of lighting specifiers across the globe.





Indoor Commercial



Suspended-Surface Mounted Luminaires

PureLine

Extruded Aluminium Suspended Diffused Office Lighting Solutions with up-down light distribution, available in standalone and continuous mounting versions in 4ft & 8ft run lengths.



Type	HSN Code	MRP (INR)
SP680P LED34S 6500 PSU WH L120 S1	9405	7,000/-
SP680X1 LED34S 6500 PSU WH L120 S1	9405	7,000/-
SP680X2 LED34S 6500 PSU WH L120 S1	9405	7,000/-
SP680P LED39S 6500 PSU WH L120 S1	9405	7,000/-
SP680X1 LED39S 6500 PSU WH L120 S1	9405	7,000/-
SP680X2 LED39S 6500 PSU WH L120 S1	9405	7,000/-
SP680P LED68S 6500 PSU WH L240 S1	9405	14,000/-
SP680X1 LED68S 6500 PSU WH L240 S1	9405	14,000/-
SP680X2 LED68S 6500 PSU WH L240 S1	9405	14,000/-
SP680P LED78S 6500 PSU WH L240 S1	9405	14,000/-
SP680X1 LED78S 6500 PSU WH L240 S1	9405	14,000/-
SP680X2 LED78S 6500 PSU WH L240 S1	9405	14,000/-
SP680X END KIT	9405	250/-
ZPH680 N1000 (Single Wire)	9405	350/-
ZPH680 N1500 (Single Wire)	9405	400/-
ZPH680 N2000 (Single Wire)	9405	450/-

Also available in 4000K CCT & DALI Version in both 4 ft and 8 ft variant. SP680P is standalone & SP680X1/x2 is continuous mounting options, respectively.

Pureline Slim Surface & Suspended

Suspended and Surface mounted 60mm & 75mm aluminium extruded linear lighting luminaires with superior anodized aluminium finish. Multiple options of light distribution, run lengths, color options and lumen packages for different application to choose from.



Type	HSN Code	MRP (INR)
SP780 P LED26S-6500 PSU W6L112 OD SI	9405	9,000/-
SP780 X LED22S-6500 PSU W6L112 OD SI	9405	8,300/-
SP780 X LED26S-6500 PSU W6L112 OD SI	9405	8,500/-
SP781 P LED33S-6500 PSU W6L112 OD SI	9405	10,000/-
SP781 X LED22S-6500 PSU W6L112 OD SI	9405	9,300/-
SP781 X LED27S-6500 PSU W6L112 OD SI	9405	9,500/-
SP780 P LED26S-6500 PSU W7L112 OD SI	9405	9,000/-
SP780 X LED23S-6500 PSU W7L112 OD SI	9405	8,300/-
SP780 X LED26S-6500 PSU W7L112 OD SI	9405	8,500/-
SP781 P LED33S-6500 PSU W7L112 OD SI	9405	10,000/-
SP781 X LED23S-6500 PSU W7L112 OD SI	9405	9,300/-
SP781 X LED27S-6500 PSU W7L112 OD SI	9405	9,500/-
SP780P LED52S-6500 PSU W6L224 OD SI	9405	18,000/-
SP780X LED44S-6500 PSU W6L224 OD SI	9405	16,600/-
SP780X LED52S-6500 PSU W6L224 OD SI	9405	17,000/-
SP781P LED66S-6500 PSU W6L224 OD SI	9405	20,000/-
SP781X LED44S-6500 PSU W6L224 OD SI	9405	18,600/-
SP781X LED54S-6500 PSU W6L224 OD SI	9405	19,000/-
SP780P LED52S-6500 PSU W7L224 OD SI	9405	18,000/-
SP780X LED46S-6500 PSU W7L224 OD SI	9405	16,600/-
SP780X LED52S-6500 PSU W7L224 OD SI	9405	17,000/-
SP781P LED66S-6500 PSU W7L224 OD SI	9405	20,000/-
SP781X LED46S-6500 PSU W7L224 OD SI	9405	18,600/-
SP781X LED54S-6500 PSU W7L224 OD SI	9405	19,000/-
ZPH780 N1000	9405	350/-
ZPH780 N1500	9405	350/-
ZPH780 N2000	9405	350/-
SP780 EP60 GREY	9405	150/-
SP780 EP75 GREY	9405	150/-
ZPH780 1MTR 3C.75SQ mm Transparent Cable	9405	400/-
ZPH780 1MTR 5C.75SQ mm Transparent Cable	9405	400/-

Also available in 4000 CCT & DALI variant. W6: 60mm width & W7: 75mm Width. L112: 1120mm Length & W224-2240mm Length. SP780/781P - standalone & SP780/781X - continuous mounting Luminaire. SP780: only Downward light distribution & SP781: Up & down light distribution. Suspension, End Plates & Transparent cable required to mount this luminaire.



Pureline Taper

PureLine Taper is an elegant suspended lighting solution with taper end (bottom width of 60mm & top width of 50mm), it also has option of designer end caps which provide design inspiration through geometric patterns. Multiple option of light distribution, run lengths, color options & lumen pack for different application available.



Type	HSN Code	MRP (INR)
SP811P LED33S-6500 PSU W6L120 OD SI	9405	10,000/-
SP810P LED26S-6500 PSU W6L120 OD SI	9405	9,000/-
SP811X LED22S-6500 PSU W6L120 OD SI	9405	9,300/-
SP811X LED27S-6500 PSU W6L120 OD SI	9405	9,500/-
SP810X LED22S-6500 PSU W6L120 OD SI	9405	8,300/-
SP810X LED26S-6500 PSU W6L120 OD SI	9405	8,500/-
SP811P LED33S-6500 PSD W6L120 OD SI	9405	11,500/-
SP810P LED26S-6500 PSD W6L120 OD SI	9405	10,500/-
SP811X LED22S-6500 PSD W6L120 OD SI	9405	10,800/-
SP811X LED27S-6500 PSD W6L120 OD SI	9405	11,000/-
SP810X LED22S-6500 PSD W6L120 OD SI	9405	9,800/-
SP810X LED26S-6500 PSD W6L120 OD SI	9405	10,000/-
SP811P LED66S-6500 PSU W6L240 OD SI	9405	20,000/-
SP810P LED52S-6500 PSU W6L240 OD SI	9405	18,000/-
SP811X LED44S-6500 PSU W6L240 OD SI	9405	18,600/-
SP811X LED54S-6500 PSU W6L240 OD SI	9405	19,000/-
SP810X LED44S-6500 PSU W6L240 OD SI	9405	16,600/-
SP810X LED52S-6500 PSU W6L240 OD SI	9405	17,000/-
SP811P LED60S-6500 PSD W6L240 OD SI	9405	23,000/-
SP810P LED52S-6500 PSD W6L240 OD SI	9405	21,000/-
SP811X LED44S-6500 PSD W6L240 OD SI	9405	21,600/-
SP811X LED54S-6500 PSD W6L240 OD SI	9405	22,000/-
SP810X LED44S-6500 PSD W6L240 OD SI	9405	19,600/-
SP810X LED52S-6500 PSD W6L240 OD SI	9405	20,000/-
SP810 EP GR	9405	150/-
SP810 EP TAPER GR	9405	250/-

Available in 4000K, L112-1120mm Length & L240-2240mm length, SP811/810P-Standalone & SP811/810X-Continuous variant, SP811: up & down light & SP810: only downward light. Suspension, End plates & Transparent cable are accessories and required for mounting. Suspension Kit to be ordered separately, refer Pureline Slim accessories list for suspension & transparent cable detail.

Pureline Slim Connector

Pureline Slim Family can be conjoined in multiple way like L, +, T, Y etc



Type	HSN Code	MRP (INR)
SP781X LED44S-6K PSU W6 SI L CONN 22X2	9405	On request
SP780X LED44S-6K PSU W6 SI L CONN 22X2	9405	On request
SP781X LED66S-6K PSU W6 SI T CONN 22X3	9405	On request
SP780X LED66S-6K PSU W6 SI T CONN 22X3	9405	On request
SP781X LED88S-6K PSU W6 SI P CONN 22X4	9405	On request
SP780X LED88S-6K PSU W6 SI P CONN 22X4	9405	On request

SmartBrite Surface

Low height general purpose suspended/surface mounted LED luminaire with diffused optics offering perfect illumination for indoor space.



Type	HSN Code	MRP (INR)
SM270C LED 30S 6500 PSU WH	9405	5,500/-
SM270C LED 30S 4000 PSU WH	9405	5,500/-

Cirrus Surface

Surface Mounted general purpose square shaped luminaire with low height CRCA housing and high transmittivity diffuser suitable for office application. Available in options of white & grey housing with profLED & flat diffuser.



Type	HSN Code	MRP (INR)
SM365C LED32-6500 PSU OD GR	9405	5,100/-
SM365C LED32-6500 PSU OD WH	9405	5,100/-
SM366C LED32-6500 PSU OD GR	9405	5,100/-
SM366C LED32-6500 PSU OD WH	9405	5,100/-

Also available in 4000K CCT.

Cirrus Mini Pro

Cirrus Mini Pro is a general lighting application luminaire (with a dimension of 312mm X 312mm), a perfect solution for all surface mount indoor general lighting application.



Type	HSN Code	MRP (INR)
SM200C LED16S 6500 PSU OD WH	9405	3,100/-
SM200C LED15S 4000 PSU OD WH	9405	3,100/-
SM200C LED11S 6500 PSU OD WH	9405	2,450/-
SM200C LED10S 4000 PSU OD WH	9405	2,450/-



Recessed Mounted Luminaires

Pureline Slim Recess

Recessed Mounted 60mm & 75mm aluminium extruded linear lighting luminaires with superior anodized aluminium finish. Multiple options of light distribution, run lengths and lumen packages for different application to choose from.



Type	HSN Code	MRP (INR)
RC780B LED26S-6500 PSU W6L120 OD SI	9405	10,000/-
RC780B LED26S-6500 PSU W7L120 OD SI	9405	10,000/-
RC780X LED22S-6500 PSU W6L120 OD SI	9405	10,000/-
RC780X LED22S-6500 PSU W7L120 OD SI	9405	10,000/-
RC780B LED52S-6500 PSU W6L240 OD SI	9405	20,000/-
RC780B LED52S-6500 PSU W7L240 OD SI	9405	20,000/-
RC780X LED44S-6500 PSU W6L240 OD SI	9405	20,000/-
RC780X LED44S-6500 PSU W7L240 OD SI	9405	20,000/-
RC780 EP60 Grey	9405	150/-
RC780 EP75 Grey	9405	150/-

Also available in 4000K CCT, DALI Version & 75mm/60mm width in both 4 ft and 8 ft variant. RC780B is standalone & RC780 X is continuous mounting options, respectively. End Plates need to be ordered separately in continuous mounting variant.

Pureline Techzone

Aluminium extruded recessed luminaire with 135mm diffused compartment available both in standalone & continuous options suitable for armstrong techzone ceiling.



Type	HSN Code	MRP (INR)
RC820B LED 26S 6500 PSU W15L120 OD SI	9405	8,000/-
RC820B LED 26S 4000 PSU W15L120 OD SI	9405	8,000/-
RC820B LED 52S 4000 PSU W15L240 OD SI	9405	16,000/-
RC820B LED 52S 4000 PSU W15L240 OD SI	9405	16,000/-

Continuous version & DALI option available

PowerBalance

Elegant, visually pleasing, extra high efficacy, office compliant recessed mounted solution suitable for grid ceiling in 2'X2' and 1'X4' form factor.



Type	HSN Code	MRP (INR)
RC600B LED40S/865 PSU W60L60 IN	9405	12,000/-
RC600B LED30S/865 PSU W30L120 IN	9405	10,000/-
RC600B LED40S/865 PSU W30L120 IN	9405	12,000/-
RC600B LED40S/865 PSD W60L60 IN	9405	13,000/-
RC600B LED30S/865 PSD W60L60 IN	9405	11,000/-
RC600B LED40S/865 PSD W30L120 IN	9405	13,000/-
RC600B LED30S/865 PSD ACW W60L60 IN	9405	18,000/-
RC600B LED40S/865 PSD ACW W60L60 IN	9405	18,000/-
RC600B LED30S/865 PSD ACW W30L120 IN	9405	18,000/-
RC600B LED40S/865 PSD ACW W30L120 IN	9405	18,000/-

Also available in 4000K





FullGlow

Fully diffused recessed mounted 2'X2' LED luminaire with high transmissive diffuser suitable for indoor spaces.



Type	HSN Code	MRP (INR)
RC380B LED25S -6500 G4 L60 W60 PSU OD	9405	4,000/-
RC380B LED30S -6500 G4 L60 W60 PSU OD	9405	4,500/-
RC380B LED36S -6500 G4 L60 W60 PSU OD	9405	5,500/-
RC380B LED42S -6500 G4 L60 W60 PSU OD	9405	6,000/-
RC380B LED25S -6500 G4 L60 W60 PSD OD	9405	5,000/-
RC380B LED30S -6500 G4 L60 W60 PSD OD	9405	5,500/-
RC380B LED36S -6500 G4 L60 W60 PSD OD	9405	6,500/-
RC380B LED42S -6500 G4 L60 W60 PSD OD	9405	7,000/-

Also available in 4000K

FullGlow 1'X4'

General purpose fully diffused recessed mounted 1'X4' LED luminaire with high transmissive diffuser suitable for indoor spaces.



Type	HSN Code	MRP (INR)
RC380B LED30S-6500 G5 L3W12 PSU OD	9405	6,500/-
RC380B LED36S-6500 G5 L3W12 PSU OD	9405	7,500/-
RC380B LED43S-6500 G5 L3W12 PSU OD	9405	8,500/-

Also available in 4000K

SmartGlow

SmartGlow is an intelligent office lighting recessed luminaire with built in PIR occupancy sensor offering flexibility of auto switching off when the space is not occupied.



Type	HSN Code	MRP (INR)
RC383B LED 36S-6500 PSU OD WH PIR	9405	6,000/-
RC383B LED 28S-6500 PSU OD WH PIR	9405	6,000/-
RC383B LED 36S-4000 PSU OD WH PIR	9405	6,000/-
RC383B LED 28S-4000 PSU OD WH PIR	9405	6,000/-

Coreview

Recessed mounted 2'X2' LED luminaire suitable for grid ceiling with indirect lighting delivering soft and uniform light for visual comfort.



Type	HSN Code	MRP (INR)
RC 420B M LED 30S 6500 PSU WH	9405	6,000/-
RC 420B M LED 30S 4000 PSU WH	9405	6,000/-
RC 420B M LED 34S 6500 PSU WH	9405	6,500/-
RC 420B M LED 34S 4000 PSU WH	9405	6,500/-
RC 420B M LED 30S 6500 PSD WH	9405	7,000/-
RC 420B M LED 30S 4000 PSD WH	9405	7,000/-
RC 420B M LED 34S 6500 PSD WH	9405	7,500/-
RC 420B M LED 34S 4000 PSD WH	9405	7,500/-

FullGlow Office Compliant

Fully diffused recessed mounted 2'X2' LED luminaire with UGR <19, offering comfortable experience to occupants of indoor spaces.



Type	HSN Code	MRP (INR)
RC380B LED30S -6500 G4 L60 W60 PSU OD OC	9405	5,000/-
RC380B LED30S -4000 G4 L60 W60 PSU OD OC	9405	5,000/-
RC380B LED36S -6500 G4 L60 W60 PSU OD OC	9405	6,000/-
RC380B LED36S -4000 G4 L60 W60 PSU OD OC	9405	6,000/-
RC380B LED30S -6500 G4 L60 W60 PSD OD WH OC	9405	6,000/-
RC380B LED30S -4000 G4 L60 W60 PSD OD WH OC	9405	6,000/-
RC380B LED36S -6500 G4 L60 W60 PSD OD WH OC	9405	7,000/-
RC380B LED36S -4000 G4 L60 W60 PSD OD WH OC	9405	7,000/-

GreenSquare

General purpose recessed mounted 2'X2' LED luminaire with central light exit and profiled CRCA housing for better and soothing light distribution.



Type	HSN Code	MRP (INR)
RC140B LED30S-6500 PSU WH OD	9405	4,400/-
RC140B LED30S-4000 PSU WH OD	9405	4,400/-
RC140B LED30S-6500 PSD WH OD	9405	5,400/-
RC140B LED30S-4000 PSD WH OD	9405	5,400/-
RC140B LED30S-6500 PSR WH OD	9405	5,400/-
RC140B LED30S-4000 PSR WH OD	9405	5,400/-

Dayline

General purpose recessed mounted 2'X2' LED luminaire with differentiated form factor set this apart in indoor space.



Type	HSN Code	MRP (INR)
RC240B LED33S-6500 PSU OD WH	9405	4,800/-
RC240B LED33S-6500 PSD OD WH	9405	6,500/-

Also available in 4000K

Cirrus

Recessed mounted general purpose square shaped luminaire with high transmittivity diffuser suitable for office application. Available in options of white & grey housing with profiled & flat diffuser.



Type	HSN Code	MRP (INR)
RC365B LED33-6500 PSU OD GR	9405	4,800/-
RC365B LED33-6500 PSU OD WH	9405	4,800/-
RC366B LED33-6500 PSU OD GR	9405	4,800/-
RC366B LED33-6500 PSU OD WH	9405	4,800/-

Also available in 4000K & DALI version



Commercial Batten

SmartBright

Extruded Aluminium batten available in 2ft & 4ft run length with multiple lumen packages and suitable for Surface, Wall & Conduit mounting (with accessories).



Type	HSN Code	MRP (INR)
BN021C LED20S PSU CW GR S2	9405	850/-
BN 021 LED10S- 6500 PSU GR S1	9405	570/-
BN 021 LED25S 6500 PSU GR S1	9405	950/-

Also available in 4000K

Smartbrite Xtra

Extruded Aluminium batten for continuous operation and available in 4ft run length, suitable for Surface, Wall & Conduit mounting (with accessories).



Type	HSN Code	MRP (INR)
BN100C LED40S-6500 PSU L120 GR	9405	2,200/-

Also available in 4000K

Downlighters & Spot Lighting

GreenPerform Sleek

GreenPerform Sleek is a high performance low-height LED downlighter suited for requirements of any modern professional workspace. Robust PDC housing ensures long system. Narrow rim renders a pleasing aesthetic look.



Type	HSN Code	MRP (INR)
DN295B LED6S-3000 PSU WH	9405	1,400/-
DN295B LED6S-4000 PSU WH	9405	1,400/-
DN295B LED6S-6500 PSU WH	9405	1,400/-
DN295B LED8S-3000 PSU WH	9405	1,550/-
DN295B LED8S-4000 PSU WH	9405	1,550/-
DN295B LED8S-6500 PSU WH	9405	1,550/-
DN295B LED10S-3000 PSU WH	9405	1,700/-
DN295B LED10S-4000 PSU WH	9405	1,700/-
DN295B LED10S-6500 PSU WH	9405	1,700/-
DN296B LED12S-3000 PSU WH	9405	2,100/-
DN296B LED12S-4000 PSU WH	9405	2,100/-
DN296B LED12S-6500 PSU WH	9405	2,100/-
DN296B LED15S-3000 PSU WH	9405	2,500/-
DN296B LED15S-4000 PSU WH	9405	2,500/-
DN296B LED15S-6500 PSU WH	9405	2,500/-

Also available in 2000 lumen & in DALI version.

GreenSpot Gen 2

Adjustable recessed spot for a unique look in the ceiling.



Type	HSN Code	MRP (INR)
DN311B LED6S-4000 PSU MB WH	9405	3,250/-
DN311B LED12S-4000 PSU MB WH	9405	3,550/-
DN311B LED6S-5000 PSR MB WH	9405	3,300/-
DN311B LED6S-5000 PSU MB WH	9405	3,000/-
DN311B LED12S-5000 PSR MB WH	9405	3,800/-
DN311B LED12S-5000 PSU MB WH	9405	3,500/-

Wide beam option also available.



Sleek Surface Downlight

Slim profile surface mounted downlight with options of 700 to 2000 lumen.



Type	HSN Code	MRP (INR)
SM250C LED7S- 6500 PSU WH	9405	1,100/-
SM250C LED12S- 6500 PSU WH	9405	1,200/-
SM251C LED16S- 6500 PSU WH	9405	1,750/-
SM250C LED12S- 6500 PSU WH	9405	1,200/-
SM251C LED20S- 6500 PSU WH	9405	1,950/-

Available in Round and Square form factors in 3000K and 4000K.

GreenLED I Spot

Semi recessed spot light with 80mm cut out for accent lighting in retail spaces.



Type	HSN Code	MRP (INR)
DN190B LED3S-6500 PSU WH	9405	1,400/-
DN189B LED3S-6500 PSU WH MB	9405	1,500/-

Also available in 3000K and 4000K

GreenLED Ultima Square

Ultra sleek recessed downlight for low height false ceiling in square profile.



Type	HSN Code	MRP (INR)
DN096B LED6S-6500 PSU WH	9405	1,580/-
DN097B LED10S-6500 PSU WH	9405	1,980/-

Also available in 3000K and 4000K

GreenLED Ultima Round

Ultra sleek recessed downlight for low height false ceiling in round profile.



Type	HSN Code	MRP (INR)
DN091B LED6S-6500 PSU WH	9405	1,580/-
DN092B LED10S-6500 PSU WH	9405	1,980/-

Also available in 3000K and 4000K

SkySpot COB

- New series of LED Spot fixtures specially designed for Commercial use
- Ideal for retail showrooms, hospitality, offices
- Elegant fixed spot with a focused 36 degree beam angle
- Long life with 30,000 burning hours with CRI>80
- Wide choice: Available in 7/12/18/22W, Round, 3000K & 6500K



Type	HSN Code	MRP (INR)
7W Sky Spot COB (WW)	9405	1,415/-
7W Sky Spot COB (CW)	9405	1,415/-
12W Sky Spot COB (WW)	9405	1,415/-
12W Sky Spot COB (CW)	9405	1,765/-
18W Sky Spot COB (WW)	9405	1,765/-
18W Sky Spot COB (CW)	9405	1,765/-
22W Sky Spot COB (WW)	9405	2,200/-
22W Sky Spot COB (CW)	9405	2,200/-



Green LED I

- High performance LED Downlights for commercial applications
- 100 lumen / watt efficacy
- Efficient heat sink (die cast) with Steel clips
- Integrated driver control (for easy installation)



Type	HSN Code	MRP (INR)
DN191B LED6S-3000 PSU WH S2	9405	1,415/-
DN191B LED6S-4000 PSU WH S2	9405	1,415/-
DN191B LED6S-6500 PSU WH S2	9405	1,415/-
DN192B LED10S-3000 PSU WH S2	9405	1,765/-
DN192B LED10S-4000 PSU WH S2	9405	1,765/-
DN192B LED10S-6500 PSU WH S2	9405	1,765/-
DN193B LED12S-3000 PSU WH S2	9405	2,200/-
DN193B LED12S-4000 PSU WH S2	9405	2,200/-
DN193B LED12S-6500 PSU WH S2	9405	2,200/-
DN194B LED16S-3000 PSU WH S2	9405	2,750/-
DN194B LED16S-4000 PSU WH S2	9405	2,750/-
DN194B LED16S-6500 PSU WH S2	9405	2,750/-
DN195B LED20S-3000 PSU WH S2	9405	3,300/-
DN195B LED20S-4000 PSU WH S2	9405	3,300/-
DN195B LED20S-6500 PSU WH S2	9405	3,300/-



Track & Spot Lighting

Style State Track

Track mounted accent lighting luminaire with no external gear box and magnetic hinge arrangement for easy aiming and perfect punch in the beam.



Type	HSN Code	MRP (INR)
ST916T LED20/940 PSU 1C MB BK IN	9405	15,000/-
ST916T LED20/940 PSU 1C NB BK IN	9405	15,000/-
ST916T LED20/940 PSU 1C WB BK IN	9405	15,000/-

Flex Accent G2

Track mounted accent lighting luminaire with compact housing and slim gear box with Color rendering Index of 90.



Type	HSN Code	MRP (INR)
ST391T LED10/930 PSU-E NB 1C WH IN	9405	5,000/-
ST391T LED20/930 PSU-E NB 1C WH IN	9405	5,800/-
ST391T LED30/930 PSU-E NB 1C WH IN	9405	6,400/-
ST391T LED35/930 PSU-E NB 1C WH IN	9405	6,800/-

ST series available in MB/WB optics & 4000K

EcoAccent

Recessed mounted Accent Lighting luminaire with diecast aluminum heat sink and sand grain finishing reflector, available in two lumen packs with option of DALI dimmable driver.



Type	HSN Code	MRP (INR)
RS271B LED20/830 PSU-E NB WH	9405	6,500/-
RS271B LED20/830 PSU-E MB WH	9405	6,500/-
RS271B LED20/830 PSU-E WB WH	9405	6,500/-
RS271B LED20/840 PSU-E NB WH	9405	6,500/-
RS271B LED20/840 PSU-E MB WH	9405	6,500/-
RS271B LED20/840 PSU-E WB WH	9405	6,500/-
RS271B LED20/850 PSU-E NB WH	9405	6,500/-
RS271B LED20/850 PSU-E MB WH	9405	6,500/-
RS271B LED20/850 PSU-E WB WH	9405	6,500/-
RS271B LED40/830 PSU-E MB WH	9405	6,500/-
RS271B LED40/830 PSU-E WB WH	9405	6,500/-
RS271B LED40/840 PSU-E MB WH	9405	6,500/-
RS271B LED40/840 PSU-E WB WH	9405	6,500/-
RS271B LED40/850 PSU-E MB WH	9405	6,500/-
RS271B LED40/850 PSU-E WB WH	9405	6,500/-
RS271B LED20/850 PSD NB WH	9405	7,500/-
RS271B LED20/840 PSD NB WH	9405	7,500/-
RS271B LED20/830 PSD NB WH	9405	7,500/-
RS271B LED20/850 PSD MB WH	9405	7,500/-
RS271B LED20/840 PSD MB WH	9405	7,500/-
RS271B LED20/830 PSD MB WH	9405	7,500/-
RS271B LED20/850 PSD WB WH	9405	7,500/-
RS271B LED20/840 PSD WB WH	9405	7,500/-
RS271B LED20/830 PSD WB WH	9405	7,500/-
RS271B LED40/850 PSD MB WH	9405	8,000/-
RS271B LED40/840 PSD MB WH	9405	8,000/-
RS271B LED40/830 PSD MB WH	9405	8,000/-
RS271B LED40/850 PSD WB WH	9405	8,000/-
RS271B LED40/840 PSD WB WH	9405	8,000/-
RS271B LED40/830 PSD WB WH	9405	8,000/-



EcoAccent Track

Track mounted accent lighting luminaire in pressure diecast housing with two options of lumen pack. Track of 1M and 2M available to be ordered separately.



Type	HSN Code	MRP (INR)
ST271T LED20/830 PSU-E NB 1C BK	9405	6,500/-
ST271T LED20/830 PSU-E MB 1C BK	9405	6,500/-
ST271T LED20/830 PSU-E WB 1C BK	9405	6,500/-
ST271T LED20/840 PSU-E MB 1C BK	9405	6,500/-
ST271T LED20/850 PSU-E MB 1C BK	9405	6,500/-
ST271T LED20/830 PSU-E MB 1C WH	9405	6,500/-
ST271T LED20/840 PSU-E MB 1C WH	9405	6,500/-
ST271T LED20/840 PSU-E WB 1C BK	9405	6,500/-
ST271T LED20/850 PSU-E WB 1C BK	9405	6,500/-
ST271T LED20/840 PSU-E NB 1C BK	9405	6,500/-
ST271T LED40/830 PSU-E NB 1C BK	9405	7,000/-
ST271T LED40/830 PSU-E WB 1C BK	9405	7,000/-
ST271T LED40/840 PSU-E NB 1C BK	9405	7,000/-
ST271T LED40/840 PSU-E MB 1C BK	9405	7,000/-
ST271T LED40/840 PSU-E WB 1C BK	9405	7,000/-
ST271T LED40/850 PSU-E MB 1C BK	9405	7,000/-
ST271T LED40/850 PSU-E WB 1C BK	9405	7,000/-
ST271T LED40/840 PSU-E MB 1C WH	9405	7,000/-
ST271T LED40/830 PSU-E MB 1C WH	9405	7,000/-
ST271T LED40/850 PSU-E NB 1C BK	9405	7,000/-

Trunking

Optimus LED Trunking

Trunking based solution for large open areas with high ceiling requiring continuous linear installation. Luminaire is snap fit mount on trunking system, available in two lumen packs. Accessories need to be additionally ordered.



Type	HSN Code	MRP (INR)
LL199X 1XDLED40-6500 PSE OD WH S1	9405	4,500/-
LL199X 1XDLED40-4000 PSE OD WH S1	9405	4,500/-
LL199X 1XDLED40-3000 PSE OD WH S1	9405	4,500/-
LL199X 1XDLED57-3000 PSE OD WH	9405	6,200/-
LL199X 1XDLED57-4000 PSE OD WH	9405	6,200/-
LL199X 1XDLED57-6500 PSE OD WH	9405	6,200/-
TTX199/03LED	9405	3,000/-
TTX199/01 LED	9405	1,000/-
ZTX199 BC LED	9405	350/-
ZTX200 SMS	9405	600/-
ZTX200 EP	9405	120/-

Also available in IP54 version on request.

Coves

SkyCove LED Strip

New 5 meter LED Strip especially designed for commercial use.

- Ideal for retail showrooms, hospitality & offices
- Driver included in pack (24W output)
- Long life with 20,000 hours
- Available in 3000K & 6500K



Type	HSN Code	MRP (INR)
LED Strip SKYCove 5M WW with driver	9405	1,540/-
LED Strip SKYCove 5M CDL with driver	9405	1,540/-



Indoor
Industrial

Highbays

Maxolid

IP65, PDC LED Highbay with circular form factor and available in both Narrow & Wide beam optics options of toughened glass & PC cover to choose from.



Type	HSN Code	MRP (INR)
BY415P LED145S CW HE NB FG PSU GR XTFCL S5	9405	18,000/-
BY415P LED145S CW HE WB FG PSU GR XTFCL S5	9405	18,000/-
BY415P LED145S CW NB FG PSD GR S5	9405	19,000/-
BY415P LED145S CW WB FG PSD GR S5	9405	19,000/-
BY415P LED145S CW NB PC PSU GR S5	9405	18,000/-
BY415P LED145S CW WB PC PSU GR S5	9405	18,000/-
BY415P LED145S CW NB PC PSD GR S5	9405	19,000/-
BY415P LED145S CW WB PC PSD GR S5	9405	19,000/-
BY415P LED160S CW HE NB FG PSU GR XTFCL S5	9405	22,000/-
BY415P LED160S CW HE WB FG PSU GR XTFCL S5	9405	22,000/-
BY415P LED160S CW NB FG PSD GR S5	9405	23,000/-
BY415P LED160S CW WB FG PSD GR S5	9405	23,000/-

Also available in 4000K CCT

Maxolid NI

Non integral IP65, PDC LED Highbay with circular form factor and available in both Narrow & Wide beam optics, options of toughened glass & PC cover to choose from.



Type	HSN Code	MRP (INR)
BY416P LED240S CW SK60 FG GR NI S5	9405	20,000/-
BY416P LED240S CW SY20 FG GR NI S5	9405	20,000/-
ZVS431 2x100W PSU XTFCL	9405	5,000/-
ZVS431 2x100W PSU XTFCL(IP65)	9405	7,500/-

DuraLED Highbay

IP66 & IK08 protected LED Highbay solution with PDC housing, toughened & shattered proof glass available in both Narrow & Wide beam optics.



Type	HSN Code	MRP (INR)
BY325P LED100S CW PSU GR FG NB XTFCL V1	9405	12,000/-
BY325P LED100S CW PSU GR FG WB XTFCL V1	9405	12,000/-
BY325P LED130S CW PSU GR FG NB XTFCL V1	9405	14,500/-
BY325P LED130S CW PSU GR FG WB XTFCL V1	9405	14,500/-
BY325P LED160S CW PSU GR FG NB XTFCL V1	9405	17,000/-
BY325P LED160S CW PSU GR FG WB XTFCL V1	9405	17,000/-
BY325P LED195S CW PSU GR FG NB XTFCL V1	9405	22,000/-
BY325P LED195S CW PSU GR FG WB XTFCL V1	9405	22,000/-

Durabay Prime

Durabay Prime is IP66 & IK08 protected next gen highbay solution with PDC housing, delivers uniform light distribution with both NB &WB optics.



Type	HSN Code	MRP (INR)
BY225P LED100S CW NB PSU FG GR V1	9405	12,000/-
BY225P LED100S CW WB PSU FG GR V1	9405	12,000/-

Also available in 13500 lumen

GreenUp

Greenup is a Liner highbay solution with three different optics option(NB,WB & HRO-High rack Optic) makes it apt for wide application areas in industry, warehouse & retail.



Type	HSN Code	MRP (INR)
BY560P LED105/CW PSU WB IN	9405	11,500/-
BY560P LED105/CW PSU HRO IN	9405	12,500/-
BY560P LED160/CW PSU WB IN	9405	16,500/-
BY560P LED160/CW PSU NB IN	9405	16,500/-
BY560P LED160/CW PSU HRO IN	9405	17,500/-
BY560P LED210/CW PSU WB IN	9405	20,000/-
BY560P LED210/CW PSU NB IN	9405	20,000/-
BY560P LED210/CW PSU HRO IN	9405	21,000/-

DALI version available in selective lumen category



Mini 200

Mini 200 is an intuitive under canopy luminaire suitable for petrol station, sport complex, community center lighting. It has PDC housing, IP66 & IK08 protection & precision control optics- choice of both Symmetric & Asymmetric version available.



Type	HSN Code	MRP (INR)
BY286V LED90S CW SK PSU FG WH	9405	11,000/-
BY286V LED90S CW AK PSU FG WH	9405	11,000/-
BY286V LED85S CW SK PSU FG WH	9405	10,000/-
BY286V LED85S CW AK PSU FG WH	9405	10,000/-

EnduraLED Midbay

Robust & reliable IP66 & IK08 protected LED midbay with PDC housing & toughened glass suitable for ceiling (Surface/Suspended) mount & available in Wide beam (Rotational Symmetric) optics.



Type	HSN Code	MRP (INR)
BY150P LED76S CW PSU HE SY120 FG GR	9405	9,500/-
BY150P LED76S CW PSU HE SY120 FG GR LILO	9405	10,000/-

GreenBay

Versatile Highbay family designed to address Recessed and Suspended Lighting application in Industries with multiple options of optics. Mounting accessories to be ordered separately.



Type	HSN Code	MRP (INR)
BY400V LED72S CW AK PSU S2 FG WH	9405	13,500/-
BY400V LED145S CW AK PSU S2 FG WH	9405	18,500/-
BY400V LED72S CW SK PSU S2 FG WH	9405	13,500/-
BY400V LED110S CW SK PSU S2 FG WH	9405	16,500/-
BY400V LED145S CW SK PSU S2 FG WH	9405	18,500/-
BY400V LED72S CW SY60 PSU S2 FG WH	9405	13,500/-
BY400V LED110S CW SY60 PSU S2 FG WH	9405	16,500/-
BY400V LED145S CW SY60 PSU S2 FG WH	9405	18,500/-
BY400V LED72S CW SY110 PSU S2 FG WH	9405	13,500/-
BY400V LED110S CW SY110 PSU S2 FG WH	9405	16,500/-
BY400V LED145S CW SY110 PSU S2 FG WH	9405	18,500/-
BY400V LED110S CW AK PSU S2 FG WH	9405	16,500/-
AC400Z WH	9405	800/-
AC400B WH-RECESS	9405	1,600/-
AC400C WH-SURFACE	9405	1,800/-
AC400P WH-SUSPENDED	9405	3,500/-

LED Bulkhead & Wellglass

EnduraLED Wellglass Highlumen

Robust & reliable IP66 & IK08 protected LED Wellglass luminaire with PDC housing & polycarbonate diffuser suitable for Wall & Ceiling mounting application.



Type	HSN Code	MRP (INR)
BY201P LED78S CW PSU HE PC	9405	7,200/-

LILO option available on demand.

DuraLED Wellglass

Single piece pressure die cast aluminium Wellglass with high quality PC diffuser and has multiple mounting options available (Wall, Ceiling, Eyebolt & Cradle).



Type	HSN Code	MRP (INR)
BY300P LED 27S CW PSU S1 PC	9405	4,500/-
BY300P LED 27S CW PSU S1 PC LILO	9405	5,000/-
BY300P LED 27S CW PSU S1 PC SPD	9405	5,500/-
BY300P LED 37S CW PSU S1 PC	9405	5,000/-
BY300P LED 37S CW PSU S1 PC LILO	9405	5,500/-
BY300P LED 37S CW PSU S1 PC SPD	9405	6,000/-

Also available in NW & WW

EnduraLED Bulkhead

Pressure Die cast housing LED bulkhead with IP66 Protection and IK09 impact resistance suitable for surface and wall mounting applications.



Type	HSN Code	MRP (INR)
WT202W LED6S NW PSU S2 PC	9405	1,600/-
WT202W LED6S CW PSU S2 PC	9405	1,600/-

Vistaglow

Robust & reliable LED bulk head with IP65 Protection & IK08 impact resistance suitable for surface and wall mounting applications.



Type	HSN Code	MRP (INR)
WT140W LED7S CW PSU S1 PC	9405	999/-
WT140W LED7S NW PSU S1 PC	9405	999/-



Industrial Battens

EnduraLED Next

Flicker free, high efficiency and robust industrial batten family suitable for Surface, Wall and Conduit mounting. The product family offers dimmable and connected batten option.



Type	HSN Code	MRP (INR)
BN308C LED20S-6500 L60 PSU WH	9405	1,900/-
BN308C LED20S-6500 L120 PSU WH	9405	1,950/-
BN308C LED40S-6500 L120 PSU WH	9405	3,200/-
BN308C LED60S-6500 L120 PSU WH	9405	4,400/-
BN308C LED40S-6500 L120 PSD WH	9405	4,500/-
BN308C LED20S-6500 L120 PIR WH	9405	2,950/-
BN308C LED40S-6500 L120 PIR WH	9405	4,200/-
BN308C LED60S-6500 L120 PIR WH	9405	5,400/-
Mounting Accessories		
AC308C MB S/A	9405	100/-
AC308P MB S/A	9405	100/-

Also available in 4000K & interact ready platform variant

TMC 501

Mounting rail for TLED lamps.



Type	HSN Code	MRP (INR)
TMC 501 P 1xT-LED 22W P3241	9405	500/-
TMC 501 P 2xT-LED 22W P3242	9405	600/-

Waterproof LED Luminaires

Waterproof LED Luminaire

Surface/Suspended Mounted waterproof (IP65) luminaire suitable for single and twin T8 TLED lamps.



Type	HSN Code	MRP (INR)
TCW450 P 1XTLED 19W P3397	9405	2,200/-
TCW450 P 2XTLED 19W P3397	9405	2,500/-

EnduraLED Waterproof

Dust and Waterproof LED luminaire (IP65) with Polycarbonate Housing suitable for wall & ceiling mount applications.



Type	HSN Code	MRP (INR)
WT550 C LED 40S CW PSU S1 PC	9405	5,200/-

Smartbright Waterproof

IP65, Dust and Waterproof LED luminaire with Polycarbonate Housing suitable for wall & ceiling mount applications.



Type	HSN Code	MRP (INR)
WT201C LED40S-6500 PSU L120	9405	4,000/-
WT201C LED20S-6500 PSU L120	9405	3,000/-

Also available in 4000K



Cleanroom

Cleanroom LED

Recessed Mounted 2'X2' bottom opening cleanroom luminaire available in both toughened glass and polycarbonate diffuser.



Type	HSN Code	MRP (INR)
CR652B LED33S CR CW GT	9405	8,500/-
CR652B LED33S CR CW CA	9405	8,500/-
CR652B LED33S CR NW GT	9405	8,500/-
CR652B LED33S CR NW CA	9405	8,500/-
CR652B LED56S CR CW GT	9405	10,000/-
CR652B LED56S CR CW CA	9405	10,000/-
CR652B LED56S CR NW GT	9405	10,000/-
CR652B LED56S CR NW CA	9405	10,000/-

IP65 protection for GT and IP54 protection for CA variants.

interact Pro


An intuitive app and dashboard that works with Philips InterAct Ready lamps and luminaires to bring the power of IoT.

Lights. Insights. Action.

It enables you to both control and receive data from the LED light points and sensors within the connected lighting system. You can program and automate light settings, while collecting data on where and how you use lighting. It's intuitive to set up and use. And it's the smart way to optimize energy savings.

How the connected lighting system comes together.

The **Interact Pro dashboard and app** work with a range of Philips luminaires and lamps and a set of wireless switches and sensors that are Interact Ready. You can customize the software's settings for specific workspaces. Whether you're connecting 20 light points or 200, Interact Pro helps everyone to work smarter.

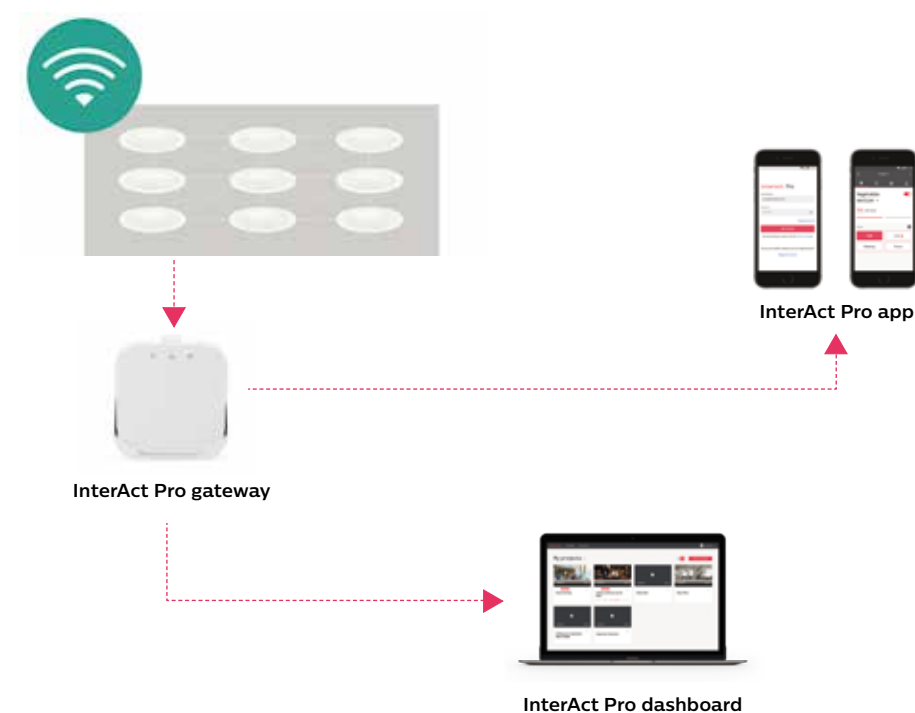

Interact Pro connected
lighting dashboard and app



Key benefits:

- Power of Personalization
- Energy usage Dashboards with failure reports
- Fast installation, no cables

How is InterAct unique?

InterAct Pro is a truly unique offering today in the market and suits all your lighting needs- whether you are building a new small office or a retail shop, or you are planning an upgrade from your existing Conventional Lighting to LED Lighting system (retrofit).

Completely Wireless Setup

Organizations today are specifically constrained in a retrofit setup to explore the benefits of connected lighting, as it requires wiring, layout changes and a deep renovation leading to significant work downtime. InterAct Pro is a completely wireless solution and hence does not require any new wirings or changes in your workplace.

Power of Simplicity

System complexity often scares organizations and workplace leaders to completely explore the benefits of connected lighting and this is specifically true for small spaces. With its Intuitive App and commissioning simplicity, InterAct Pro provides a unique connected platform.

Philips Interact Ready connected lighting

InterAct Pro software is designed to be affordable for small spaces. It works with any Philips Lighting connected LED lamps and luminaires that are Interact Ready. Sensors and wall switches are interoperable and upgradeable, meaning you're prepared for any changes the future might throw at you.

You can start saving energy straight away, with direct point-for-point replacement of conventional lights.



Type	HSN Code	MRP (INR)
DN395B LED20S-6500 IA WH	9405	6,000/-
DN395B LED20S-4000 IA WH	9405	6,000/-
DN395B LED20S-3000 IA WH	9405	6,000/-
RS271B LED40S-4000 IA MB WH	9405	8,500/-
RS271B LED40S-3000 IA MB WH	9405	8,500/-
RS271B LED20S-4000 IA MB WH	9405	8,000/-
RS271B LED20S-3000 IA MB WH	9405	8,000/-
RS271B LED40S-4000 IA WB WH	9405	8,500/-
RS271B LED40S-3000 IA WB WH	9405	8,500/-
RS271B LED20S-4000 IA WB WH	9405	8,000/-
RS271B LED20S-3000 IA WB WH	9405	8,000/-
RC380B LED36S-4000 IA W60L60 G4 OD	9405	7,500/-
RC380B LED36S-6500 IA W60L60 G4 OD	9405	7,500/-
RC380B LED30S-4000 IA W60L60 G4 OD	9405	6,500/-
RC380B LED30S-6500 IA W60L60 G4 OD	9405	6,500/-
BN308C LED40S-6500 L120 IA WH	9405	5,200/-
BN308C LED40S-4000 L120 IA WH	9405	5,200/-
Wireless Occupancy Sensor EasySmart	-	10,000/-
ZigBee Green Power Switch Dim	-	12,000/-
ProSite v20	-	1,00,000/-
ProSite v50	-	1,30,000/-
ProSite v100	-	1,50,000/-
ProSite v150	-	2,00,000/-
ProSite v200	-	2,50,000/-



Outdoor



Street Lighting

GreenLine Smart

GreenLine Smart luminaire is perfect for secondary roads and pathways. It spots a compact body which offers a highly efficient lighting solution as compared to fluorescent and CFL street lights. IP66 protection.



Type	HSN Code	MRP (INR)
BRP022 LED 10 CW MR S1 PSU GR	9405	3,300/-
BRP022 LED 20 CW MR S1 PSU GR	9405	4,000/-

SmartBright Street

SmartBright Street is an IP66 street light luminaire with finless design which offers up to 70% energy saving.



Type	HSN Code	MRP (INR)
BRP046 LED 30 CW MR S1 PSU GR	9405	4,500/-
BRP046 LED 36 CW MR S1 PSU GR	9405	5,000/-

GreenLine

GreenLine is an IP66 road lighting luminaire with high power LED and unique peanut lens to ensure uniform light distribution, higher spacing between poles and maintenance free system.



Type	HSN Code	MRP (INR)
BRP409 LED CW 036 MR FG S1 PSU GR	9405	9,200/-
BRP409 LED CW 035 NR FG S1 PSU GR	9405	9,200/-
BRP409 LED CW 034 MR PC S1 PSU GR	9405	9,200/-
BRP409 LED CW 033 NR PC S1 PSU GR	9405	9,200/-
BRP409 LED 040 CW HO MR FG S1 PSU GR	9405	8,200/-
BRP409 LED 039 CW HO NR FG S1 PSU GR	9405	8,200/-
BRP409 LED 065 CW HE MR FG S1 PSU GR	9405	11,000/-
BRP409 LED 064 CW HE NR FG S1 PSU GR	9405	11,000/-
BRP409 LED 062 CW HE MR PC S1 PSU GR	9405	11,000/-
BRP409 LED 060 CW HE NR PC S1 PSU GR	9405	11,000/-
BRP 409 LED 074 CW HE MR FG S1 PSU GR	9405	10,000/-

SmartBright Street

SmartBright Street is an IP66 street light luminaire with reliable savings and lasting brightness



Type	HSN Code	MRP (INR)
BRP062 LED 65 CW SLA S1 PSU	9405	6,000/-
BRP062 LED 68 CW SLC S1 PSU	9405	6,000/-
BRP062 LED 82 CW SLA S1 PSU	9405	8,000/-
BRP062 LED 84 CW SLC S1 PSU	9405	8,000/-

GreenLine V2

GreenLine is an IP66 road lighting luminaire with high power LED and unique peanut lens to ensure uniform light distribution, higher spacing between poles and maintenance free system.



Type	HSN Code	MRP (INR)
BRP410 LED CW 072 MR FG S1 PSU GR	9405	14,600/-
BRP410 LED CW 069 NR FG S1 PSU GR	9405	14,600/-
BRP410 LED CW 068 MR PC S1 PSU GR	9405	14,400/-
BRP410 LED CW 066 NR PC S1 PSU GR	9405	14,400/-
BRP410 LED 094 CW HE MR FG S2 PSU GR	9405	16,000/-
BRP410 LED 092 CW HE NR FG S2 PSU GR	9405	16,000/-
BRP410 LED 091 CW HE MR PC S2 PSU GR	9405	16,000/-
BRP410 LED 088 CW HE NR PC S2 PSU GR	9405	16,000/-
BRP410 LED 110 CW HE MR FG S2 PSU GR	9405	19,000/-
BRP410 LED 107 CW HE NR FG S2 PSU GR	9405	19,000/-
BRP410 LED 104 CW HE MR PC S2 PSU GR	9405	19,000/-
BRP410 LED 100 CW HE NR PC S2 PSU GR	9405	19,000/-

Skyline

Skyline is an IP66 road lighting luminaire with high power LED, top openable and integrated optics to ensure uniform distribution, higher spacing between poles and maintenance free system ideal for road width up to 8-12 mts.



Type	HSN Code	MRP (INR)
BRP 340 LED 138 CW HO SLC S1 PSU GR	9405	14,000/-
BRP 340 LED 161 CW HO SLC S1 PSU GR	9405	16,000/-
BRP 340 LED 184 CW HO SLC S1 PSU GR	9405	18,000/-



Greenline Xtra

GreenLine Xtra is an IP66 road lighting luminaire with high power LED and unique peanut lens with choice of optics to ensure uniform distribution, higher spacing between poles and maintenance free system ideal for road width up to 10-12 mts.



Type	HSN Code	MRP (INR)
BRP322 LED 142 CW MR FG S4 XTFC L GR	9405	22,000/-
BRP322 LED 137 CW NR FG S4 XTFC L GR	9405	22,000/-
BRP322 LED 134 CW MR PC S4 XTFC L GR	9405	22,000/-
BRP322 LED 129 CW NR PC S4 XTFC L GR	9405	22,000/-
BRP322 LED 163 CW MR FG S4 XTFC L GR	9405	25,000/-
BRP322 LED 157 CW NR FG S4 XTFC L GR	9405	25,000/-
BRP322 LED 154 CW MR PC S4 XTFC L GR	9405	25,000/-
BRP322 LED 148 CW NR PC S4 XTFC L GR	9405	25,000/-
BRP322 LED 202 CW MR FG S4 XTFC L GR	9405	28,000/-
BRP322 LED 195 CW NR FG S4 XTFC L GR	9405	28,000/-
BRP322 LED 240 CW MR FG S4 XTFC L GR	9405	32,000/-
BRP322 LED 232 CW NR FG S4 XTFC L GR	9405	32,000/-
BRP322 LED 278 CW MR FG S4 XTFC L GR	9405	36,000/-
BRP322 LED 269 CW NR FG S4 XTFC L GR	9405	36,000/-

Flood Lighting

Uniflood

Uniflood is an integral flood light with driver inside a PDC housing. It is highly efficient, reliable and sturdy compared to similar LED, Halogen and Metal Halide flood lights.



Type	HSN Code	MRP (INR)
BVP120 LED 35 CW FG S1 PSU GR	9405	7,500/-
BVP120 LED 70 CW FG S1 PSU GR	9405	13,500/-

Tango Mini Flood Light

Versatile floodlight, packed with features to suit diverse floodlighting applications. It ensures savings on initial capital, and also delivers reliable operational savings.



Type	HSN Code	MRP (INR)
BVP192 LED82 CW HO NB FG GR PSU	9405	10,000/-
BVP192 LED110 CW HO NB FG GR PSU	9405	12,000/-

Uniflood 2

Uniflood is an integral flood light with driver inside a PDC housing. It is highly efficient, reliable and sturdy compared to similar LED, Halogen and Metal Halide flood lights.



Type	HSN Code	MRP (INR)
BVP122 LED 105 CW HE AK55° FG XTFCL S4	9405	22,000/-
BVP122 LED 115 CW HE SY20° FG XTFCL S4	9405	22,000/-
BVP122 LED 115 CW HE NB FG XTFCL S4	9405	22,000/-
BVP122 LED 124 CW HE AK55° FG XTFCL S4	9405	25,000/-
BVP122 LED 135 CW HE SY20° FG XTFCL S4	9405	25,000/-
BVP122 LED 135 CW HE NB FG XTFCL S4	9405	25,000/-
BVP122 LED 142 CW HE AK55° FG XTFCL S4	9405	28,000/-
BVP122 LED 150 CW HE SY20° FG XTFCL S4	9405	28,000/-
BVP122 LED 150 CW HE NB FG XTFCL S4	9405	28,000/-



TempoLED

TempoLED is a flood lighting luminaire with high power LED and unique flood optics to ensure uniform distribution and savings up to 50%* w.r.t conventional system and maintenance free system ideal for area lighting, high mast and billboard.



Type	HSN Code	MRP (INR)
BVP410 LED 170 CW HE NB FG S4 XTFCL	9405	21,000/-
BVP410 LED 170 CW HE SY20 FG S4 XTFCL	9405	25,000/-
BVP410 LED 170 CW HE AK55 FG S4 XTFCL	9405	25,000/-
BVP410 LED 215 CW HE NB FG S4 XTFCL	9405	25,000/-
BVP410 LED 225 CW HE SY20 FG S4 XTFCL	9405	30,000/-
BVP410 LED 222 CW HE AK55 FG S4 XTFCL	9405	30,000/-
BVP410 LED 250 CW HE NB FG S4 XTFCL	9405	30,000/-
BVP410 LED 263 CW HE SY20 FG S4 XTFCL	9405	35,000/-
BVP410 LED 260 CW HE AK55 FG S4 XTFCL	9405	35,000/-

Tango G3

Tango G3 is a flood lighting luminaire with integrated flood optics with choice of optics to ensure uniform distribution and savings up to 50%* w.r.t conventional system and maintenance free system, ideal for sports lighting, area lighting and high mast lighting.



Type	HSN Code	MRP (INR)
BVP383 LED360/CW 320W 220-240V NB IN	9405	50,000/-
BVP383 LED360/CW 320W 220-240V SWB IN	9405	50,000/-
BVP383 LED360/CW 320W 220-240V AWB IN	9405	50,000/-
BVP383 LED405/CW 360W 220-240V NB IN	9405	54,000/-
BVP383 LED405/CW 360W 220-240V SWB IN	9405	54,000/-
BVP383 LED405/CW 360W 220-240V AWB IN	9405	54,000/-
BVP383 LED450/CW 400W 220-240V NB IN	9405	57,000/-
BVP383 LED450/CW 400W 220-240V SWB IN	9405	57,000/-
BVP383 LED450/CW 400W 220-240V AWB IN	9405	57,000/-

Warm white version available on request.

Sportsstar

Sportsstar is an innovative LED flood lighting luminaire with choice of special designed optics having lumen package 50Klm to 100Klm for special applications like sports and area lighting and maintenance free system.



Type	HSN Code	MRP (INR)
BVP621 LED672/CW 640W 220-240V AWB GM	9405	2,00,000/-
BVP621 LED840/CW 800W 220-240V NB GM	9405	2,50,000/-
BVP621 LED840/CW 800W 220-240V AWB GM	9405	2,50,000/-
BVP621 LED1008/CW 960W 220-240V NB GM	9405	3,00,000/-
BVP621 LED1008/CW 960W 220-240V AWB GM	9405	3,00,000/-

Warm white version available on request.

Landscape Lighting

LED Post Top

Reliable and aesthetic designed IP65 post top lantern with symmetric light distribution and limited upward light component.



Type	HSN Code	MRP (INR)
BGP161 LED2500/NW PSU 220-240V 7043 IN	9405	20,000/-
BGP161 LED2300/WW PSU 220-240V 7043 IN	9405	20,000/-

CityCube Post Top LX

CityCube is a contemporary and sleek design IP66/IK08 Post top lantern with options of flat and drop diffuser for street light and area light distribution.



Type	HSN Code	MRP (INR)
BGP400 LED25 L CW PC S1	9405	37,500/-
BGP400 LED50 L CW PC S1	9405	43,000/-
BGP400 LED35 L CW MR FG S1	9405	37,500/-
BGP400 LED70 L CW MR FG S1	9405	43,000/-
BGP400 LED25 Y CW PC S1	9405	43,000/-
BGP400 LED50 Y CW PC S1	9405	48,000/-

CityCube Bollard U

CityCube Bollard is a robustly designed IP65/IK10 bollard and is easy to install with base plate.



Type	HSN Code	MRP (INR)
BCP400 LED04 U CW PSU GR S1	9405	10,000/-



CityCube Bollard P

CityCube Bollard is a robustly designed IP65/IK10 bollard and is easy to install with base plate.



Type	HSN Code	MRP (INR)
BCP400 LED05 P CW PSU GR S1	9405	11,500/-

CityCube Wall Mount Horizontal/Vertical

CityCube wall mount is a contemporary and sleek design IP65/IK10 wall mount with symmetric light distribution.



Type	HSN Code	MRP (INR)
BWS400 LED05 H CW PSU GR S1	9405	6,000/-
BWS400 LED05 V CW PSU GR S1	9405	6,000/-

CityCube Bollard T

CityCube Bollard is a robustly designed IP65/IK10 bollard and is easy to install with base plate.



Type	HSN Code	MRP (INR)
BCP400 LED09 T CW PSU GR S1	9405	17,000/-

CityCube Bollard D

CityCube Bollard is a robustly designed IP65/IK10 bollard and is easy to install with base plate.



Type	HSN Code	MRP (INR)
BCP400 LED09 D CW PSU GR S1	9405	11,500/-

LED Bollard


Robustly designed IP65/IK10 bollard and is easy to install with base plate.



Type	HSN Code	MRP (INR)
BCP150 LED150/WW PSU 220-240V 7043	9405	11,500/-
BCP151 LED150/WW PSU 220-240V 7043	9405	12,000/-
BCP150 LED150/NW PSU 220-240V 7043	9405	11,500/-
BCP151 LED150/NW PSU 220-240V 7043	9405	12,000/-

LED Step Light

Robust design LED step-light is IP67/IK10, easy to install, maintain and comes with suitable mounting box.




Type	HSN Code	MRP (INR)
BWG150 LED50/WW PSU 220-240V IP67 7043	9405	7,000/-
BWG150 LED50/NW PSU 220-240V IP67 7043	9405	7,000/-

LED Marker

Robust design LED marker is IP67/IK10, easy to install, maintain and comes with suitable mounting box.



Type	HSN Code	MRP (INR)
BBG 150 LED50/WW PSU 220-240V IP67	9405	6,000/-
BBG150 LED50/NW PSU 220-240V IP67	9405	6,000/-
BBG151 LED50/WW PSU 220-240V IP67	9405	6,000/-
BBG151 LED50/NW PSU 220-240V IP67	9405	6,000/-

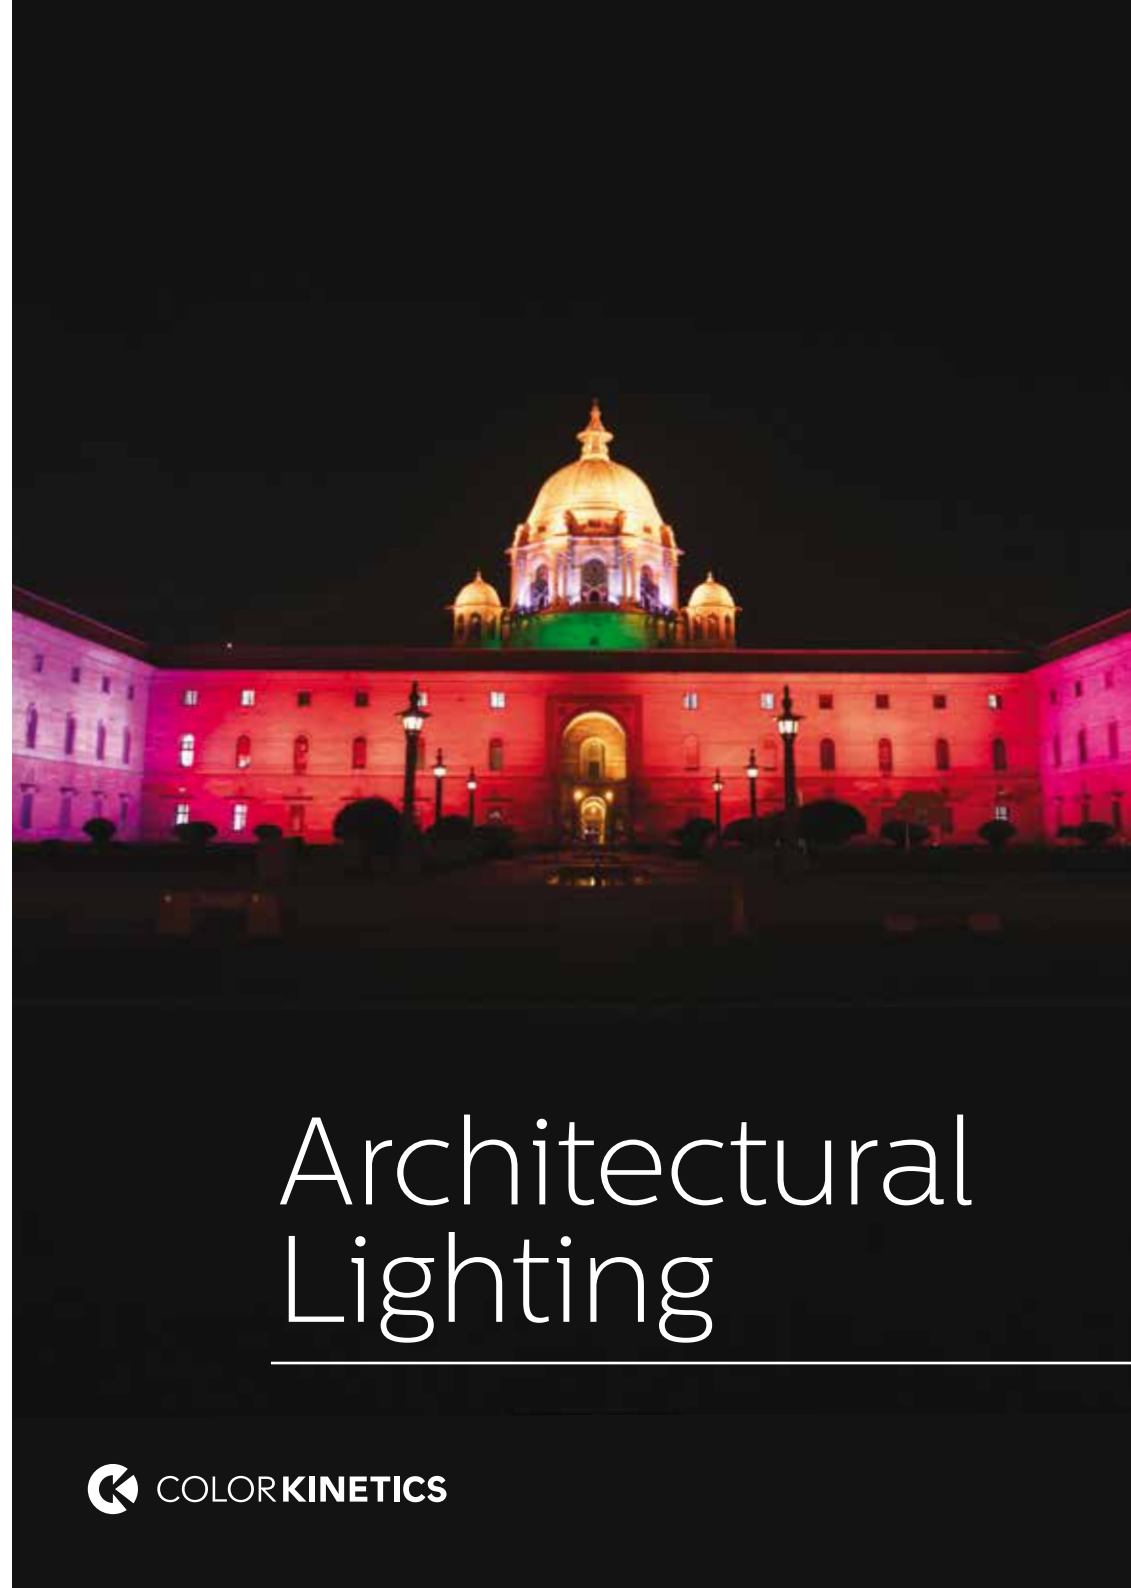

Architectural Lighting



Cove

Cove luminaires are ideal for accent and aesthetic effect lighting to add drama and interest in brightly lit environments, such as retail spaces, nightclubs, lobbies, atriums and other locations.



Type	MRP (INR)
iColor Cove QLX Powercare, 12IN, 100-277V, wide beam, UL/CE/CCC	On request
iColor Cove QLX Powercare, 12IN, 100-277V, medium beam, UL/CE/CCC	On request
EW Cove QLX Powercare, 48 IN, 220-240V, 3000K, 19W, wide beam, TP1, CE/CCC	On request
EW Cove QLX Powercare, 48 IN, 220-240V, 4000K, 19W, wide beam, TP1, CE/CCC	On request
EW Cove QLX Powercare, 48 IN, 220-240V, 3000K, 19W, medium BEAM, TP1, CE/CCC	On request
EW Cove QLX Powercare, 48 IN, 220-240V, 4000K, 19W, medium beam, TP1, CE/CCC	On request

Even Balance

EvenBalance Essential White Powercore is a compact interior linear luminaire family that is ideal for washing and grazing applications.



Type	HSN Code	MRP (INR)
Evenbalance EW Wall Grazing Powercore, 2700K, 1ft, UL/CE/CCC	-	On request
Evenbalance EW Wall Grazing Powercore, 4000K, 1ft, UL/CE/CCC	-	On request
Evenbalance EW Wall Grazing Powercore, 2700K, 4ft, UL/CE/CCC	-	On request
Evenbalance EW Wall Grazing Powercore, 4000K, 4ft, UL/CE/CCC	-	On request

iColor MR Lamp

iColor MR Gen3 is an intelligent color-changing lamp that delivers intense, saturated bursts of color and color-changing effects. The stylish housing fits into most standard MR16 luminaires, including tracks, cables, rails, and pendants.



Type	HSN Code	MRP (INR)
iColor MR G3, 17 Degree	-	On request
iColor MR G3, 30 Degree	-	On request
iColor MR G3, 90 Degree	-	On request

Purestyle

Perfect for cove, wall-washing, backlighting and other indoor applications. PureStyle combines high output and professional-grade color mixing with the proven efficiency and cost-effectiveness of Powercore technology.



Type	HSN Code	MRP (INR)
Purestyle, Intellihue, Wide, 1ft	-	On request
Purestyle, Intellihue, Narrow, 1ft	-	On request
Purestyle, Intellihue, Wide, 4ft	-	On request
Purestyle, Intellihue, Narrow, 4ft	-	On request

Graze

This high-performance linear exterior wall grazing family of luminaires offers high-quality light in a wide range of luminaire lengths, beam angles, output levels, and power consumption levels.



Type	MRP (INR)
Colorgraze Intellihue Powercore, 1Ft, 9 Degree	On request
Colorgraze Intellihue Powercore, 4Ft, 9 Degree	On request



Burst & Burst Compact

This family of high-output, exterior-rated LED lighting luminaires is designed for accent and site lighting. Most versions feature multiple housing colors and standard architectural and landscape formats.



Type	MRP (INR)
Colorburst Intellihue Powercore, Black Housing, Architectural Mount	On request
Colorburst Intellihue Powercore, White Housing, Architectural Mount	On request
Colorburst Powercore, 4.5 inch, Black Housing, 100-240V, UL/Ce, Architectural Mount	On request
Colorburst Powercore, 4.5 inch, White Housing, 100-240V, UL/Ce, Architectural Mount	On request

Blast

This high-performance line of exterior luminaires offers an extremely wide range of light output, beam angles, and accessories.



Type	MRP (INR)
Intellihue Blast Gen4 Powercore, Clear Lens, White Housing, UL/Ce	On request
Intellihue Blast Gen4 Powercore, Clear Lens, Black Housing, UL/Ce	On request

CSplash

Submersible LED spotlight with intelligent color light.



Type	MRP (INR)
BColor, CSplash 2 XRE LED	On request
BColor, CSplash 2, Clear Lens XRE LED	On request

Reach & Reach Compact

Reach Powercore is ideal for illuminating large surfaces. Flood luminaires can throw fully-saturated light to great heights.



Type	MRP (INR)
Colorreach Powercore, GEN2, 100-277V, UL/CE	On request
Colorreach Powercore, GEN2, RGBW, 100-277V, UL/CE	On request
Colorreach Compact Powercore, 100-277V, UL/CE	On request
Colorreach Compact Powercore, RGBW, 100-277V, UL/CE	On request

Archipoint

ArchiPoint iColor Powercore is a daylight-visible, exterior-rated LED point of light ideally suited for a range of direct-view and beacon applications.



Type	MRP (INR)
Archipoint Icolor Powercore, Translucent Dome Lens, 100-240V, UL/CE	On request
Archipoint Icolor Powercore, Clear Flat Lens, 100-240V, UL/CE	On request



Color Kinetics is a fully stand-alone global brand of Signify



Controllers / Power Supplies / Keypads / Softwares

Type	MRP (INR)
Controller, VSM Pro SSD, DVI	On request
Controller, VSM Pro SSD, Composite	On request
Colorburst Intellihue Powercore, Black Housing, Architectural Mount	On request
Controller, Light System Manager (Gen 5) 15000 Node	On request
Controller, Iplayer 3/Colorplay 3, EU Cable	On request
Controller, Iplayer3 Serial Keypad, White	On request
Controller, Iplayer3 Aux Box, Universal Power	On request
Colordial Pro	On request
Ethernet Switch with POE Ports For Use with Colordial2	On request
Power Over Ethernet Injector W/ EU Line Cord	On request
Controller, iColor Communication Module	On request
Ethernet Switch with POE Ports for use with Colordial2	On request
Controller, iColor Keypad, White	On request
Power over ethernet injector W/ EU line cord	On request
Icolor Player	On request
Colorburst Intellihue Powercore, White Housing, Architectural Mount	On request
Icolor Accent Compact, RGB, Ethernet, 1.2M (4ft), Clear Flat Lens	On request

Accent Compact

This family of direct view linear LED luminaires is ideally suited for displaying large-scale video, graphics, and intricately designed effects.



Type	MRP (INR)
iColor Accent Compact, RGB, Ethernet, 1.2M (4ft), Translucent Lens	On request
iColor Accent Compact, RGB, Ethernet, 1.2M (4ft), Clear Flat Lens	On request

Terms & Conditions

- Please choose correct system configuration. (Only Philips Employees / Authorised Value Added Partners & System Integrators should be consulted).
- GST Extra as applicable in case of discounts considered on MRP.
- Warranty 1 year against manufacturing defects.
- Installation, Testing & Commissioning Extra as applicable.
- AMC available on request.
- The company reserves the right to discontinue / add new variants in the product range.





Solar Lighting



Sunstay

Sunstay is the highest ever Lumen efficacy of more than 175 lm/Watt having highly safe & advanced long life maintenance free Lithium Ferro Phosphate (LiFePO₄) battery used for hassle free operations & highly efficient Microcontroller based integrated MPPT charge controller with driver. The luminaire provides 2 days battery backup with factory setting dimming profile & PIR sensor.



Type	HSN Code	MRP (INR)
BRP710 LED20 CW MR S1 12V LFP AIO Solar Equip	94055040	On request
BRP710 LED20 CW MR S1 12V LFP AIO Solar Equip IN	94055040	On request
BRP710 LED 30 CW MR S1 12V LFP AIO Solar Equip	94055040	On request
BRP710 LED 30 CW MR S1 12V LFP AIO Solar Equip IN	94055040	On request
BRP710 LED20 CW MR S1 12V 28PO PDIM50 Solar Equip IN	94055040	On request
BRP710 LED20 CW MR S1 12V 35MO PDIM50 Solar Equip IN	94055040	On request
BRP710 LED20 CW MR S1 12V 35MO FDIM50 Solar Equip IN	94055040	On request
BRP710 LED20 CW MR S1 12V 35MO Solar Equip IN	94055040	On request
BRP710 LED20 CW MR S1 12V 28PO PDIM50 Solar Equip	94055040	On request
BRP710 LED20 CW MR S1 12V 35MO PDIM50 Solar Equip	94055040	On request
BRP710 LED20 CW MR S1 12V 35MO FDIM50 Solar Equip	94055040	On request
BRP710 LED20 CW MR S1 12V 35MO Solar Equip	94055040	On request

Standalone Solar LED Street Lighting System

Solar powered outdoor lighting products are ideal for lighting the area in remote location where the electricity is unavailable or erratic. Even in urban areas, these find great usage to reduce dependency on conventional power and contribute towards green energy. Reliable and long life makes this solution effective in fulfilling our present and future lighting requirements.



Type	HSN Code	MRP (INR)
7W Solar LED street lighting system	94055040	On request
12W Solar LED street lighting system	94055040	On request
15W Solar LED street lighting system	94055040	On request
17W Solar LED street lighting system	94055040	On request
19W Solar LED street lighting system	94055040	On request
21W Solar LED street lighting system	94055040	On request
30W Solar LED street lighting system	94055040	On request
36W Solar LED street lighting system	94055040	On request
45W Solar LED street lighting system	94055040	On request
51W Solar LED street lighting system	94055040	On request
68W Solar LED street lighting system	94055040	On request
78W Solar LED street lighting system	94055040	On request
88W Solar LED street lighting system	94055040	On request
100W Solar LED street lighting system	94055040	On request

* Actual product image may vary depending on the luminaire type / wattages.

LifeLight


A superior portable solar lamp with separate PV module. The handle with 360 degree rotation provides sturdy grip with flexibility for various applications such as hanging it upside down which makes it convenient to angle light and to hook on the ceiling.




Type	HSN Code	MRP (INR)
Solar Lamp Life Light-WC	94055040	On request
Solar Lamp Life Light	94055040	On request

OccuSwitch

Occuswitch is a movement detector with a build-in switch. It will switch off the lights in a room or area when it is vacated and thus save energy. It can switch any load up to 6 A and control an office area of around 20 Sqm for small movement (e.g. desk work) and around 50Sqm for large movement (e.g. walking). Its smart daylight sensing technology offers additional saving through daylight override and daylight switching.

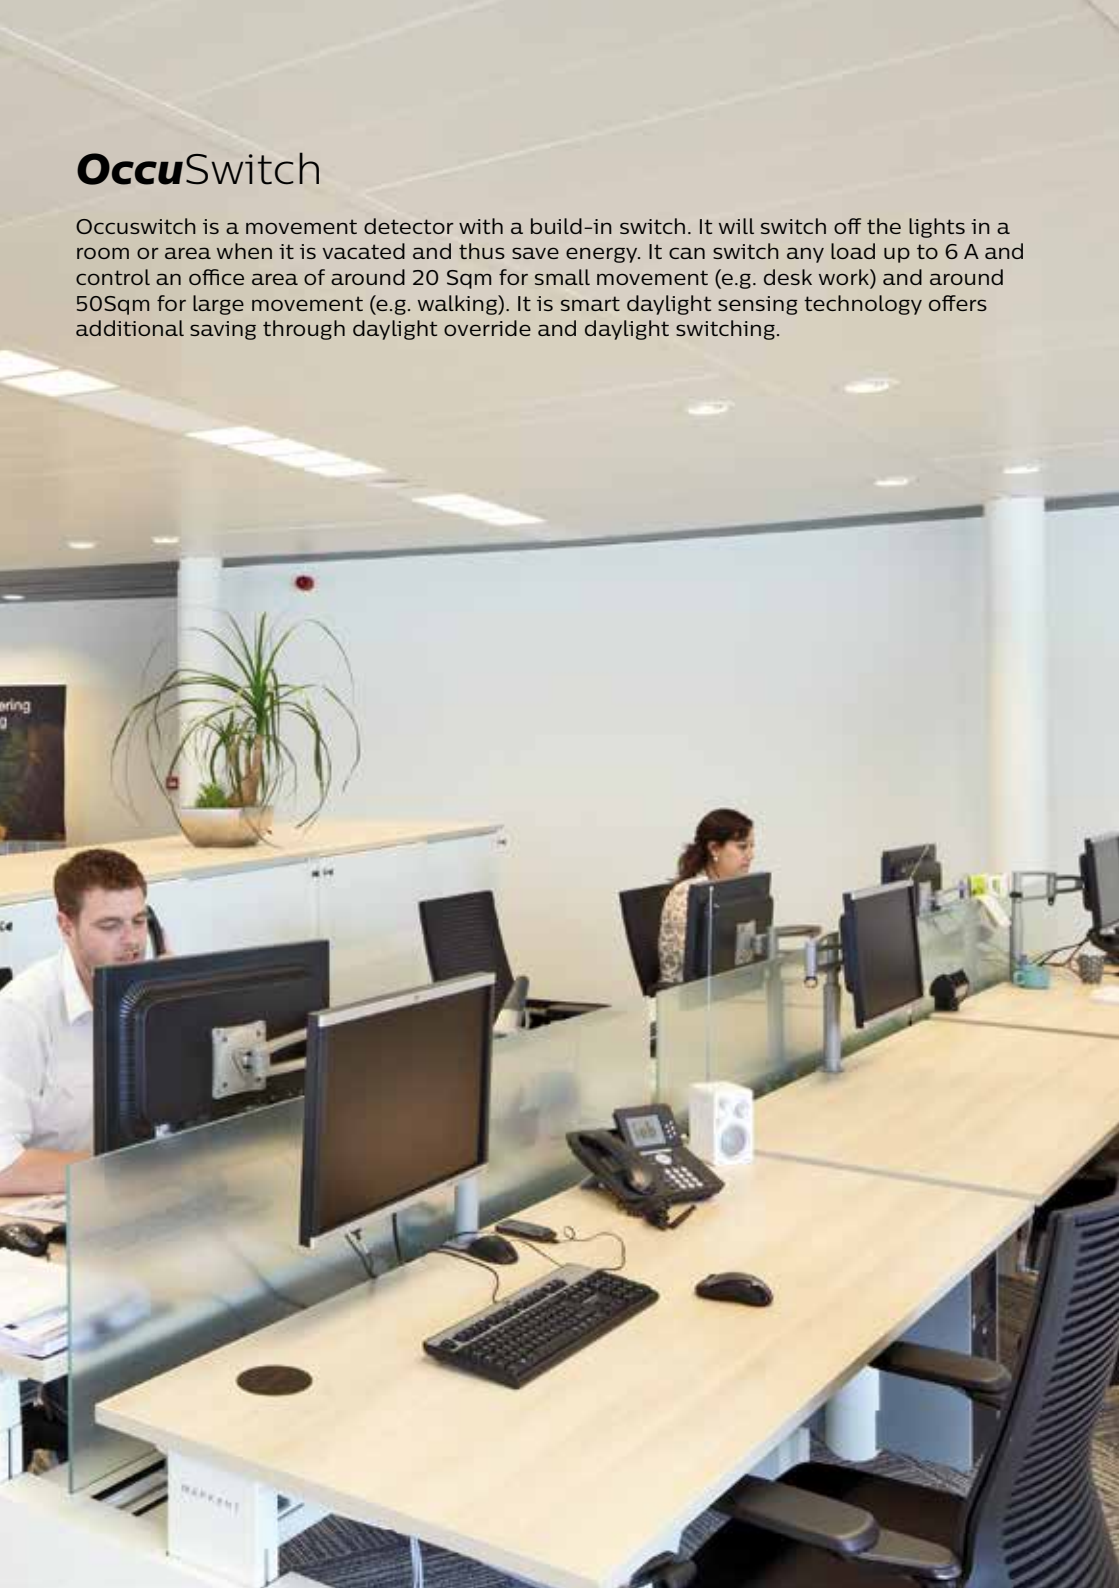

Daylight sensing

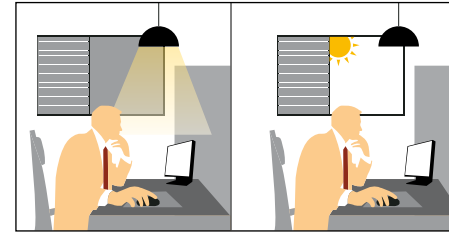

Occupancy sensing



Benefits



Plug and play



Smart savings



High quality

Standalone Controls

Lighting automation controls and sensors



Type	MRP (INR)
LRM1071/10 - OccuSwitch Movement Detector	3,650/-

VERSACE

VERSACE

LED Lamp



Philips TrueForce LED Road

Philips TrueForce LED Road is the world's first direct (Plug&Play) replacement SON-T LED lamp for street lighting, making it easy to upgrade existing installations to LED without a need to rewire or change a luminaire. It is the simplest way to start saving on energy consumption and improve light quality, while keeping your initial investment low.



Type	HSN Code	MRP (INR)
TForce LED Road 58-35W E27 730	9290	On request
TForce LED Road 60-35W E27 740	9290	On request

Philips TrueForce LED Industrial and Retail Highbay Retrofit lamps

Philips TrueForce LED Industrial and Retail (Highbay – HPI/SON/HPL) lamps give you a quick and easy payback solution to replace HID lamps in Highbay application. The solution gives you the LED benefits of energy-efficiency and long-lifetime, plus they come for a low initial investment. Lamp design allows retrofit HID lamps with TrueForce LED lamps with no gear loss and high power factor. Multiple beam angle options and high color rendering index enhance the lighting distribution while creating a comfortable, safe and high productivity environment.



Type	HSN Code	MRP (INR)
TForce HB 100-85W E40 840 120D	-	7000/-
TForce HB 100-85W E40 865 120D	-	7000/-

Type	HSN Code	MRP (INR)
TForce HB 200-160W E40 840 NB	-	9,999/-
TForce HB 200-160W E40 840 WB	-	9,999/-
TForce HB 200-160W E40 865 NB	-	9,999/-
TForce HB 200-160W E40 865 WB	-	9,999/-

Philips TrueForce Core LED Industry and Retail (Highbay– HPI/SON/HPL) lamps

Philips TrueForce Core LED Industry and Retail (Highbay– HPI/SON/HPL) lamps give you a quick and easy payback solution to replace HID/CFLi lamps in industrial application. The solution gives you the LED benefits of energy-efficiency and long-lifetime, plus they come for a low initial investment. Lamp design allows to replace HID/CFLi lamps with no gear loss and high power factor.



Type	HSN Code	MRP (INR)
TForce Core HB 26-30W E27 830	-	On request
TForce Core 27W/3000lm B22	-	799/-
TForce Core 27W/3000lm E27	-	799/-
TForce Core HB 28-30W E27 840	-	On request
TForce Core 37W/4000lm B22	-	1,099/-
TForce Core 37W/4000lm E27	-	1,099/-
TForce Core HB 40-40W E27 840	-	On request
TForce Core HB 40-40W E27 865	-	On request
TForce Core 47W/5000lm B22	-	1,399/-
TForce Core 47W/5000lm E27	-	1,399/-
TForce Core HB 48-50W E27 830	-	On request
TForce Core HB 50-50W E27 840	-	On request
TForce Core HB 50-50W E27 865	-	On request
TForce Core HB 48-50W E40 830	-	On request
TForce Core HB 50-50W E40 840	-	On request
TForce Core HB 50-50W E40 865	-	On request
TForce Core HB 70-65W E40 840	-	On request
TForce Core HB 70-65W E40 865	-	On request
TForce Core HB 90-80W E40 840	-	On request
TForce Core HB 90-80W E40 865	-	On request

Accessories for Tforce Core LED HID range



Type	HSN Code	MRP (INR)
TForce E27 lamp holder	-	1,000/-
TForce E40 lamp holder	-	1,100/-
TForce 12inch lamp reflector	-	1,450/-
TForce 16inch lamp reflector	-	1,800/-

True Force Post Top Lamps

Philips TrueForce LED lamps provide an easy LED solution with a fast payback to replace High-Intensity Discharge (HID) lamps. These lamps bring the energy efficiency and long lifetime benefits of LED to HID replacement, with a low initial investment delivering instant savings. With the right lamp size and light distribution, customers can easily retrofit TrueForce LED lamps into their existing system, thereby enhancing the light quality without having to change the fixtures or sacrifice the light effect.



Type	HSN Code	MRP (INR)
TForce LED HPL ND 44-33W E27 740 FR	-	3,499/-
TForce LED HPL ND 48-33W E27 740 CL	-	3,499/-

LED PL-L 18W

Cost effective and easy way to move to LED without changing the 2'x2' conventional fittings.



Type	HSN Code	MRP (INR)
LED PL-L 18W, 6500K 2G11	-	599/-

Essential LED spots MR16/GU10 Lamps

Essential LEDspots MR16/GU10 are compatible with most existing fixtures with a GU5.3 socket and are designed as a retrofit replacement for halogen spots. Essential LEDspots MR16/ GU10 deliver significant energy savings and minimize initial investment.



Type	HSN Code	MRP (INR)
ESS LED MR16 4.5-50W 36D 830 100-240V	-	299/-
ESS LED MR16 4.5-50W 36D 865 100-240V	-	299/-
Essential LED 4.6-50W GU10 827 36D	-	299/-
Essential LED 4.6-50W GU10 830 36D	-	299/-
Essential LED 4.6-50W GU10 865 36D	-	299/-

MASTER LEDspot ExpertColor MV range

MASTER LEDspot MV ExpertColor creates a warm and comfortable ambience for hospitality venues, homes and restaurants. It creates ambience with superior lighting that has a customised spectrum, high CRI and deep dimming features. The result being a beautiful lighting experience. The innovative, trimless lens design will also suit almost any interior decor with its clean and neat look. In addition, you can take advantage of the full ExpertColor family, which also includes LEDspot LV and LEDspot Par lamps.



Type	HSN Code	MRP (INR)
MAS LED MR16 ExpertColor 7.2-50W 927 10D	-	1,699/-
MAS LED MR16 ExpertColor 7.2-50W 930 10D	-	1,699/-
MAS LED MR16 ExpertColor 7.2-50W 940 10D	-	1,699/-
MAS LED MR16 ExpertColor 7.2-50W 927 24D	-	1,699/-
MAS LED MR16 ExpertColor 7.2-50W 930 24D	-	1,699/-
MAS LED MR16 ExpertColor 7.2-50W 940 24D	-	1,699/-
MAS LED MR16 ExpertColor 7.2-50W 927 36D	-	1,699/-
MAS LED MR16 ExpertColor 7.2-50W 930 36D	-	1,699/-
MAS LED MR16 ExpertColor 7.2-50W 940 36D	-	1,699/-
MAS LED MR16 ExpertColor 7.2-50W 927 60D	-	1,699/-
MAS LED MR16 ExpertColor 7.2-50W 930 60D	-	1,699/-
MAS LED MR16 ExpertColor 7.2-50W 940 60D	-	1,699/-
MAS LED ExpertColor 5.5-50W GU10 927 24D	-	999/-
MAS LED ExpertColor 5.5-50W GU10 930 24D	-	999/-
MAS LED ExpertColor 5.5-50W GU10 927 36D	-	999/-
MAS LED ExpertColor 5.5-50W GU10 930 36D	-	999/-

LED GU10 Kits

LED GU10 KITS are a perfect for spot lighting and deliver warm halogen-like light



Type	HSN Code	MRP (INR)
LED 50W GU10Kit_R 827 36D	-	470/-
LED 50W GU10Kit_R 840 36D	-	470/-
LED 50W GU10Kit_R 865 36D	-	470/-
LED 50W GU10Kit_S 827 36D	-	470/-
LED 50W GU10Kit_S 840 36D	-	470/-
LED 50W GU10Kit_S 865 36D	-	470/-

Essential LED spots MR16/GU10 Lamps

Essential LEDspots MR16/GU10 are compatible with most existing fixtures with a GU5.3 socket and are designed as a retrofit replacement for halogen spots. Essential LEDspots MR16/ GU10 deliver significant energy savings and minimise initial investment.



Type	HSN Code	MRP (INR)
ESS LED MR16 4.5-50W 36D 830 100-240V	-	299/-
ESS LED MR16 4.5-50W 36D 865 100-240V	-	299/-
Essential LED 4.6-50W GU10 827 36D	-	299/-
Essential LED 4.6-50W GU10 830 36D	-	299/-
Essential LED 4.6-50W GU10 865 36D	-	299/-

MASTER LEDspot LV (Dimmable & Non Dimmable)

Delivering intense accent beam, MASTER LEDspot LV is an ideal retrofit solution for spot lighting. MASTER LEDspot LV is designed to replace halogen or incandescent spots. It realises natural colors, enables cozy and comfortable ambience for residential, hospitality and emphasises the beauty of merchandise in retail. New smaller housing provides perfect fitting with majority of luminaires in a market with a MR16 GU 5.3 holder. It not only employs Philips' patented solution to guarantee the broadest possible compatibility with standard 12V halogen electronic transformers, it also delivers high beam intensity which is equivalent to halogen MR16 spots. The dimming function enables to create the desired atmosphere and it works with broad selection of dimmers. Its high SDCM ensures stricter color consistency, that is maintained over product life. MASTER LEDspot LV delivers huge energy savings and minimises maintenance cost without any compromise on light quality and lifetime, enabling residential and business owners to achieve a return on their investment within short period time.



Type	HSN Code	MRP (INR)
MASTER LED 7-50W 927/930/940 MR16 15D/24D/36D Dim	-	1,379/-
MASTER LED 8-50W+ 827/830 MR16 24D/36D Dim	-	1,499/-
MASTER LED 4-35W 2700/3000K MR16 24D/36D	-	399/-
MASTER LED 5.5-50W 2700/3000/4000K MR16 24D/36D	-	499/-
MASTER LED 6.5-50W 927/930/940 MR16 24D/36D	-	799/-
Master LED 5-50W GU10 927/930/940 36D Dim	-	599/-

MAS LEDspot LV AR111

With its new perfect-fit design, the Master LEDspot LV AR111 now works with most of G53 luminaires as a true retrofit solution. The lamp creates a brilliant visual effect for retail and hospitality applications such as shops, showrooms and galleries. The high quality light brings out the true colors in merchandise and emphasises its beauty. It also lasts long, with a strong lumen and color maintenance. The beautifully designed lamp offers a well-defined beam with a multitude of beam angles to suit various applications. Not only does it employ the Philips patented solution to ensure it is compatible with a broad selection of standard 12V halogen electronic transformers, it also delivers high beam intensity which is equivalent to halogen AR111 spots of 50W, 75W or 100W.



Type	HSN Code	MRP (INR)
MAS LEDspotLV D 11-50W 927/930 AR111 8D/24D/40D	-	1,999/-
MAS LEDspotLV D 15-50W 927/930 AR111 8D/24D/40D	-	2,499/-
MAS LEDspotLV D 20-50W 927/930/940 AR111 8D/24D/40D	-	2,999/-

Master LED PAR30L

Philips PAR30S LED Single Optic Lamps with AirFlux Technology provides superior lighting aesthetics and optimal thermal efficiency in a sleek, lightweight design.



Type	HSN Code	MRP (INR)
Master LED PAR30L 20W 15D/30D 830/840	-	1,299/-
Master LED PAR30L 32W 15D/30D 830/840/857	-	1,999/-
Master LED PAR30L 40W 15D/30D 827/830/840/857	-	1,999/-



LEDtube range

LED tube range integrates LED light source with frosted cover design into traditional linear fluorescent form delivering 50%* energy saving.



Essential LEDtube Range	HSN Code	MRP (INR)
Essential InstantFit 18W 2100lm, T8, 6500k (Glass casing, Direct Retrofit on Electronic ballast / DIY)	8539	400/-
Essential LEDtube 1200mm 20W865 T8 IND I - 2100lm	8539	400/-

Master LEDtube Range	HSN Code	MRP (INR)
MAS LEDtube 1200mm 18W865 T8 I - 2100lm	8539	800/-
MAS LEDtube 18W, 865 T8 I - 1800lm	8539	700/-
MAS LEDtube 1200mm 13W865 T8 I IN30 - 1600lm	8539	700/-
Mas LedTube 30W, 4000lm, 865 T8	-	1,300/-
Mas LedTube 30W, 4000lm, 865 T8 with Batten	-	1,500/-

Sensor LEDtube

LEDtube with microwave based Sensor Chip. Detection Range - 5m radius @ 2.5m ht



Retrofit LED tube range	HSN Code	MRP (INR)
Sensor LEDtube 1200mm 1600lm 14W840	-	2,250/-
Sensor LEDtube 1200mm 1600lm 14W860	-	2,250/-

MasterConnect LEDtube

Philips MasterConnect LEDtube EM/Mains T8 means easy upgrade to a connected lighting system. Its 2.4GHz mesh networking technology enables wireless integration with a variety of control devices, such as sensor and switch. The result? Even more energy saving and enhanced flexibility in your space. Through dimming, occupancy sensing and/or daylight harvesting, lamps deliver up to 85% energy saving thanks to MasterConnect technology.



Master LEDtube Range	HSN Code	MRP (INR)
MAScon LEDtube IA 1200mm UO 16.5W830 T8 - 2300 lm	-	3,700/-
MAScon LEDtube IA 1200mm UO 16.5W840 T8 - 2300 lm	-	3,700/-
MAScon LEDtube IA 1200mm UO 16.5W865 T8 - 2300 lm	-	3,700/-



Connected



3000/4000/6500



50,000 hours



Wireless Dimmable



Beam angle



Rotatable (ROT)



CRI



G13 cap

Abbreviation

1. Product family code

SP780P | RC380B | DN295B | RS271B
ST391T | BY325P | BN308C | BRP409
| BVP621 | BGP400 | BRP710

2. System output

LED100S: 10,000 Lumen
LED130S: 13,000 Lumen
LED160S: 16,000 Lumen

3. Color temperature

CW/CDL: 6500K/5700K
NW:4000K
WW:3000K

4. Optics (Indoor)

NB: Narrow Beam 60°
WB: Wide beam 110°
SK: Symmetric beam
AK: Asymmetric beam

5. Optics (Outdoor Product)

MR: Optics for Main Road
NR: Optics for Narrow Road
SLA: Street Light Optics A Class
SLC: Street Light Optics C Class
SWB: Symmetric Wide Beam
AWB: Asymmetric Wide Beam
NB: Narrow Beam
SY20: Symmetric beam 20 Degree
AK: Asymmetric Beam

6. Optics (Retail)

NB: Narrow Beam
MB: Medium Beam
WB: Wide Beam

7. Controls

PSU: Fixed output
PSD: DALI Dimmable
PSR: 0-10 Analog Dimmable

8. Phase:

1C: Single Circuit
3C: Triple Circuit

9. Variant

V1: Version 1
V2: Version 2

10. Width (Appx. Dimension)

W6: 60mm Width
W7: 70mm Width
W30: 300mm width
W60: 600mm width

11. Length (Appx. Dimension):

L120: 1200mm length
L60: 600mm Length
L30: 300mm length
L1000: 1000mm length
L2000: 2000mm length

12. Front Cover

FG: Toughened Extra clear flat glass
PC: Polycarbonate cover
OD: Opal diffuser
OA: Opal Acrylic

13. Luminaire Color

SI: Silver color
GR: Grey color
WH: White color
BK: Black color



South

CHENNAI

Signify Innovations India Limited
3rd Floor, C-Block, Sunny Side, Shafee
Mohammed Road, Off Greams Road
Chennai - 600 006
Tel: 044 66074000/4020

BANGALORE

Signify Innovations India Limited
Mfar Greenheart, Level 7, Manyata Tech
Park, Hebbal Outer Ring Road,
Bangalore - 560045
Tel: 080 67819730

HYDERABAD

Signify Innovations India Limited
Level 1, MB Towers, Road No 10,
Banjara Hill, Hyderabad - 500034
Tel: 040 46464828

East

KOLKATA

Signify Innovations India Limited
22 Camac Street, Block B, 6th Floor
Kolkata - 700016
Tel: 033 66297000

West

MUMBAI

Signify Innovations India Limited
Boomerang, B2 Wing,
5th Floor, Unit No. 506,
Chandivali Farm Road,
Near Chandivali Studio,
Andheri (East), Mumbai - 400072
Tel: 91 22 6691 2000

AHEMDABAD

Signify Innovations India Limited
Flexi Business Hub
201, 2nd floor, Madhu complex,
Opposite Gwalia sweet,
Near sardar patel Stadium,
Navrangpura, Ahmedabad,
Gujarat - 380009
Tel: 9375239966

North

GURGAON

Signify Innovations India Limited
9th Floor, DLF - 9B, DLF Cyber City
DLF Phase 3, Gurgaon - 122002
Tel: 91 124 460 6000

For any lighting service request you can reach out through

TollFree Number: 1800 103 5977

SMS: Send 'COMP' to 56363 - Our representative will call back

Email: lighting.india@philips.com or

Chat & Mail: www.lighting.philips.co.in - Support/Contact us/Chatnow/Email



© 2019 Koninklijke Philips N.V. All rights reserved.
Reproduction in whole or in part is prohibited. Owing to continuous
innovation and improvement, Philips India reserves the right to make
changes in the data/details without prior notice. Care has been taken to
ensure that the information contained within is correct.