

# Freestanding STOVE PICARD

KOZA/PICARD

EAN:

5903950194209

PICARD is a steel freestanding stove with a rounded front which uniquely enhances the beautiful vision of fire. It is a great solution for people who are looking for a modern and ecological device.



Shipping on pallet

transfer - zł106.00

COD - zł111.00

Implementation within

14 days

## Technical Specifications

Rated output (kW)	9,0
Range of heating power (kW)	8.0 - 12.0
Efficiency (%)	80,0
Exhaust outlet diameter (mm)	150
Complies with Ecodesign criteria	Yes
Designed for heat recovery unit	Yes
Fuel type	recommended seasoned hardwood with moisture $\leq 20\%$
Weight (kg)	137,0
CO emission (at 13% O <sub>2</sub> ) $\leq$ given in %	0,10
Flue gas temperature (°C)	231,0
Max log length (cm)	25
Emission of dust (mg/Nm <sup>3</sup> )	37,0
Compliance with BlmSchV 2 standard	Yes
The energy efficiency index EEI	107,00
Glazing type	quadrant

Opening of the doors	to the left
Material	steel
Width (cm)	51,80
Height (cm)	126,10
Depth (cm)	52,20
External air inlet	Yes
The liner of the combustion chamber	Yes
Ashpan	Yes
Decorative printed glass	No
ASDP - automatic control of the air supply	No
Turbine TURBOFAN	No
Water panel	No

## Features

---

PICARD is a steel freestanding stove with a rounded front which uniquely enhances the beautiful vision of fire. It is a great solution for people who are looking for a modern and ecological device.

### MODERN DESIGN

Improved vision of the fire thanks to the curved glass.

The interior of the stove is lined with innovative material Acumotte which perfectly contrasts with the stove, giving it a modern design. Acumotte is a ceramic material which accumulates heat and raises the temperature in the furnace.

Solid handle sliding (click-on), makes it easy to seal the door. Due to this, the appliance is suitable for the homes with recuperation.

Under the combustion chamber there is an additional, closed chamber, in which the air inlet connection system is hidden. Opening the chamber door is based on an intuitive push to open system that does not require an additional handle.

### ECOLOGICAL COMBUSTION

The stove meets the criteria of **Ecodesign** and the restrictive **BImSchV 2** norm setting the maximum CO emission.

### MAXIMUM USE OF ENERGY

More efficient combustion and longer maintenance of temperature by lining the combustion chamber with ceramic material Acumotte which accumulates heat and raises the temperature in the furnace.

Full combustion on the dust thanks to deflector which extend the exhaust path. This process

increases the efficiency of burning and guarantees better energy use. It also minimizes the emission of harmful substances to the atmosphere. Additionally a diaphragm installed at the exhaust outlet functions similarly to the deflector, enhances the efficiency of the device.

Primary air is supplied to the insert thanks to the built-in 100 mm external air inlet. Air inlet is located from the bottom of the insert. Insert has a cover plate on the back wall and a hole in its base. Thanks to it the user can choose how to connect the external air kit. Air adjustment is done with a throttle adjustable by one regulator placed below the door. This solution prevents from improper usage. Whole mechanism works quietly and without fail.

Triple air system of combustion chamber: primary air - directed to the grate; secondary air supplied by the holes located in the back wall. Additionally, the system of air clean glass has been applied (curtain air).

### **SAFETY AT THE HIGHEST LEVEL**

The PICARD front is equipped with heat-resistant ceramics that withstand temperatures up to 800°C. The glass we propose is certified for quality and safety.

The body and front of the insert are resistant to high temperatures due to the use of high-grade steel. They also ensure the stability of the entire structure.

Excellent tightness of the device is ensured thanks to solid welds made in the noble gas shield. Steel elements are laser cut using modern devices and then bent on CNC bending machines.

### **COMFORTABLE USE**


The furnace can easily be kept clean thanks to the removable grate and container in which ash is collected.

The glazing stays clean thanks to the clean glass system used in it. The air curtain separates the glass from the firebox. Thanks to that it does not get dirty.

PICARD has the ability to mount exhaust outlet both from the top and the back of the unit, making it easy for installation (for back exhaust outlet installation purchase of top plate cover is required).

## **Technical drawing**

---

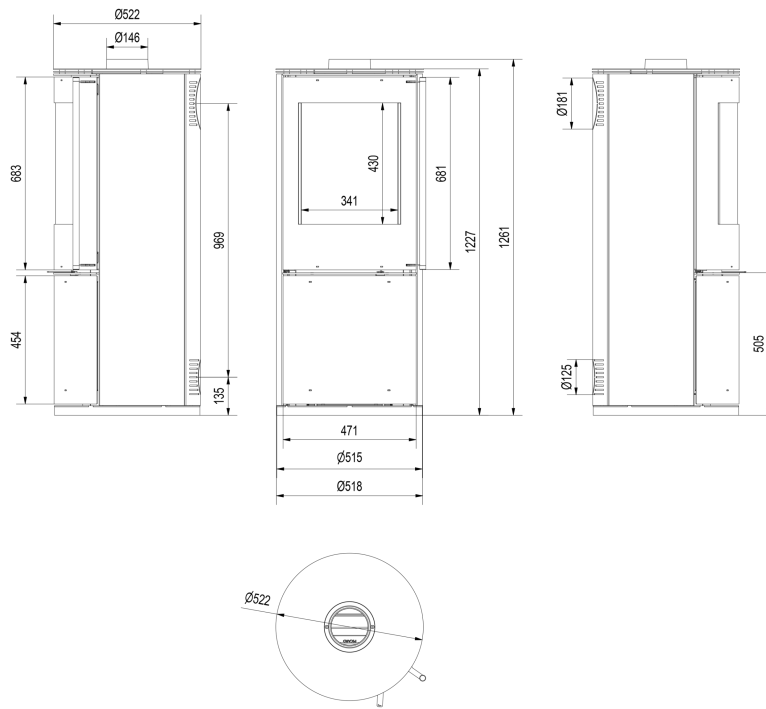


## Additional options

---



### Top plate cover for STOVE K5

Top plate cover for STOVE K5 is required for back exhaust outlet installation.



### Spring for door shutting MB, LUCY L/BS, NADIA L/BS, AQUARIO, STOVE AB S, STOVE AB S/2, ORBIT, FALCON, ANTARES

Spring for door shutting - automatically closes the door.



### Steel pipe 150/1m

Exhaust pipe designed for connecting wood-fired fireplace inserts an the existing flue pipes.



### Steel pipe 150/0.5m

Exhaust pipe designed for connecting wood-fired fireplace inserts an the existing flue pipes.



### Movable elbow 150/90

Adjustable elbow up to 90°, 3-segment, diameter: 150 mm.



### Damper Ø 150 black

The damper is designed to regulate the smoke draft.



### Steel rosette Ø 150

Rosette Ø 150, made of black sheet - a masking element.

## Warranty

---

Wszystkie produkty dostępne na [www.kratki.com](http://www.kratki.com) są fabrycznie nowe, wolne od wad fizycznych i prawnych oraz zostały legalnie wprowadzone na rynek polski. Producent udziela 5 lat gwarancji od momentu zakupu pieca na jego sprawne działanie. Wyłożenie ceramiczne objęte jest gwarancją na okres 2 lat od momentu zakupu wkładu. Ruszt i uszczelnienia pieca objęte są gwarancją na okres 1 roku od momentu zakupu wkładu. Gwarancją nie jest objęta: ceramika żaroodporna. Zastosowanie pieca wolnostojącego, sposób podłączenia do komina oraz warunki eksploatacji muszą być zgodne z instrukcją obsługi.

## Return

---

Klient będący Konsumentem, który zawarł Umowę sprzedaży, może w terminie 14 dni odstąpić od niej bez podawania przyczyny. Bieg terminu na odstąpienie od Umowy sprzedaży rozpoczyna się od chwili objęcia Towaru w posiadanie przez Klienta lub wskazaną przez niego osobę trzecią inną niż przewoźnik. Oświadczenie można złożyć na formularzu, którego wzór został zamieszczony przez Sprzedawcę na Stronie Internetowej Sklepu pod adresem: **formularz odstąpienia**.



**Kratki.pl Marek Bal**  
ul. W. Gombrowicza 4  
26-660 Wsola/Jedlińsk

**www.kratki.com**  
+48 48 338 44 88

Date of publication:  
06.06.2019