


Front View

minimum recommended height above finished floor level at 350mm

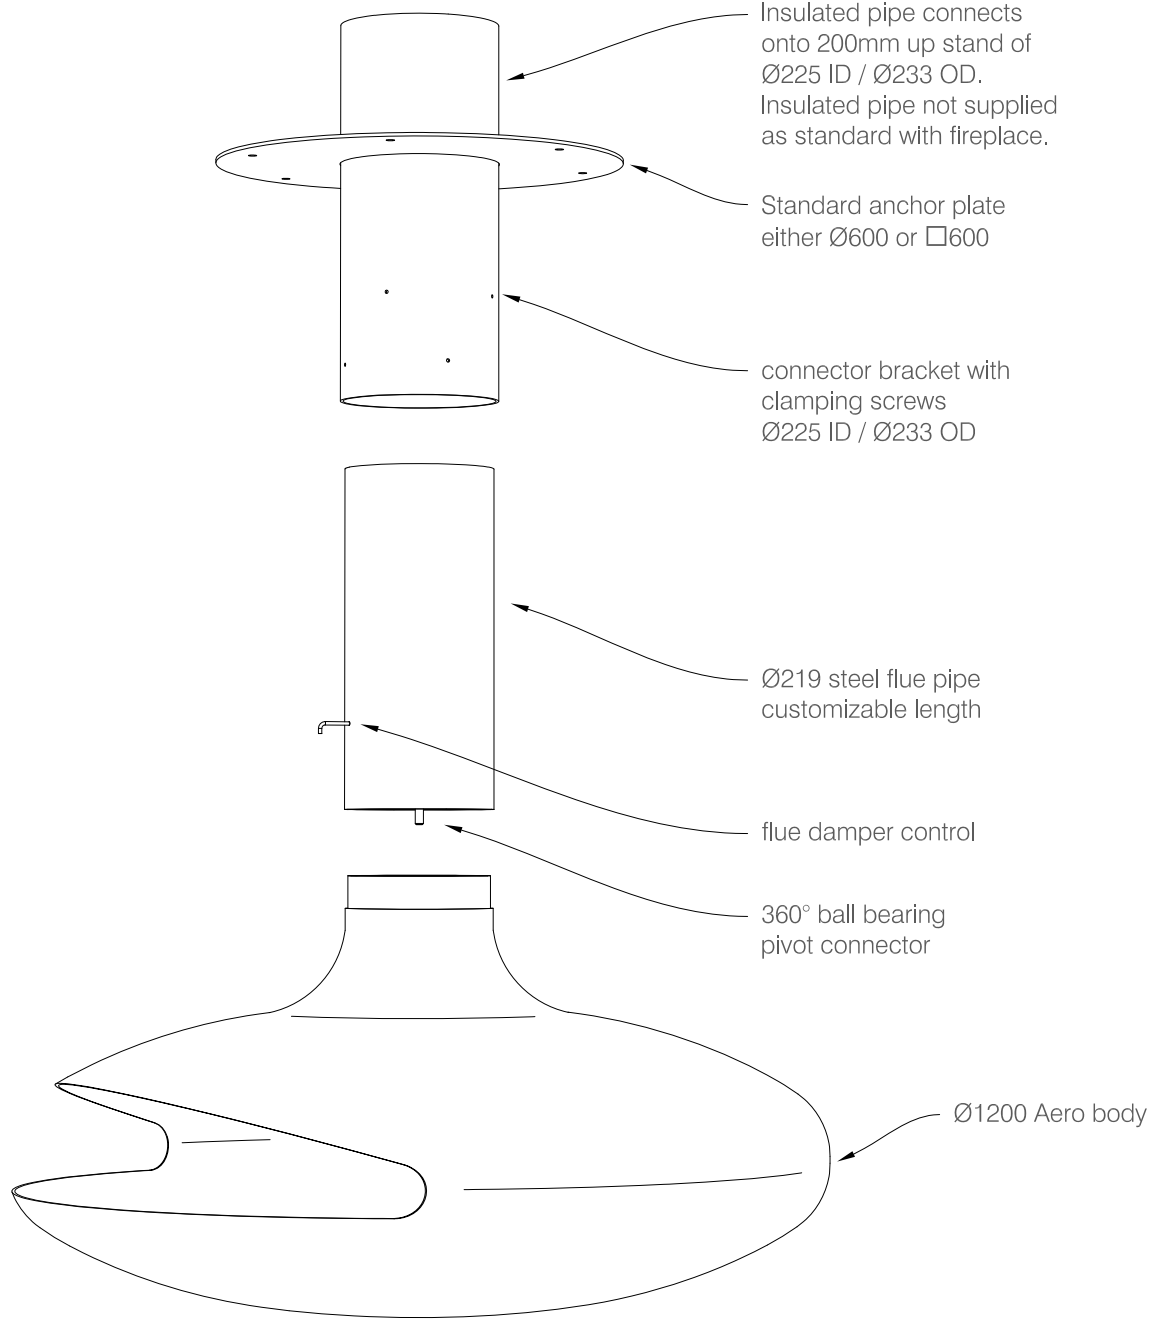

Insulated pipe connects onto 200mm up stand of Ø225 ID / Ø233 OD. Insulated pipe not supplied as standard with fireplace.

Standard anchor plate either Ø600 or □600

connector bracket with clamping screws Ø225 ID / Ø233 OD

Ø219 steel flue pipe customizable length

flue damper control

360° ball bearing pivot connector

Ø1200 Aero body

Aero Ø1200

© This drawing is copyright and remains the property of Signi Fires. It may not be retained, copied or used without written consent.