H5X® Element SST

Height: 28.5" Width: 7.4" Depth: 18.9" (72.4cm) (18.8cm) (48.0cm)



- LED display provides simple temperature adjustment
- Thinsulate® tank insulation provides increased energy efficiency
- Programmable "Energy Saver Mode" reduces operating cost during idle periods
- The perfect tool for added control over quality coffee and tea
- Contemporary, space-saving design
- Digital thermostat provides constant and accurate temperatures of 60°- 212°F (15.6°-100°C)

Agency:





Specifications

Product #: 43600.0003 Temp. Setting: 212°F (100.000°C)

Water Access: Plumbed Dispense: Pull & Hold

Finish: Stainless
Faucet: Upper

Additional Features

Electrical & Capacity

240	16.9	4050	Attached No	- I lug Type	236ml cups/hr	Temp. 60°F (15.5°C)	1 11030	plus Ground	60
Volts*	Amps	Watts	Cord	Plug Type	8oz cups/hr	Input H ² O	Phase	# Wires	Hertz

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements


PSI kPa		Fitting Supplied	Water Flow Required (GPM)				
20-90	138-621	1/4" Male Flare Fitting	-				


CAD Drawings


2D	Revit	KLC
•		


MARNING:







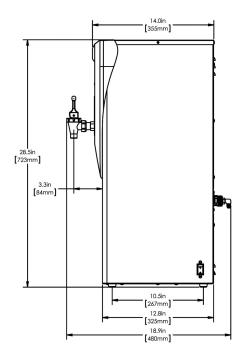



Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	28.5 in.	7.4 in.	18.9 in.	32.9 in.	11.0 in.	20.7 in.	32.000 lbs	4.338 ft ³
Metric	72.4 cm	18.8 cm	48.0 cm	83.7 cm	27.9 cm	52.5 cm	14.515 kgs	0.123 m³



Related Products & Accessories: H5X® Element SST(43600.0003)









Product #: 02497.0000

Product #: 02545.0000

PERFORATED Product #: 02546.0000

Product #: 02547.0000

Product #: 12599.0000

WALL BRKT KIT, FRONT MTG-H5 Product #: 13125.0003





















Serving & Holding Options: H5X® Element SST(43600.0003)

Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.

