

DISPENSERS

CBS-1230 Plus Brewers

DISPENSERS

D041

3.0 Liter Pump Lever Airpot



D063

3.8 Liter Pump Lever Airpot



FOR USE WITH 2.5" OPTIONAL LEGS

D451

4.0 Liter / 1 Gallon LUXUS® Thermal Server L4S-10



D482

4.0 Liter / 1 Gallon LUXUS® Sight Gauge Server LGS-10



SERVING STATION FOR THERMAL SERVERS

A147

Single Serving Station for L4S-10 & LGS-10 S4S-10-1



A148

Twin Serving Station for L4S-10 & LGS-10 S4S-10-2



A149

Triple Serving Station for L4S-10 & LGS-10 S4S-10-3



All dispensers and serving stations **SOLD SEPARATELY**.



BREW BASKET DESIGN

Advanced brew basket design provides a deeper bed depth and superior thermal insulation for better extraction.



CONTEMPORARY DESIGN

Traditional FETCO core with modern design enhancements fits well in any front-of-house or back of the house application.



ECO MODE

Reduces tank temperature during periods of non-operation.

DIMENSIONS

CBS-1231 Plus Brewer

DIMENSIONS

| | Height (A) | Width (B) | Depth (D) | Depth (E) | Faucet Clearance (F) | Brew Basket Clearance (G) |
|---|--------------------|--------------------|-------------------|--------------------|----------------------|---------------------------|
| Product Dimensions with 1" Standard Legs | 26.25" 66.67 cm | 11.75" 29.84 cm | 20.5" 52.07 cm | 15.13" 38.43 cm | 10.63" 26.98 cm | 13.13" 33.35 cm |
| Product Dimensions with 2.5" Optional Legs | 27.75" 70.48 cm | 11.75" 29.84 cm | 20.5" 52.07 cm | 15.13" 38.43 cm | 12.13" 30.80 cm | 14.63" 37.16 cm |
| Shipping Dimensions | 30.0" 76.20 cm | 17.0" 43.18 cm | 22.0" 55.88 cm | N/A | N/A | N/A |

WEIGHT

| | Empty [lbs] / [kg] | Filled [lbs] / [kg] |
|------------------------|--------------------|---------------------|
| Product Weight | 29 lbs 13.1 kg | 55 lbs 24.9 kg |
| Shipping Weight | 41 lbs 18.6 kg | N/A |

CBS-1232 Plus Brewer


DIMENSIONS

| | Height (A) | Width (C) | Depth (D) | Depth (E) | Faucet Clearance (F) | Brew Basket Clearance (G) |
|---|--------------------|--------------------|-------------------|--------------------|----------------------|---------------------------|
| Product Dimensions with 1" Standard Legs | 26.25" 66.67 cm | 19.75" 50.16 cm | 20.5" 52.07 cm | 15.13" 38.43 cm | 10.63" 26.98 cm | 13.13" 33.35 cm |
| Product Dimensions with 2.5" Optional Legs | 27.75" 70.48 cm | 19.75" 50.16 cm | 20.5" 52.07 cm | 15.13" 38.43 cm | 12.13" 30.80 cm | 14.63" 37.16 cm |
| Shipping Dimensions | 30.0" 76.20 cm | 23.0" 58.42 cm | 25.0" 63.50 cm | N/A | N/A | N/A |

WEIGHT

| | Empty [lbs] / [kg] | Filled [lbs] / [kg] |
|------------------------|--------------------|---------------------|
| Product Weight | 47 lbs 21.3 kg | 92 lbs 41.7 kg |
| Shipping Weight | 55 lbs 24.9 kg | N/A |

Shown with 1" standard legs.

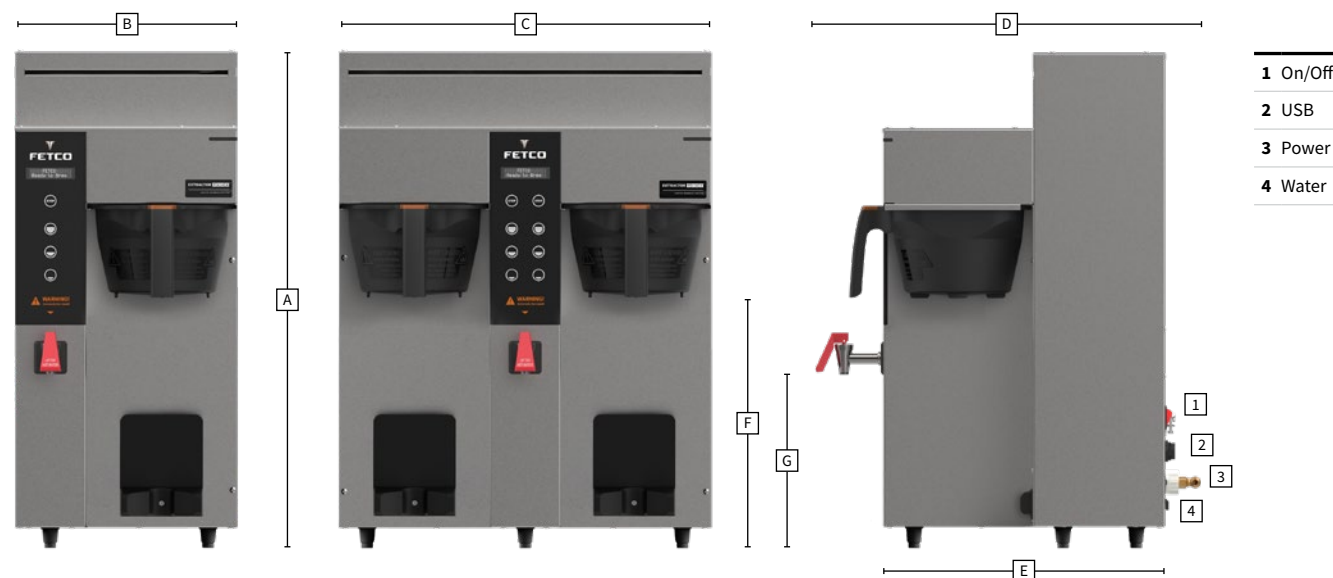

WEBSITE
fetco.com

EMAIL
orders@fetco.com

PHONE
+1.847.719.3000
1.800.338.2699 USA

FAX
+1.847.719.3001

ADDRESS
Food Equipment Technologies Co.
600 Rose Road
Lake Zurich, IL 60047, USA

© Copyright 2021 FETCO® is a mark of Food Equipment Technologies Company. Dispensers, airpots, paper filters, water filters, stands, accessories and options sold separately P203 Rev. 1.0 2021.2.1 Letter

COFFEE BREWING SYSTEMS
CBS-1230 Plus Brewers
3.0-4.0 LITER BREWING SYSTEM

Shown with D041 3.0L Airpot & D451 4.0L / 1G LUXUS® Thermal Server



PLUG AND PLAY OPERATION

Batch buttons are pre-programmed at the factory. If desired the USB port can be used to upload and download recipes.



CASCADING SPRAY DOME

Patented design provides even saturation of the coffee bed for maximum extraction. Lime resistant design for less service calls.



ACCESSORIES

CBS-1230 Plus Brewers

BREW BASKETS AND PAPER FILTERS

| Brewer SKU | Brew Basket | Coffee Capacity | Filter Size | Filter SKU | Filter/Case |
|--------------------|------------------------------------|------------------|-------------|------------|-------------|
| All configurations | Standard Plastic / Stainless Steel | Up to 8oz / 227g | 13" x 5" | F002 | 500/cs |




Contact Customer Service or your Sales Person for more options.

COLORED BREW BASKET HANDLE INSERTS



LEGS SETUP OPTIONS

Comes standard with 1" legs:
2.5" legs optional to accommodate the 3.8L Airpot.
Order set of 4 legs for 1231 Brewer
and set of 3 legs for 1232 Brewer.

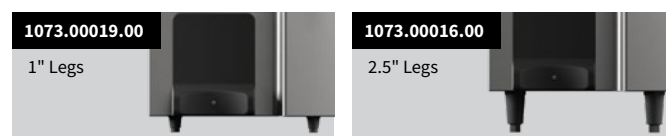

WATER FILTRATION SYSTEM

| Filtration System | SKU | Part | Rated Capacity | Working Pressure | Weight |
|-------------------|------|-----------------------|----------------|-------------------------------------|-------------------|
| Everpure® | A039 | In-Line System | 113,563 liters | 10-125 psi [0.7-8.6 bar], non-shock | 6.0 lbs / 2.7 kg |
| Everpure® | A075 | Replacement Cartridge | 113,563 liters | 10-125 psi [0.7-8.6 bar], non-shock | 6.0 lbs / 2.7 kg |
| BWT Bestmax | A138 | In-Line System | 3,002 liters | 29-116 psi [2-8 bar], non-shock | 11.0 lbs / 5.0 kg |
| BWT Bestmax | A139 | Replacement Cartridge | 3,002 liters | 29-116 psi [2-8 bar], non-shock | 11.0 lbs / 5.0 kg |
| BWT Bestmax | A140 | In-Line System | 4,562 liters | 29-116 psi [2-8 bar], non-shock | 11.0 lbs / 5.0 kg |
| BWT Bestmax | A141 | Replacement Cartridge | 4,562 liters | 29-116 psi [2-8 bar], non-shock | 11.0 lbs / 5.0 kg |



SET INCLUDES: 1ea. commercial quality corrosion resistant filter head 1ea. taste and odor filter cartridge (FETCO® #A075) / 1ea. 3/8" x 4' connection hose / 1 set — mounting bracket and hardware.

- Recommended for large-sized operations
- Taste and odor filter for extremely turbid (cloudy) water
- Granular-activated carbon reduces sediment and chlorine
- Quick-disconnect style head/cartridge design cartridge for effortless replacement
- Durable, corrosion-resistant head includes built-in shutoff valve



SET INCLUDES: 1ea. filter cartridge / 1ea. universal filter head / 1ea. wall mounting bracket Braided hose supplies 3/8" and 3/4" compression, in 24" or 48" lengths

- Recommended for small- to medium-sized operations
- Carbonate hardness removal prevents scale deposits and retains minerals
- Granular-activated carbon reduces sediment and chlorine
- Quick-disconnect style head/cartridge design cartridge for effortless replacement
- Durable, corrosion-resistant head includes built-in shutoff valve
- Four bypass settings allows for different water qualities and product preferences

TECHNICAL SPECIFICATIONS

NORTH AMERICA

CBS-1231 Plus Brewer

| Brewer SKU | Voltage | Heater Config. | Phase | Wires | kW | Connection | Max Amp Draw | [Gal] / [L] Hour | Certification |
|---------------------|-------------|----------------|-------|-------|-----|----------------|--------------|------------------|---------------|
| E1231US-1A115-PM001 | 120 | 1 x 1.5 kW | 1 | 2+G | 1.5 | NEMA 5-15P | 13.0 | 4.0 / 15.1 | NSF cULus |
| E1231US-1A123-PM002 | 120 | 1 x 2.3 kW | 1 | 2+G | 2.3 | NEMA 5-20P | 19.7 | 6.1 / 23.2 | NSF cULus |
| E1231US-1X117-PM001 | 120 | 1 x 1.7 kW | 1 | 2+G | 1.7 | NEMA 5-15P | 14.7 | 4.5 / 17.1 | NSF cULus |
| DUAL VOLTAGE | 120/208-240 | 2 x 1.7 kW | 1 | 3+G | 3.4 | Terminal Block | 12.8-14.7 | 7.9 / 30.0 | NSF cULus |

WATER

| Water Inlet | Water Pressure [psig] / [Bar] | Minimum Flow Rate [gpm] / [L/min] | Tank Capacity [Gal] / [L] |
|-----------------|-------------------------------|-----------------------------------|---------------------------|
| 3/8" Male Flare | 20-75 / 1.37-5.17 | 1.50 / 5.68 | 3.00 / 11.36 |

CUPS PER HOUR

| Cup size | 8 [oz] / 236 [ml] | 12 [oz] / 355 [ml] | 16 [oz] / 473 [ml] | 20 [oz] / 591 [ml] |
|--------------------------------|-------------------|--------------------|--------------------|--------------------|
| No. Cups per hour ² | 127 | 85 | 63 | 51 |

CBS-1232 Plus Brewer

| Brewer SKU | Voltage | Heater Config. | Phase | Wires | kW | Connection | Max Amp Draw | [Gal] / [L] Hour | Certification |
|---------------------|---------|----------------|-------|-------|---------|----------------|--------------|------------------|---------------|
| E1232US-1B223-PM000 | 208-240 | 2 x 2.3 kW | 1 | 2+G | 3.5-4.6 | Terminal Block | 17.1-19.7 | 12.2 / 46.3 | NSF cULus |
| E1232US-1B230-PM000 | 208-240 | 2 x 3.0 kW | 1 | 2+G | 4.5-6.0 | Terminal Block | 22.2-25.5 | 15.8 / 60.0 | NSF cULus |

WATER

| Water Inlet | Water Pressure [psig] / [Bar] | Minimum Flow Rate [gpm] / [L/min] | Tank Capacity [Gal] / [L] |
|-----------------|-------------------------------|-----------------------------------|---------------------------|
| 3/8" Male Flare | 20-75 / 1.37-5.17 | 1.50 / 5.68 | 5.48 / 10.07 |

CUPS PER HOUR

| Cup size | 8 [oz] / 236 [ml] | 12 [oz] / 355 [ml] | 16 [oz] / 473 [ml] | 20 [oz] / 591 [ml] |
|--------------------------------|-------------------|--------------------|--------------------|--------------------|
| No. Cups per hour ² | 254 | 169 | 127 | 101 |

INTERNATIONAL

CBS-1231 Plus Brewer

| Brewer SKU | Voltage | Heater Config. | Phase | Wires | kW | Connection | Max Amp Draw | [Gal] / [L] Hour | Certification |
|----------------------------------|-------------|----------------|-------|--------|---------|----------------|--------------|------------------|---------------|
| E1231IN-1B123-PM000 | 200-240 | 1 x 2.3 kW | 1 | 2+G | 1.6-2.3 | Terminal Block | 8.5-10.1 | 6.1 / 23.2 | NSF cULus |
| E1231IN-1B130-PM000 | 200-240 | 1 x 3.0 kW | 1 | 2+G | 2.1-3.0 | Terminal Block | 10.9-13.0 | 7.9 / 30.0 | NSF cULus |
| E1231NM-1A123-PM002 ¹ | 120 | 1 x 2.3 kW | 1 | 2+G | 2.3 | NEMA 5-20P | 19.7 | 6.1 / 23.2 | NSF NOM |
| E1231NM-1B130-PM003 ¹ | 208-240 | 1 x 3.0 kW | 1 | 2+G | 2.3-3.0 | NEMA 6-15P | 11.3-13.0 | 7.9 / 30.0 | NSF NOM |
| E1231NM-1X123-PM002 | 120 | 1 x 2.3 | 1 | 2+G | 2.3 | NEMA 5-20P | 19.7 | 6.1 / 23.2 | NSF NOM |
| DUAL VOLTAGE | 120/208-240 | 2 x 2.3 kW | 1 | 3+G | 4.6 | Terminal Block | 17.1-19.7 | 7.9 / 30.0 | NSF NOM |
| E1231CE-1B123-PM005 ¹ | 230 | 1 x 2.3 kW | 1 | L/N/PE | 2.1 | CEE 7/7 Shuko | 9.6 | 5.6 / 21.1 | NSF CE |
| E1231CE-1B130-PM005 ¹ | 230 | 1 x 3.0 kW | 1 | L/N/PE | 2.8 | CEE 7/7 Shuko | 12.5 | 7.4 / 28.2 | NSF CE |

WATER

| Water Inlet | Water Pressure [psig] / [Bar] | Minimum Flow Rate [gpm] / [L/min] | Tank Capacity [Gal] / [L] |
|-----------------|-------------------------------|-----------------------------------|---------------------------|
| 3/8" Male Flare | 20-75 / 1.37-5.17 | 1.50 / 5.68 | 3.00 / 11.36 |

CUPS PER HOUR

| Cup size | 8 [oz] / 236 [ml] | 12 [oz] / 355 [ml] | 16 [oz] / 473 [ml] | 20 [oz] / 591 [ml] |
|--------------------------------|-------------------|--------------------|--------------------|--------------------|
| No. Cups per hour ² | 127 | 85 | 63 | 51 |

CBS-1232 Plus Brewer

| Brewer SKU | Voltage | Heater Config. | Phase | Wires | kW | Connection | Max Amp Draw | [Gal] / [L] Hour | Certification |
|----------------------------------|---------|----------------|-------|---------|---------|----------------|--------------|------------------|---------------|
| E1232IN-1B223-PM000 | 200-240 | 2 x 2.3 kW | 1 | 2+G | 3.2-4.6 | Terminal Block | 16.5-19.7 | 12.2 / 46.3 | NSF cULus |
| E1232IN-1B230-PM000 | 200-240 | 2 x 3.0 kW | 1 | 2+G | 4.2-6.0 | Terminal Block | 21.3-25.5 | 15.8 / 60.0 | NSF cULus |
| E1232NM-1B230-PM000 | 208-240 | 2 x 3.0 kW | 1 | 2+G | 4.5-6.0 | Terminal Block | 22.2-25.5 | 15.8 / 60.0 | NSF NOM |
| E1232CE-2B223-PM000 ¹ | 230/400 | 2 x 2.3 kW | 2 | 2L/N/PE | 4.2 | Terminal Block | 9.7 | 11.2 / 42.3 | NSF CE |
| E1232CE-2B230-PM000 | 230/400 | 2 x 3.0 kW | 2 | 2L/N/PE | 5.5 | Terminal Block | 12.5 | 14.6 / 55.4 | NSF CE |
| E1232CE-1B223-PM000 ¹ | 230 | 2 x 2.3 kW | 1 | L/N/PE | 4.2 | Terminal Block | 18.9 | 11.2 / 42.3 | NSF CE |
| E1232CE-1B230-PM000 ¹ | 230 | 2 x 3.0 kW | 1 | L/N/PE | 5.5 | Terminal Block | 24.5 | 14.6 / 55.4 | NSF CE |

WATER

| Water Inlet | Water Pressure [psig] / [Bar] | Minimum Flow Rate [gpm] / [L/min] | Tank Capacity [Gal] / [L] |
|-----------------|-------------------------------|-----------------------------------|---------------------------|
| 3/8" Male Flare | 20-75 / 1.37-5.17 | 1.50 / 5.68 | 5.48 / 20.74 |

CUPS PER HOUR

| Cup size | 8 [oz] / 236 [ml] | 12 [oz] / 355 [ml] | 16 [oz] / 473 [ml] | 20 [oz] / 591 [ml] |
|--------------------------------|-------------------|--------------------|--------------------|--------------------|
| No. Cups per hour ² | 254 | 169 | 127 | 101 |

¹ This version is made to order and it might require longer production lead time. Please ask your local sales representative for more information.

² Based on standard factory settings: 5.5 minute brew time; 0% prewet; 93°C water. 3 liters per batch.