

Lighting
Shelf 90 cm
Black anodized



EAN 5414425235452

Functions & features

- Control method Gesture Control

Dimensions


- Product dimensions (WxDxH) (mm) 919 x 320 x 60

Lighting

- Functional lighting type LED
- Functional light dimmable ▪
- Gross luminous flux functional lighting (Lm/m) 1983
- Color functional light (K) 2700-4000
- Color Rendering Index (CRI) ≥90
- Ambient lighting type LED
- Ambient light dimmable ▪
- Gross luminous flux ambient lighting (Lm/m) 324
- Color ambient light RGBW

Technical specifications

- Maximum power (W) 23
- Frequency (Hz) 50
- Power consumption in stand-by-mode (Ps) (W) 0
- Net weight (kg) 4,5
- Position electrical cable Left
- Length power supply cable (m) 3,1
- Safetyclass II
- Voltage lighting (V) 230

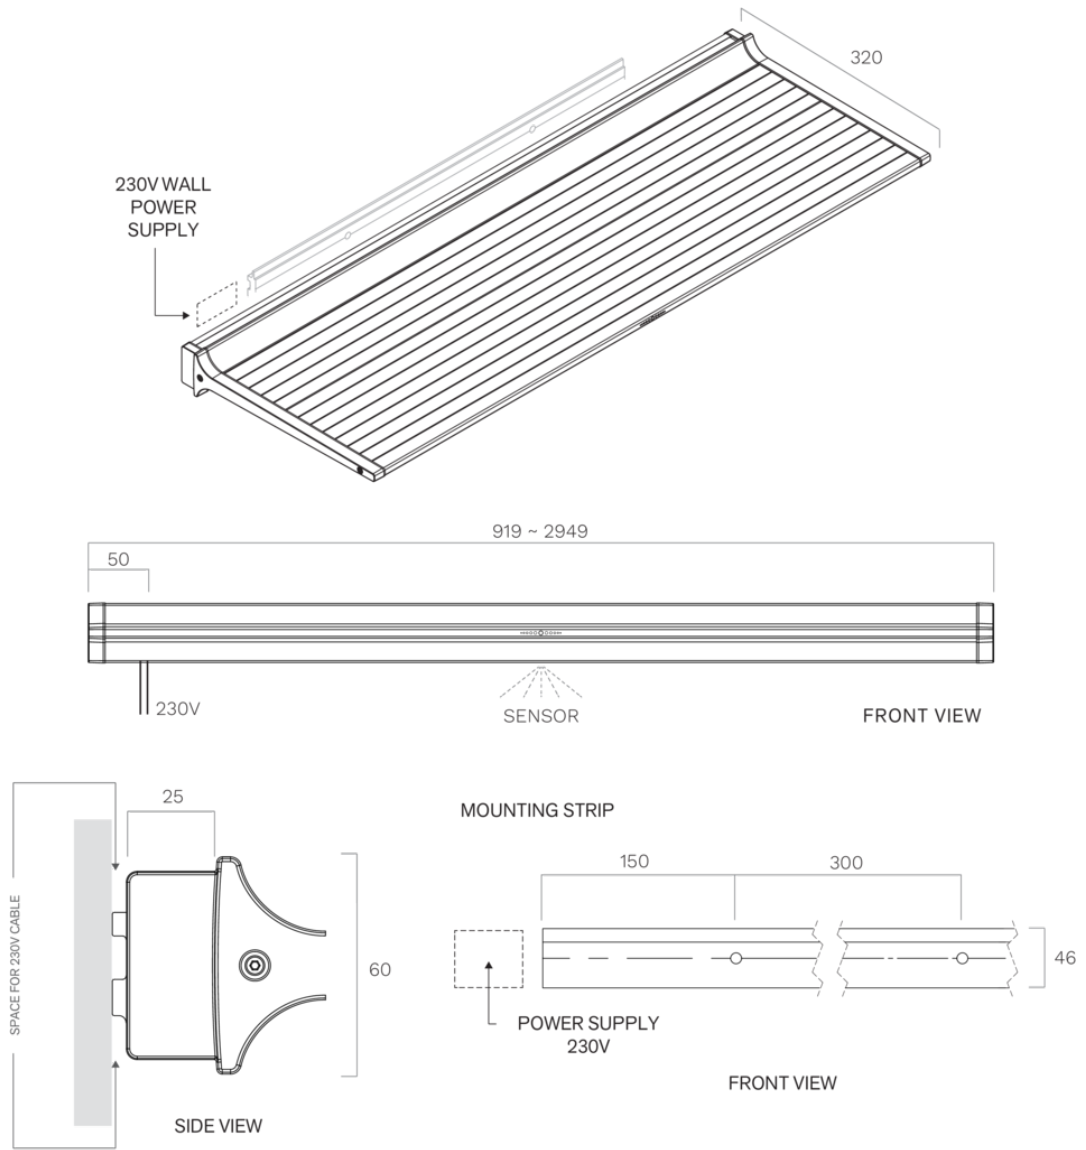

Lighting
Shelf 120 cm
Black anodized



EAN 5414425235469

Functions & features

- Control method Gesture Control

Dimensions


- Product dimensions (WxDxH) (mm) 1209 x 320 x 60

Lighting

- Functional lighting type LED
- Functional light dimmable ▪
- Gross luminous flux functional lighting (Lm/m) 1983
- Color functional light (K) 2700-4000
- Color Rendering Index (CRI) ≥90
- Ambient lighting type LED
- Ambient light dimmable ▪
- Gross luminous flux ambient lighting (Lm/m) 324
- Color ambient light RGBW

Technical specifications

- Maximum power (W) 30
- Frequency (Hz) 50
- Power consumption in stand-by-mode (Ps) (W) 0
- Net weight (kg) 6,2
- Position electrical cable Left
- Length power supply cable (m) 2,8
- Safetyclass II
- Voltage lighting (V) 230

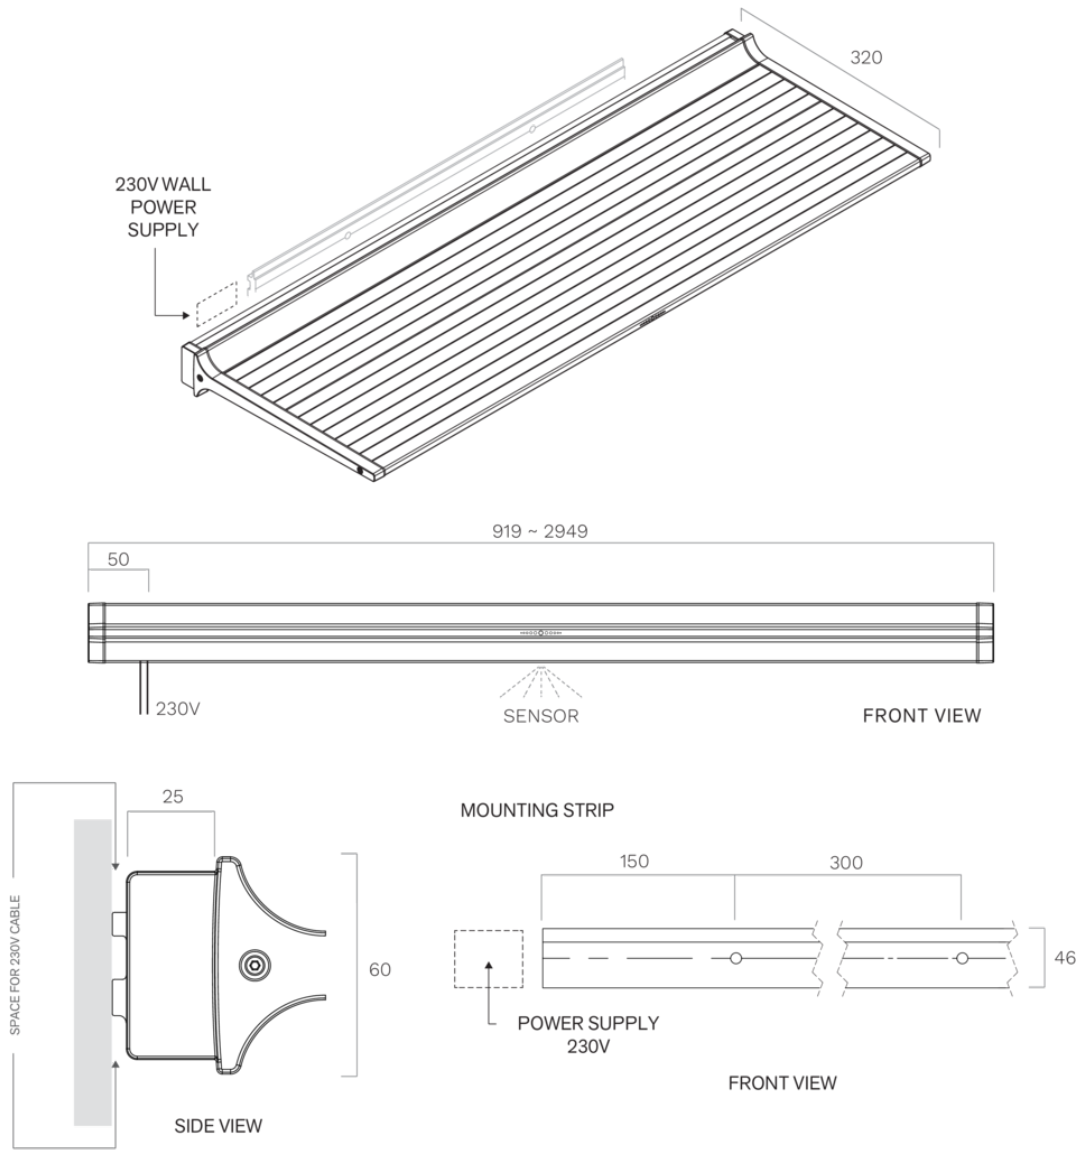

Lighting
Shelf 150 cm
Black anodized



EAN 5414425235476

Functions & features

- Control method Gesture Control

Dimensions


- Product dimensions (WxDxH) (mm) 1499 x 320 x 60

Lighting

- Functional lighting type LED
- Functional light dimmable ▪
- Gross luminous flux functional lighting (Lm/m) 1983
- Color functional light (K) 2700-4000
- Color Rendering Index (CRI) ≥90
- Ambient lighting type LED
- Ambient light dimmable ▪
- Gross luminous flux ambient lighting (Lm/m) 324
- Color ambient light RGBW

Technical specifications

- Maximum power (W) 36
- Frequency (Hz) 50
- Power consumption in stand-by-mode (Ps) (W) 0
- Net weight (kg) 8
- Position electrical cable Left
- Length power supply cable (m) 2,5
- Safetyclass II
- Voltage lighting (V) 230

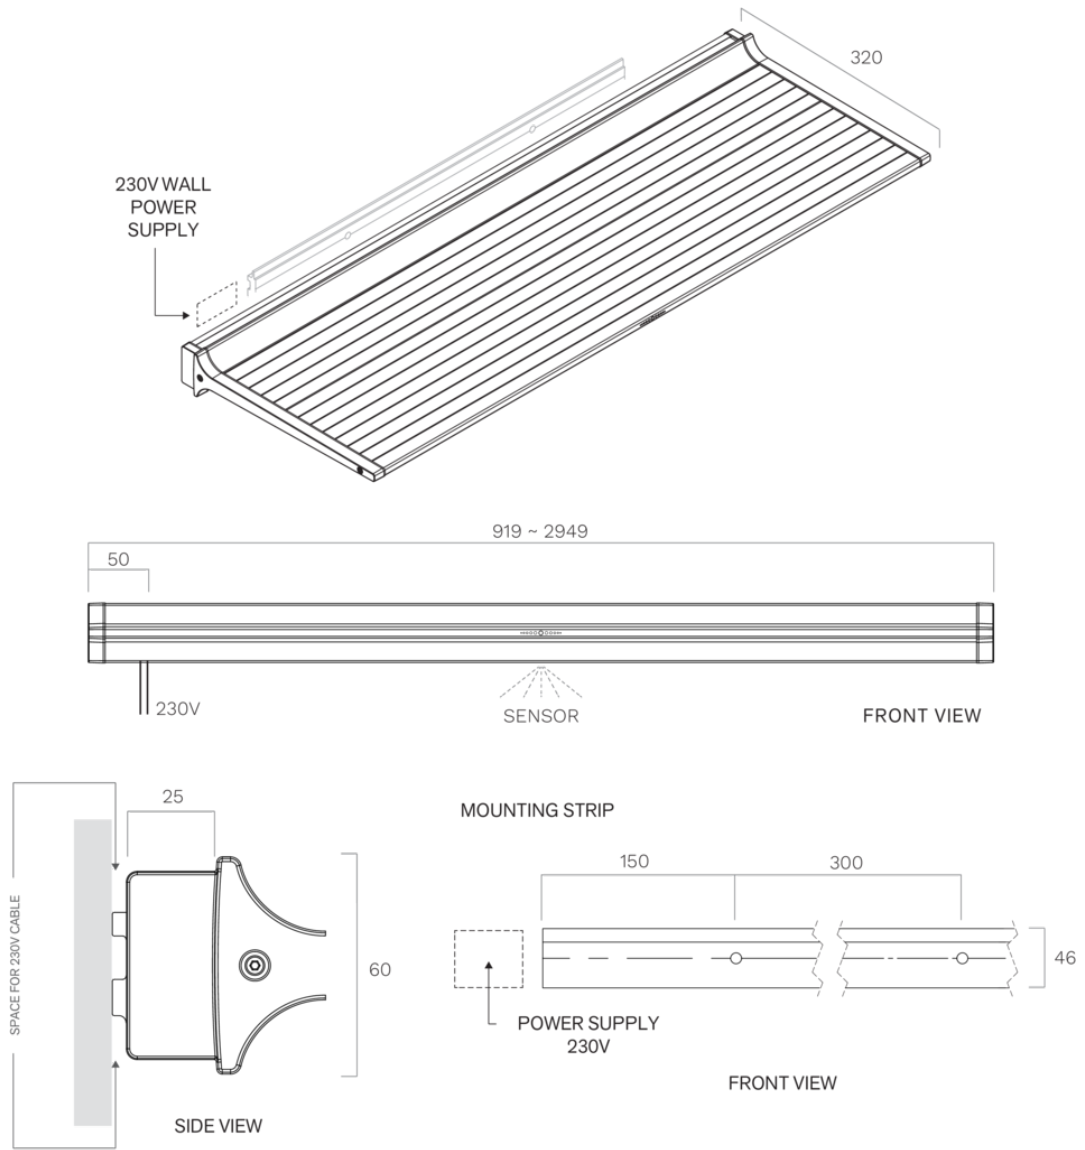

Lighting
Shelf 180 cm
Black anodized



EAN 5414425235483

Functions & features

- Control method Gesture Control

Dimensions


- Product dimensions (WxDxH) (mm) 1789 x 320 x 60

Lighting

- Functional lighting type LED
- Functional light dimmable ▪
- Gross luminous flux functional lighting (Lm/m) 1983
- Color functional light (K) 2700-4000
- Color Rendering Index (CRI) ≥90
- Ambient lighting type LED
- Ambient light dimmable ▪
- Gross luminous flux ambient lighting (Lm/m) 324
- Color ambient light RGBW

Technical specifications

- Maximum power (W) 42
- Frequency (Hz) 50
- Power consumption in stand-by-mode (Ps) (W) 0
- Net weight (kg) 9,9
- Position electrical cable Left
- Length power supply cable (m) 2,2
- Safetyclass II
- Voltage lighting (V) 230

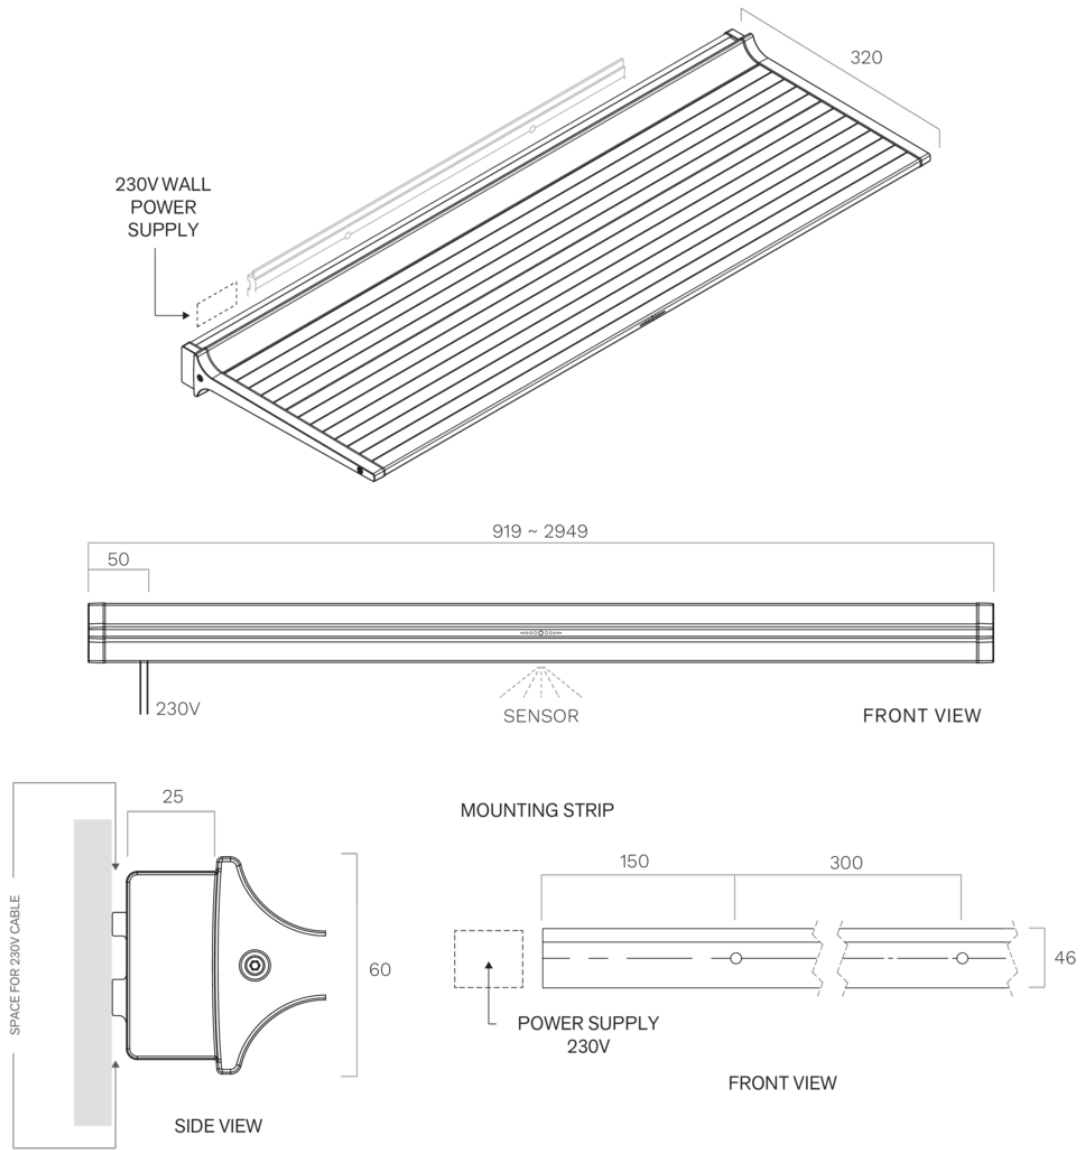

Lighting
Shelf 210 cm
Black anodized



EAN 5414425235490

Functions & features

- Control method Gesture Control

Dimensions


- Product dimensions (WxDxH) (mm) 2079 x 320 x 60

Lighting

- Functional lighting type LED
- Functional light dimmable ▪
- Gross luminous flux functional lighting (Lm/m) 1983
- Color functional light (K) 2700-4000
- Color Rendering Index (CRI) ≥90
- Ambient lighting type LED
- Ambient light dimmable ▪
- Gross luminous flux ambient lighting (Lm/m) 324
- Color ambient light RGBW

Technical specifications

- Maximum power (W) 50
- Frequency (Hz) 50
- Power consumption in stand-by-mode (Ps) (W) 0
- Net weight (kg) 11,6
- Position electrical cable Left
- Length power supply cable (m) 1,9
- Safetyclass II
- Voltage lighting (V) 230

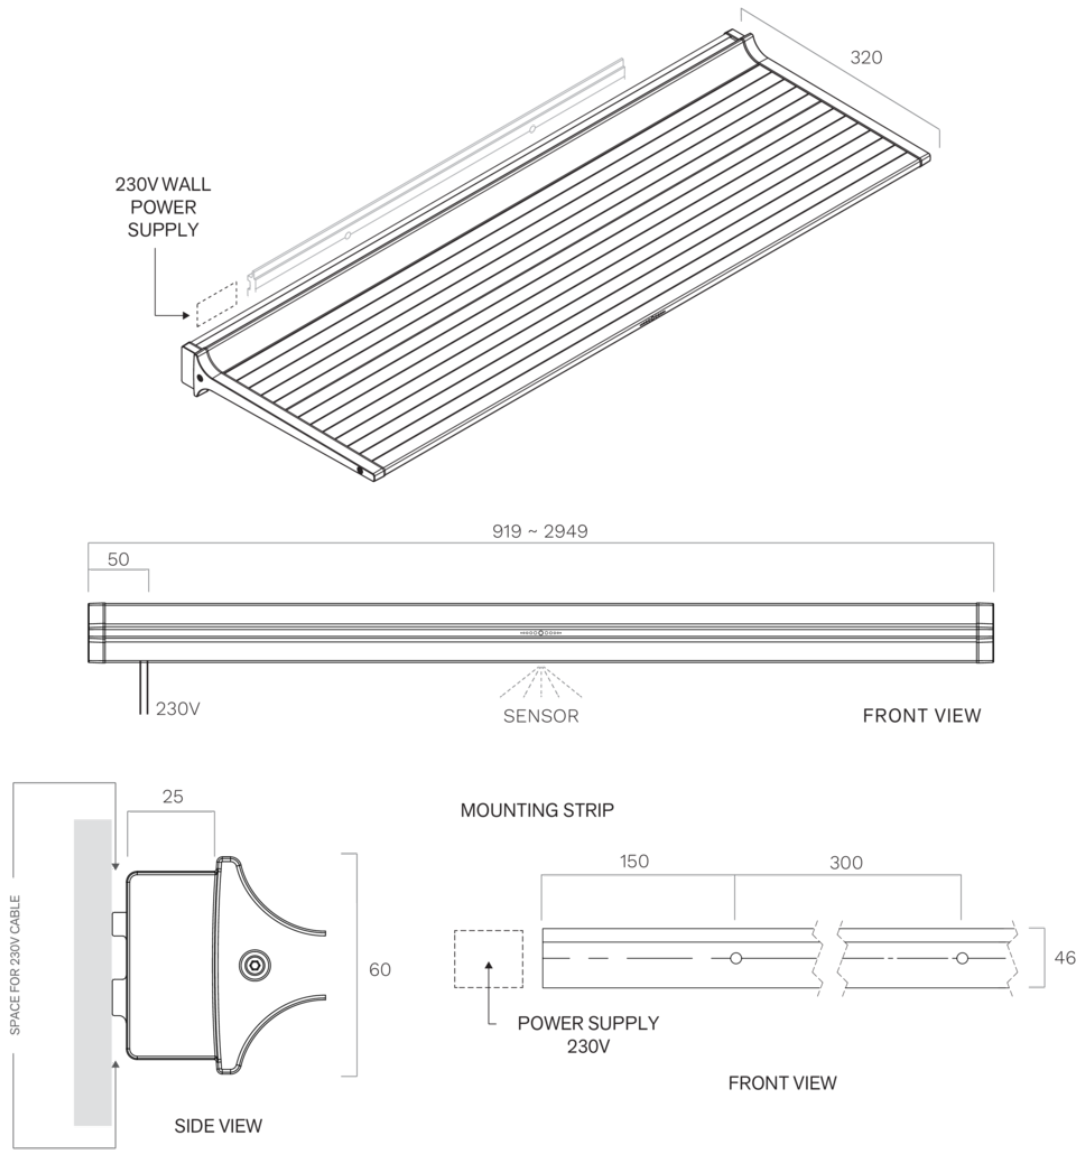

Lighting
Shelf 240 cm
Black anodized



EAN 5414425235506

Functions & features

- Control method Gesture Control

Dimensions


- Product dimensions (WxDxH) (mm) 2369 x 320 x 60

Lighting

- Functional lighting type LED
- Functional light dimmable ▪
- Gross luminous flux functional lighting (Lm/m) 1983
- Color functional light (K) 2700-4000
- Color Rendering Index (CRI) ≥90
- Ambient lighting type LED
- Ambient light dimmable ▪
- Gross luminous flux ambient lighting (Lm/m) 324
- Color ambient light RGBW

Technical specifications

- Maximum power (W) 56
- Frequency (Hz) 50
- Power consumption in stand-by-mode (Ps) (W) 0
- Net weight (kg) 13,4
- Position electrical cable Left
- Length power supply cable (m) 1,6
- Safetyclass II
- Voltage lighting (V) 230

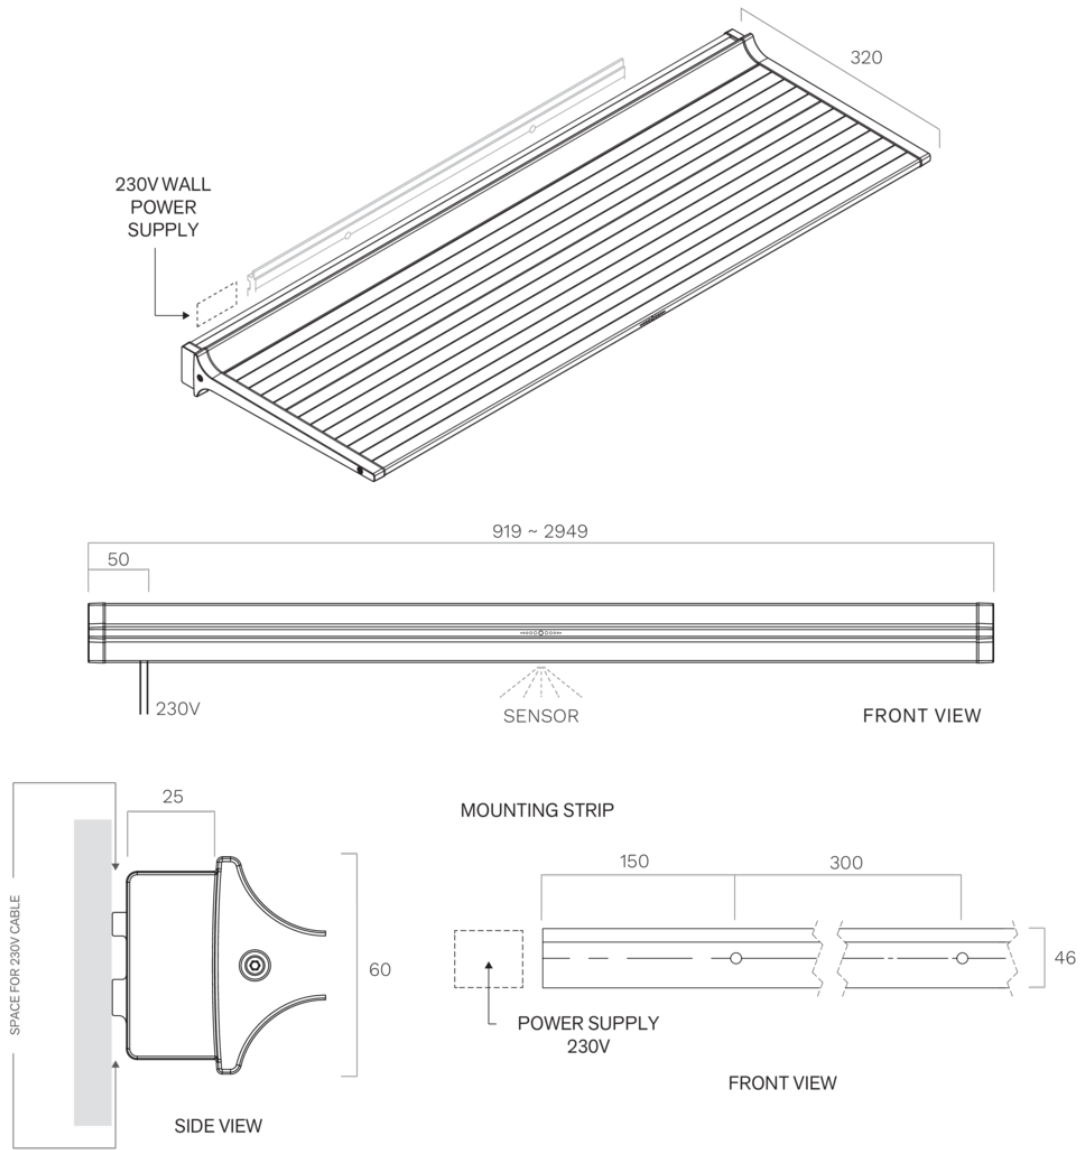

Lighting
Shelf 270 cm
Black anodized



EAN 5414425235513

Functions & features

- Control method Gesture Control

Dimensions


- Product dimensions (WxDxH) (mm) 2659 x 320 x 60

Lighting

- Functional lighting type LED
- Functional light dimmable ▪
- Gross luminous flux functional lighting (Lm/m) 1983
- Color functional light (K) 2700-4000
- Color Rendering Index (CRI) ≥90
- Ambient lighting type LED
- Ambient light dimmable ▪
- Gross luminous flux ambient lighting (Lm/m) 324
- Color ambient light RGBW

Technical specifications

- Maximum power (W) 62
- Frequency (Hz) 50
- Power consumption in stand-by-mode (Ps) (W) 0
- Net weight (kg) 15,2
- Position electrical cable Left
- Length power supply cable (m) 1,3
- Safetyclass II
- Voltage lighting (V) 230

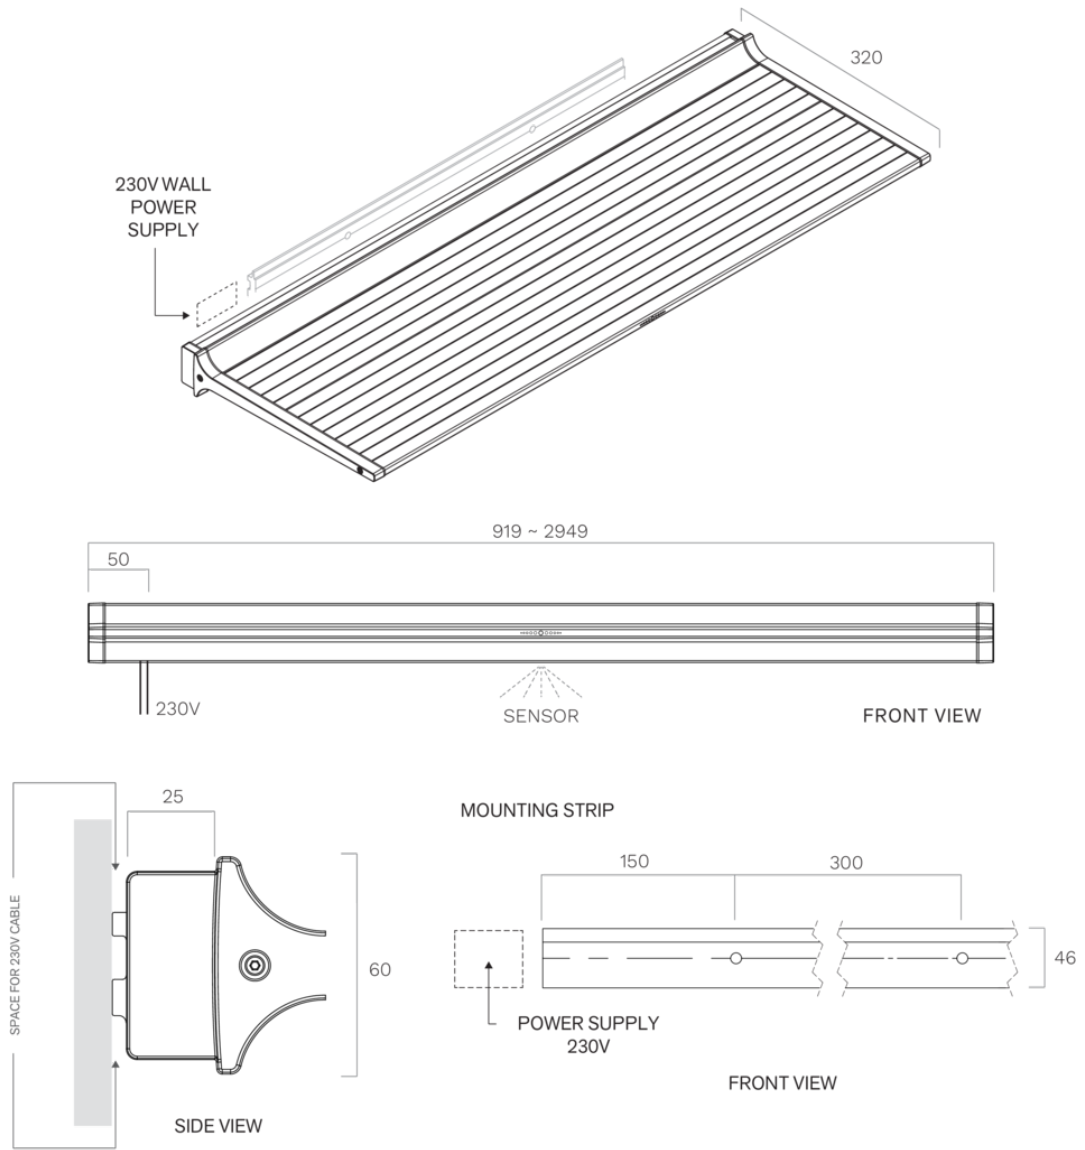

Lighting
Shelf 300 cm
Black anodized

EAN 5414425235520

Functions & features

▪ Control method	Gesture Control
------------------	-----------------

Dimensions

▪ Product dimensions (WxDxH) (mm)	2949 x 320 x 60
-----------------------------------	-----------------

Lighting

▪ Functional lighting type	LED
▪ Functional light dimmable	▪
▪ Gross luminous flux functional lighting (Lm/m)	1983
▪ Color functional light (K)	2700-4000
▪ Color Rendering Index (CRI)	≥90
▪ Ambient lighting type	LED
▪ Ambient light dimmable	▪
▪ Gross luminous flux ambient lighting (Lm/m)	324
▪ Color ambient light	RGBW

Technical specifications

▪ Maximum power (W)	68
▪ Frequency (Hz)	50
▪ Power consumption in stand-by-mode (Ps) (W)	0
▪ Net weight (kg)	17
▪ Position electrical cable	Left
▪ Length power supply cable (m)	1
▪ Safetyclass	II
▪ Voltage lighting (V)	230

