

Lighting
Pendant 90 cm
Black anodized



EAN 5414425235377

Functions & features

- Control method Gesture Control

Dimensions


- Product dimensions (WxDxH) (mm) 919 x 30 x 75

Lighting

- Functional lighting type LED
- Functional light dimmable ▪
- Gross luminous flux functional lighting (Lm/m) 1983
- Color functional light (K) 2700-4000
- Color Rendering Index (CRI) ≥90
- Ambient lighting type LED
- Ambient light dimmable ▪
- Gross luminous flux ambient lighting (Lm/m) 324
- Color ambient light RGBW

Technical specifications

- Maximum power (W) 23
- Frequency (Hz) 50
- Power consumption in stand-by-mode (Ps) (W) 0
- Net weight (kg) 2,1
- Position electrical cable Left/Right
- Length power supply cable (m) 4,5
- Safetyclass II
- Voltage lighting (V) 230

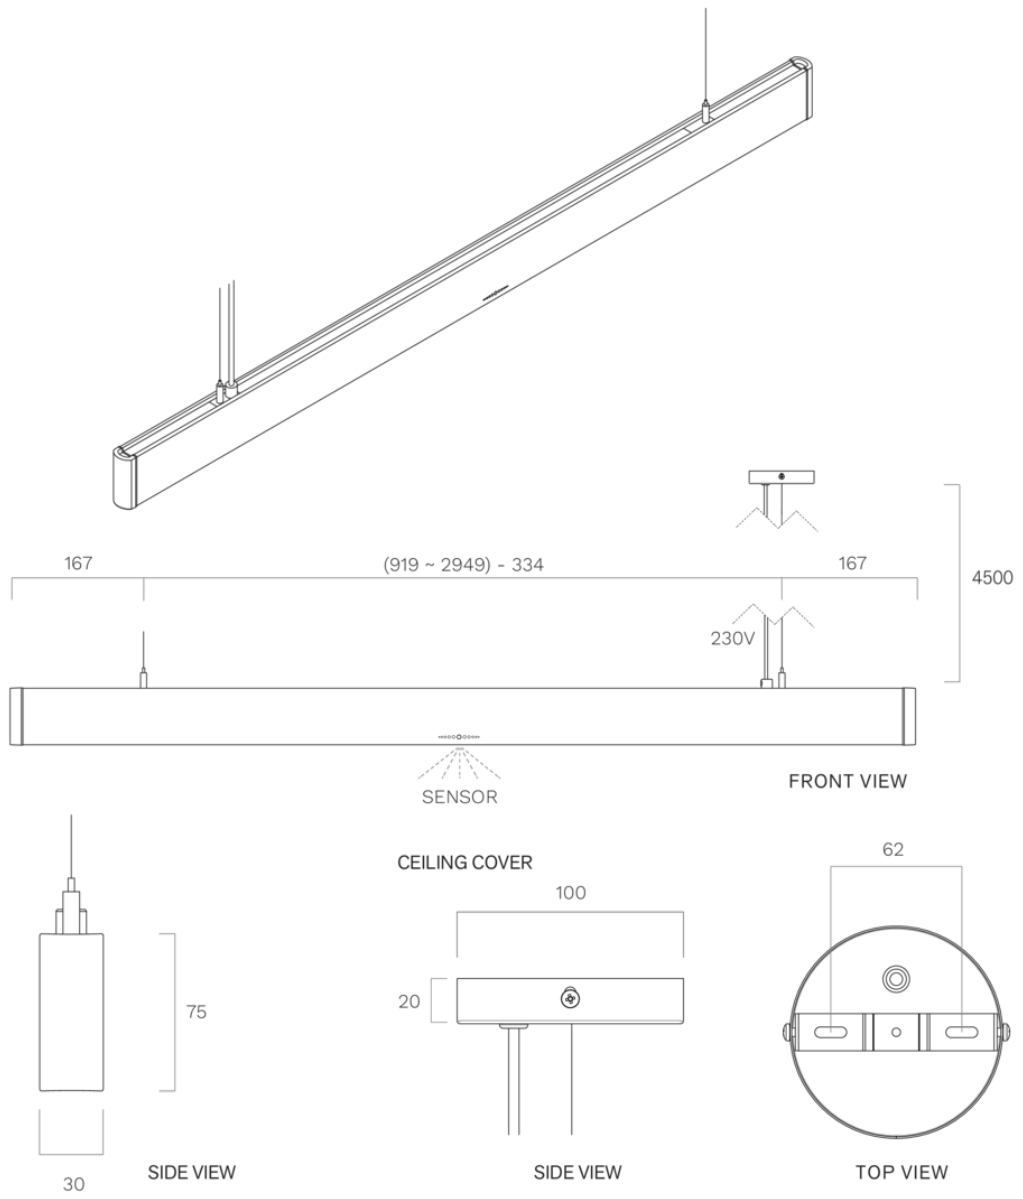

Lighting
Pendant 120 cm
Black anodized



EAN 5414425235384

Functions & features

- Control method Gesture Control

Dimensions


- Product dimensions (WxDxH) (mm) 1209 x 30 x 75

Lighting

- Functional lighting type LED
- Functional light dimmable ▪
- Gross luminous flux functional lighting (Lm/m) 1983
- Color functional light (K) 2700-4000
- Color Rendering Index (CRI) ≥90
- Ambient lighting type LED
- Ambient light dimmable ▪
- Gross luminous flux ambient lighting (Lm/m) 324
- Color ambient light RGBW

Technical specifications

- Maximum power (W) 30
- Frequency (Hz) 50
- Power consumption in stand-by-mode (Ps) (W) 0
- Net weight (kg) 2,8
- Position electrical cable Left/Right
- Length power supply cable (m) 4,5
- Safetyclass II
- Voltage lighting (V) 230

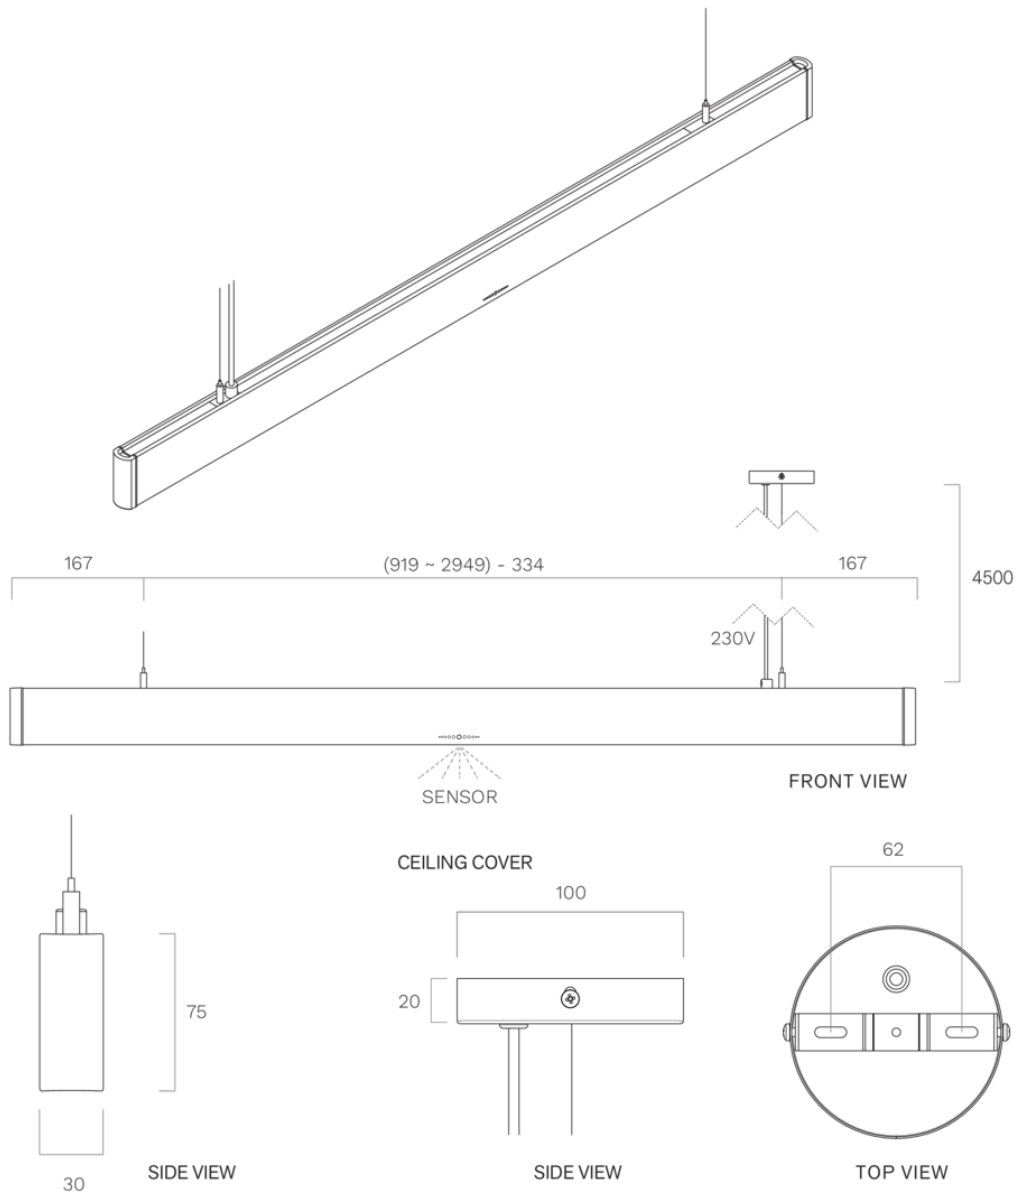

Lighting
Pendant 150 cm
Black anodized



EAN 5414425235391

Functions & features

- Control method Gesture Control

Dimensions


- Product dimensions (WxDxH) (mm) 1499 x 30 x 75

Lighting

- Functional lighting type LED
- Functional light dimmable ▪
- Gross luminous flux functional lighting (Lm/m) 1983
- Color functional light (K) 2700-4000
- Color Rendering Index (CRI) ≥90
- Ambient lighting type LED
- Ambient light dimmable ▪
- Gross luminous flux ambient lighting (Lm/m) 324
- Color ambient light RGBW

Technical specifications

- Maximum power (W) 36
- Frequency (Hz) 50
- Power consumption in stand-by-mode (Ps) (W) 0
- Net weight (kg) 3,5
- Position electrical cable Left/Right
- Length power supply cable (m) 4,5
- Safetyclass II
- Voltage lighting (V) 230

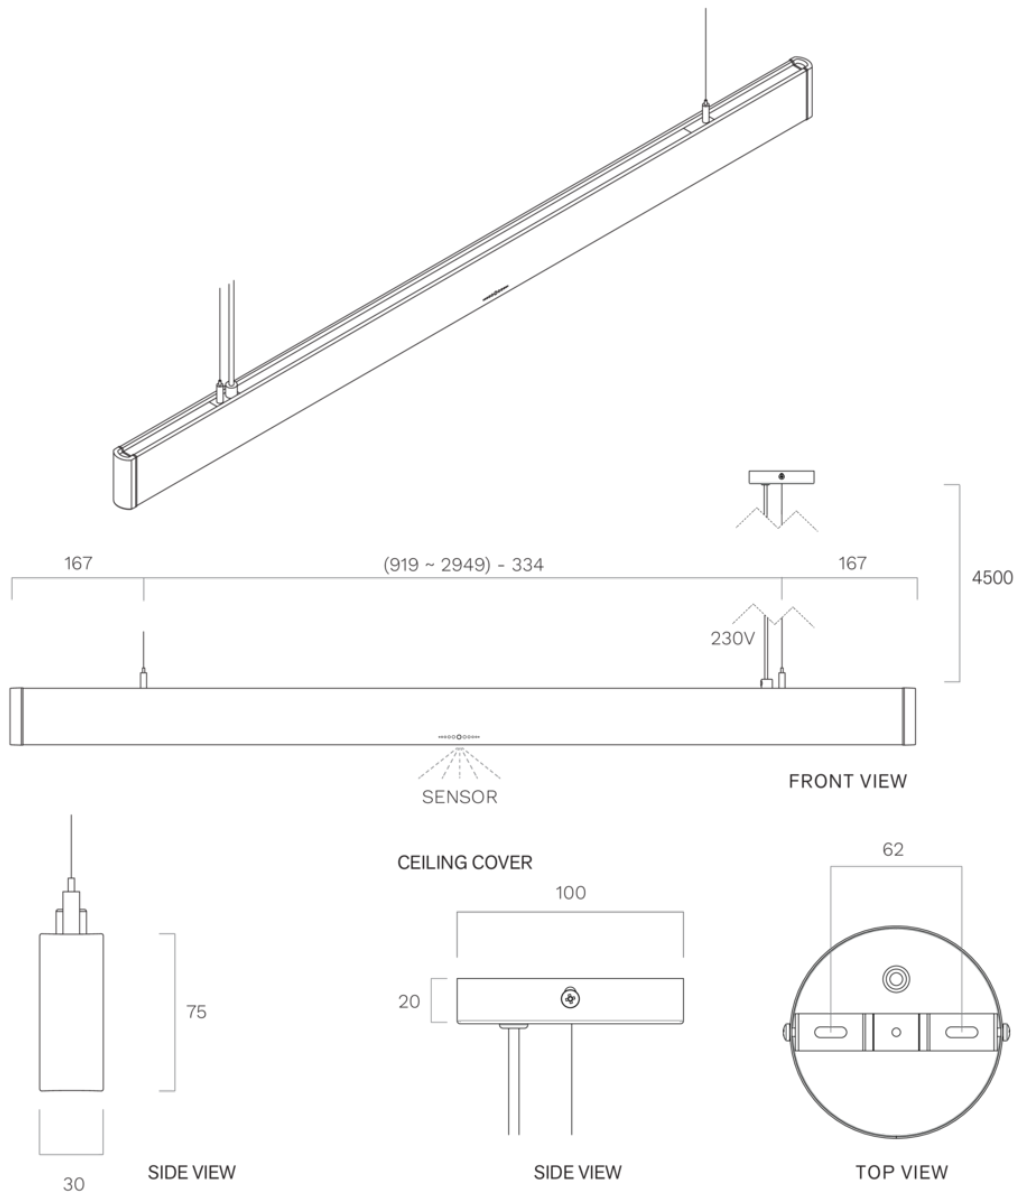

Lighting
Pendant 180 cm
Black anodized



EAN 5414425235407

Functions & features

- Control method Gesture Control

Dimensions


- Product dimensions (WxDxH) (mm) 1789 x 30 x 75

Lighting

- Functional lighting type LED
- Functional light dimmable ▪
- Gross luminous flux functional lighting (Lm/m) 1983
- Color functional light (K) 2700-4000
- Color Rendering Index (CRI) ≥90
- Ambient lighting type LED
- Ambient light dimmable ▪
- Gross luminous flux ambient lighting (Lm/m) 324
- Color ambient light RGBW

Technical specifications

- Maximum power (W) 42
- Frequency (Hz) 50
- Power consumption in stand-by-mode (Ps) (W) 0
- Net weight (kg) 4,2
- Position electrical cable Left/Right
- Length power supply cable (m) 4,5
- Safetyclass II
- Voltage lighting (V) 230

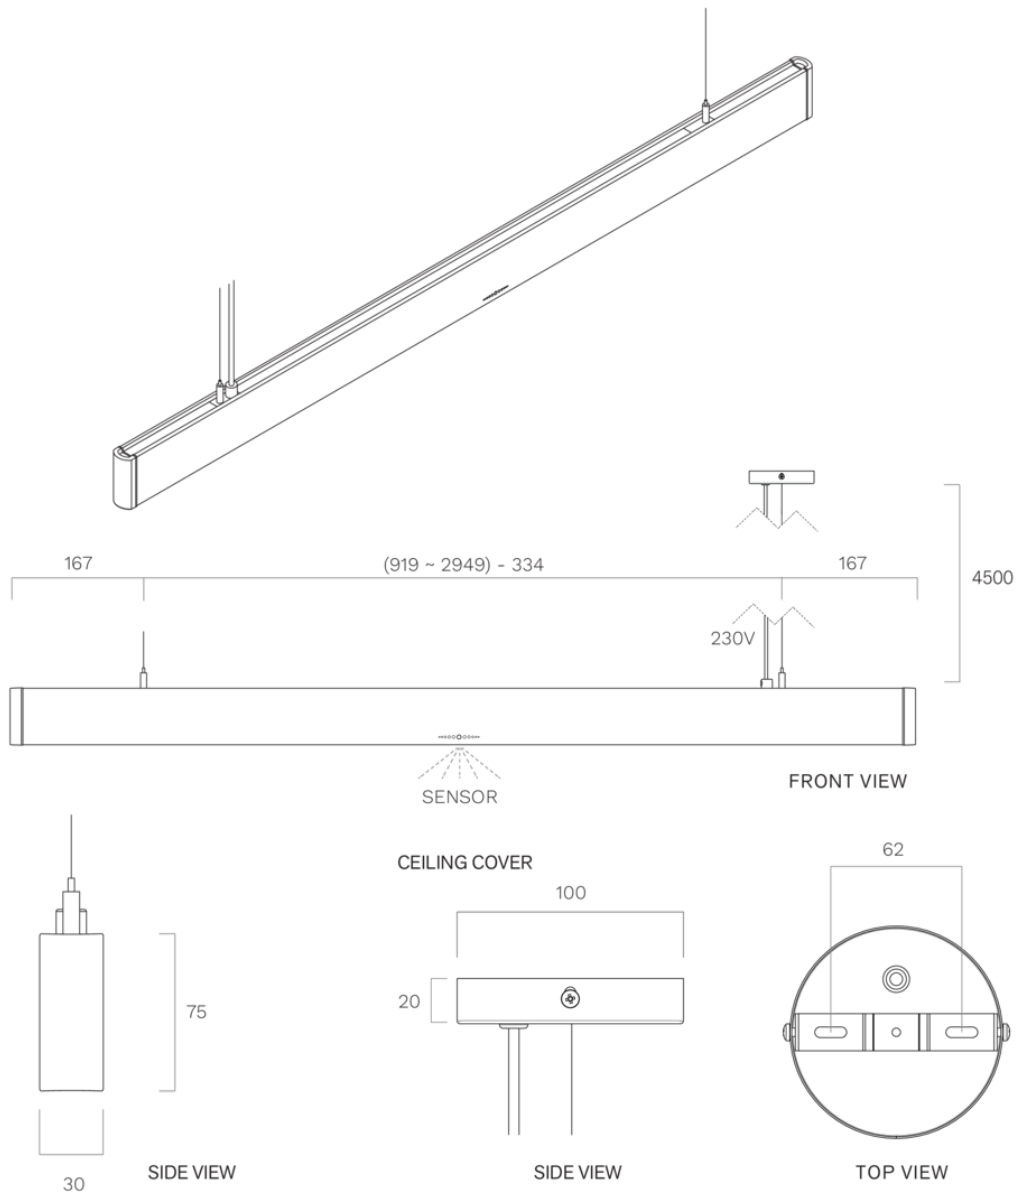

Lighting
Pendant 210 cm
Black anodized

EAN 5414425235414

Functions & features

▪ Control method	Gesture Control
------------------	-----------------

Dimensions


▪ Product dimensions (WxDxH) (mm)	2079 x 30 x 75
-----------------------------------	----------------

Lighting

▪ Functional lighting type	LED
▪ Functional light dimmable	▪
▪ Gross luminous flux functional lighting (Lm/m)	1983
▪ Color functional light (K)	2700-4000
▪ Color Rendering Index (CRI)	≥90
▪ Ambient lighting type	LED
▪ Ambient light dimmable	▪
▪ Gross luminous flux ambient lighting (Lm/m)	324
▪ Color ambient light	RGBW

Technical specifications

▪ Maximum power (W)	50
▪ Frequency (Hz)	50
▪ Power consumption in stand-by-mode (Ps) (W)	0
▪ Net weight (kg)	4,9
▪ Position electrical cable	Left/Right
▪ Length power supply cable (m)	4,5
▪ Safetyclass	II
▪ Voltage lighting (V)	230

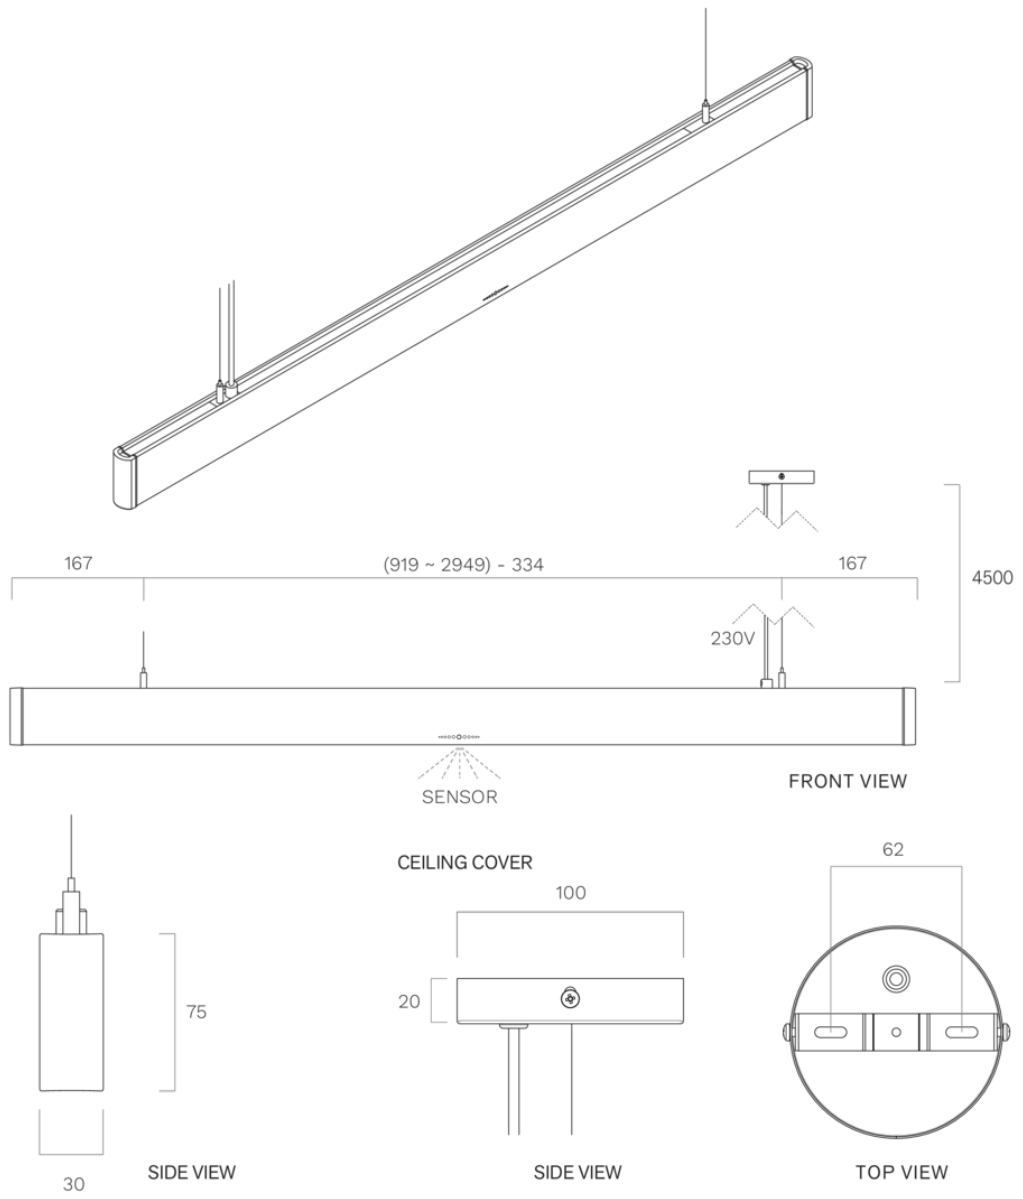

Lighting
Pendant 240 cm
Black anodized

EAN 5414425235421

Functions & features

- Control method Gesture Control

Dimensions


- Product dimensions (WxDxH) (mm) 2369 x 30 x 75

Lighting

- Functional lighting type LED
- Functional light dimmable ▪
- Gross luminous flux functional lighting (Lm/m) 1983
- Color functional light (K) 2700-4000
- Color Rendering Index (CRI) ≥90
- Ambient lighting type LED
- Ambient light dimmable ▪
- Gross luminous flux ambient lighting (Lm/m) 324
- Color ambient light RGBW

Technical specifications

- Maximum power (W) 56
- Frequency (Hz) 50
- Power consumption in stand-by-mode (Ps) (W) 0
- Net weight (kg) 5,6
- Position electrical cable Left/Right
- Length power supply cable (m) 4,5
- Safetyclass II
- Voltage lighting (V) 230

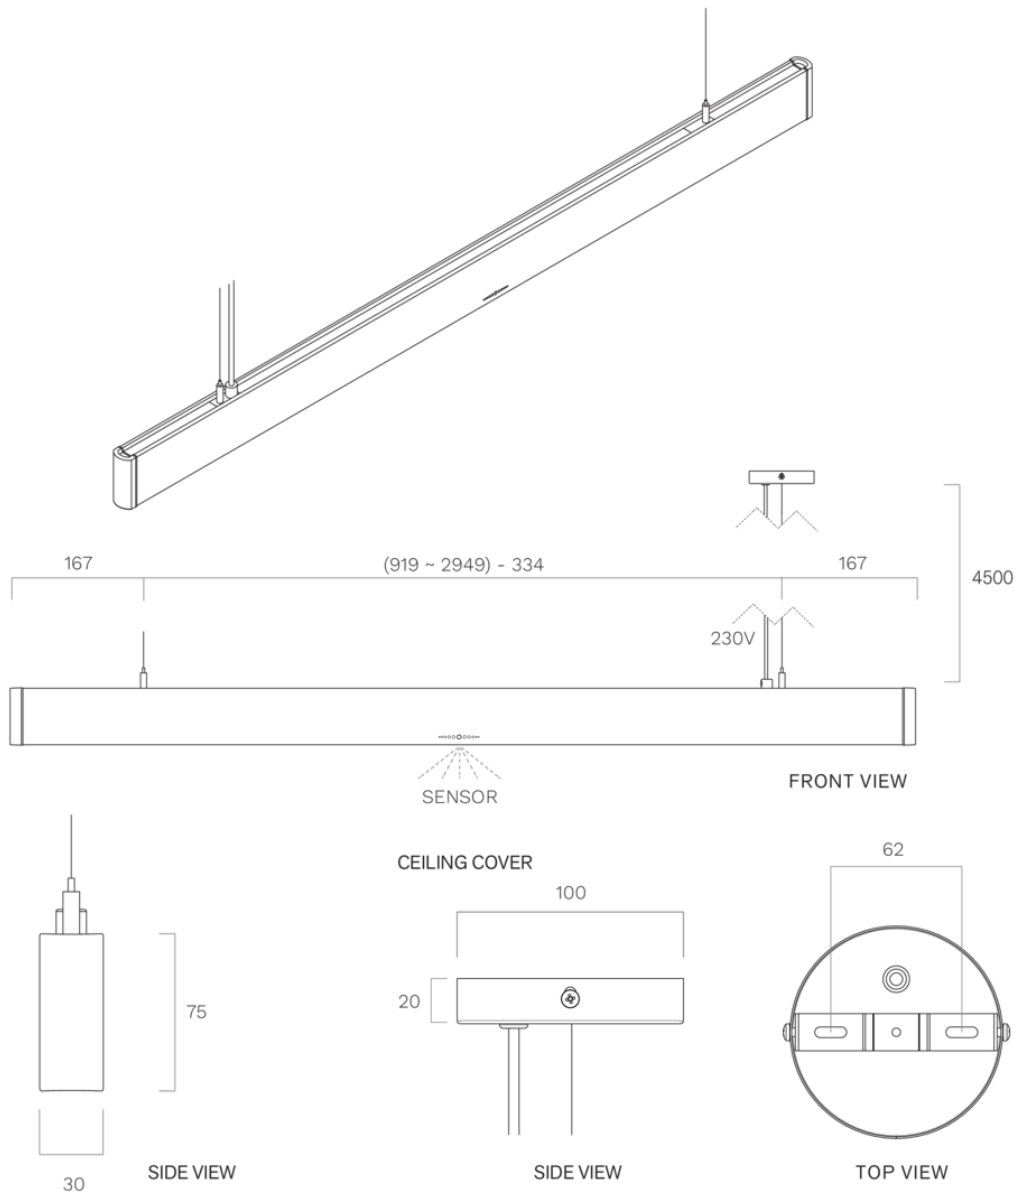

Lighting
Pendant 270 cm
Black anodized

EAN 5414425235438

Functions & features

- Control method Gesture Control

Dimensions


- Product dimensions (WxDxH) (mm) 2659 x 30 x 75

Lighting

- Functional lighting type LED
- Functional light dimmable ▪
- Gross luminous flux functional lighting (Lm/m) 1983
- Color functional light (K) 2700-4000
- Color Rendering Index (CRI) ≥90
- Ambient lighting type LED
- Ambient light dimmable ▪
- Gross luminous flux ambient lighting (Lm/m) 324
- Color ambient light RGBW

Technical specifications

- Maximum power (W) 62
- Frequency (Hz) 50
- Power consumption in stand-by-mode (Ps) (W) 0
- Net weight (kg) 6,3
- Position electrical cable Left/Right
- Length power supply cable (m) 4,5
- Safetyclass II
- Voltage lighting (V) 230

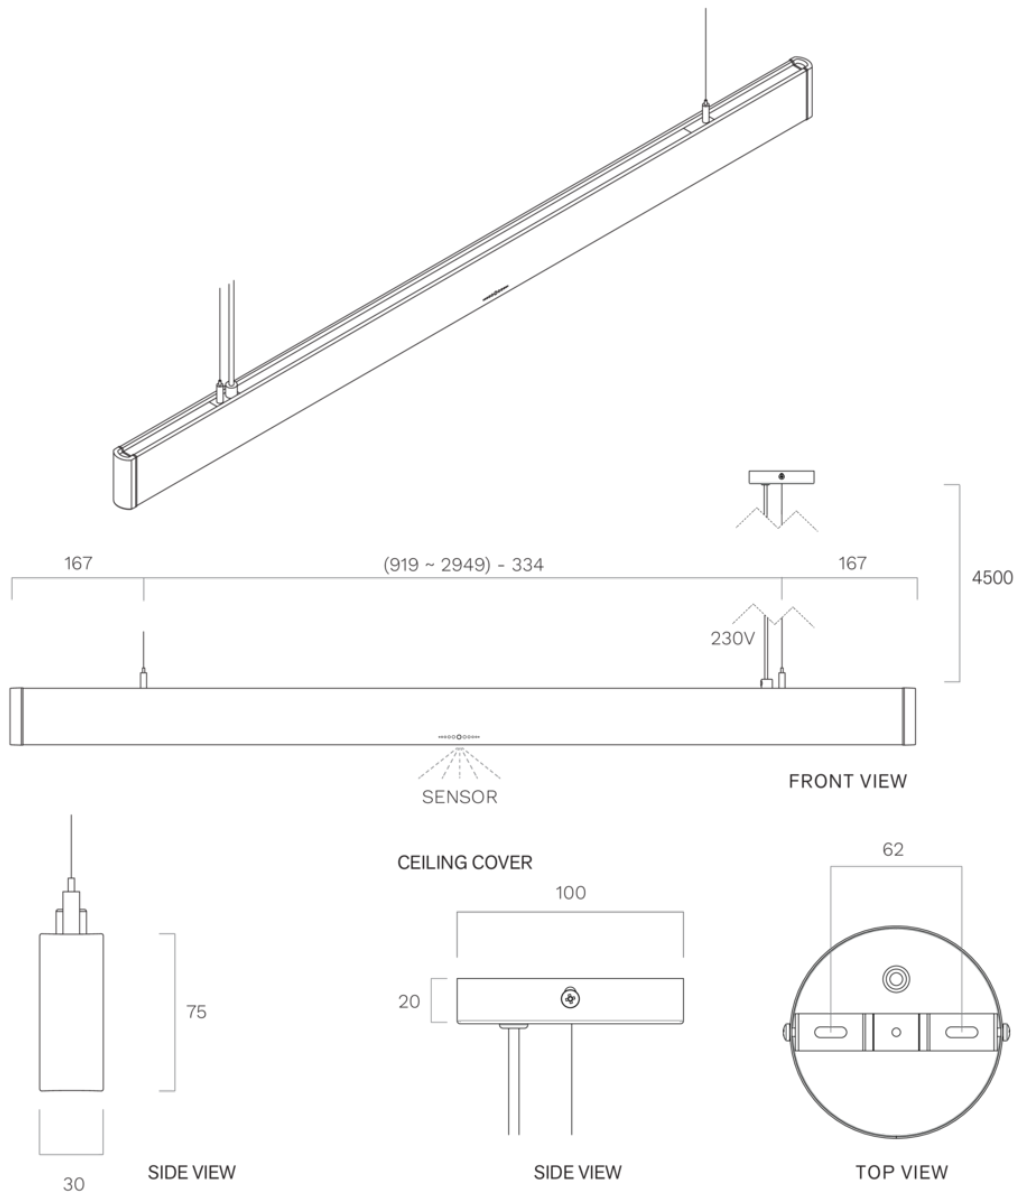

Lighting
Pendant 300 cm
Black anodized

EAN 5414425235445

Functions & features

▪ Control method	Gesture Control
------------------	-----------------

Dimensions

▪ Product dimensions (WxDxH) (mm)	2949 x 30 x 75
-----------------------------------	----------------

Lighting

▪ Functional lighting type	LED
▪ Functional light dimmable	▪
▪ Gross luminous flux functional lighting (Lm/m)	1983
▪ Color functional light (K)	2700-4000
▪ Color Rendering Index (CRI)	≥90
▪ Ambient lighting type	LED
▪ Ambient light dimmable	▪
▪ Gross luminous flux ambient lighting (Lm/m)	324
▪ Color ambient light	RGBW

Technical specifications

▪ Maximum power (W)	68
▪ Frequency (Hz)	50
▪ Power consumption in stand-by-mode (Ps) (W)	0
▪ Net weight (kg)	7
▪ Position electrical cable	Left/Right
▪ Length power supply cable (m)	4,5
▪ Safetyclass	II
▪ Voltage lighting (V)	230

