

CAMTREE

Gripper Car Suction Mount

C-G-10

INSTRUCTION MANUAL



All rights reserved.

No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the publisher.

INTRODUCTION

Our **CAMTREE Gripper G-10 Car Suction Mount** is a custom designed production tool that allows shooters to mount their DV/DSLR/Mirror Less cameras on most flat surfaces where handheld and fixed mount configurations are not possible. Using strong Industrial suction cups for positive load-bearing contact for cameras up to 6kgs, the Suction Mount adds the “Wow” factor to production value most evident in running footage on land, sea and air.

IN THE BOX

Please inspect the contents of your shipped package to ensure you have received all that is pictured and listed below.



Storage Case



Suction Cup Gripper



3 x 450mm Rods

4 x 300mm Rods



Suction Cup Dust Cover




6 x Universal Joint Clamp



3 x 110mm Rods



3 x Mounting Clamp With Pouch



Grey Plate with Febric



Cup Adapter



Camera Platform with 3 x 110mm Rods



Locking Adapter



Safety Cable



6 x Hex Knob



L-Type Allen key 4mm & 3/16"



4 x Bolts (1/4"X12)



3 x Bolts (1/4"X12)



4 x Washer

ASSEMBLING YOUR Gripper G-10 Car Suction Mount

- Select a surface position for your suction cup and lock it with the lever on it.



- Now loosen the knob on suction cup, then attach 110mm rod to it and retighten with same knob.



- Loosen the knob from joint clamp and attach it to 110mm rod.



- Then insert 450mm aluminum rod to joint clamp and tighten properly. Repeat this process for next 2 suction cups.

Note: If you want to set up on a shorter length, then you can use 300mm aluminum Rods.



- Attach joint clamp to Camera Platform with 3 x 110mm Rods. Using same approach, attach other joint clamps to camera platform tighten the knobs. Then attach 450mm rod setups to it.



- Now mount your camera onto it and secure it with locking adapter.



**A PROPER SET UP AND ATTACHED
CAMTREE GRIPPER G-10 SHOULD
LOOK LIKE THIS IMAGE.
CAMERA NOT INCLUDED IN PACKAGE.**



***Note - You can also assemble your
Camtree G-10 Gripper by using Cup
Adapter.***



Note - You can also assemble your Gripper G-10 by using mounting clamp. The clamp allows the gripper to be mounted to any square corner or rounded edge surface. Please Use following sequence of pictures and text as your assembly guide.

- Attach mounting clamp to your car door and tighten properly.



- Now remove one 450mm rod setup from joint clamp, then insert mounting clamp rod to joint clamp and tighten the knob to secure. Mount your camera onto it and secure with locking adapter.



Note - Fabric cloth gives the metal plate a non-slip and stable base. Keep this fabric cloth on any stable platform, for instance, the hard case, as shown in the images, and then you can show the metal plate setup on it.


- Put the fabric cloth on the hard case, as shown in the images.



- Insert the screws from the bottom of the plate into the threads and mount the camera platform on top.



- Securely tighten the screws with the help of 4mm Allen Key.

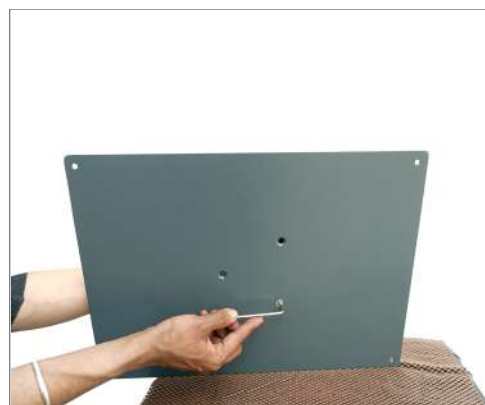


- Image showing the camera platform with 3x110mm rods secured adequately to the metal plate.



- Loosen the screw out of the locking adapter, insert it into the bottom thread of the 100mm flat fluid head and tighten it.



- Mount the flat fluid head on the camera platform and adequately secure the screw from the bottom using the locking adapter.

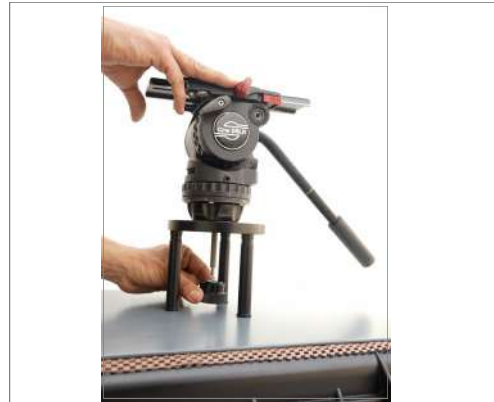

- Once the fluid head is secured, mount your camera on it. Finally, your setup is ready for use.



YOUR CAMTREE GRIPPER G-10 CAR SUCTION MOUNT ALL DRESSED UP AND READY TO GO!



(SHOWN WITH OPTIONAL ACCESSORIES)

Warranty: We offer one year warranty for our products from date of purchase. Within this period of time, we will repair it without charge for labor or parts. Warranty doesn't cover transportation costs nor does it cover a product subjected to misuse or accidental damage. Warranty repairs are subjected to inspection and evaluation by us.

Liability: We are not liable for damage caused by products that we do not supply or from mishandling in transit, accident, misuse, neglect, lack of care of the product, or service by anyone other than our company.

Contact Us: In case of any kind of dissatisfaction, please Contact us immediately and we promise our utmost support and care until you use our product.