

# CAMTREE Power Mount Gripper (G-PM)

## Assembly Manual



### ■ What's In The Box

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.



All rights reserved.

No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photo-copying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the Publisher.

## ■ Gripper Setup

- Suction cup mounts can be affixed to just about any smooth surface on any vehicle. With a few pumps of large pin on the side of each unit, suction mounts are good to go.



- Screw in the Ball Tilt Head on suction cups. Adjustable Ball Tilt Heads allow for an extensive range of lockable positions for Aluminium Rods.




- Three adjustable length legs screw into the adjustable locking ball tilt heads at top of the 3 suction cup mounts.



**NOTE:** Three rods are provided for each length - 3", 6" & 12". These rods can be linked together in any combination you need to create the perfect setup.

- Tighten the knob of Ball Tilt Head to lock the rods in a position.

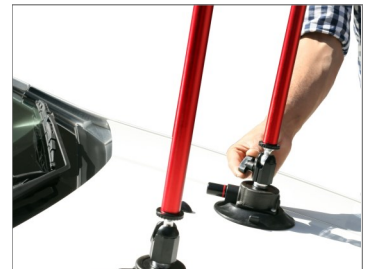

- Screw in camera mounting platform to Rods.



- Now fix both suction cup with metal loops on your vehicle.



- Attach one end of Rope with metal Hooks to camera mounting platform and another end to Metal loop of Suction cup. Tighten the Rope properly.




- Now loosen the four Allen bolts on Camera platform, align 100mm bowl with it.



- Re-insert the bolts and tighten with Allen key properly.



- Now mount your Fluid Head (**Not Included**) on 100mm Bowl Head. And then secure your camera set up on fluid head.

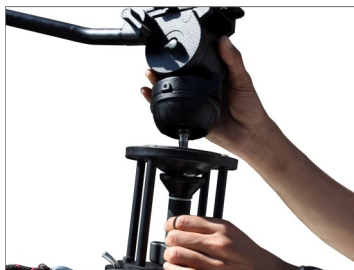

- To use Rope Hooks, press lever to loosen the rope. Remove metal hook from Metal loop of suction cups.



- Attach Rope Hooks to your vehicle, then attach metal hooks to Rope Hooks and tighten rope properly to secure your gripper.



- You can also attach your camera set up directly to camera mounting platform with provided screw.



- The Camera mounting platform of Power Mount Gripper has three leg attachment points that are each fitted with two positive locking ratchet joints, one for tilt and one for swivel. Each locking ratchet joint has a quick turn knurled lock ring for easy adjustment. You can unlock and lock each joint with a slight twist.
- To adjust tilt or swivel of each leg, first make sure lock ring on the appropriate joint is in the UNLOCK position, then adjust position of the leg as per need. And then turn lock ring back in the LOCK direction so that the camera won't shake from joint movement while the vehicle is in motion.

## Swivel Adjustments



## Tilt Adjustments



**YOUR CAMTREE POWER MOUNT GRIPPER  
ALL DRESSED UP AND READY TO GO!**



**(SHOWN WITH OPTIONAL ACCESSORIES)**

**Warranty:** We offer one year warranty for our products from date of purchase. Within this period of time, we will repair it without charge for labor or parts. Warranty doesn't cover transportation costs nor does it cover a product subjected to misuse or accidental damage. Warranty repairs are subjected to inspection and evaluation by us.

**Liability:** We are not liable for damage caused by products that we do not supply or from mishandling in transit, accident, misuse, neglect, lack of care of the product, or service by anyone other than our company.

**Contact Us:** In case of any kind of dissatisfaction, please Contact us immediately and we promise our utmost support and care until you use our product.