


# PR◊AIM 10' Wave-2 Jib Crane for Camer (P-WV-2PL)

## Assembly Manual



### ■ What's In The Box

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.

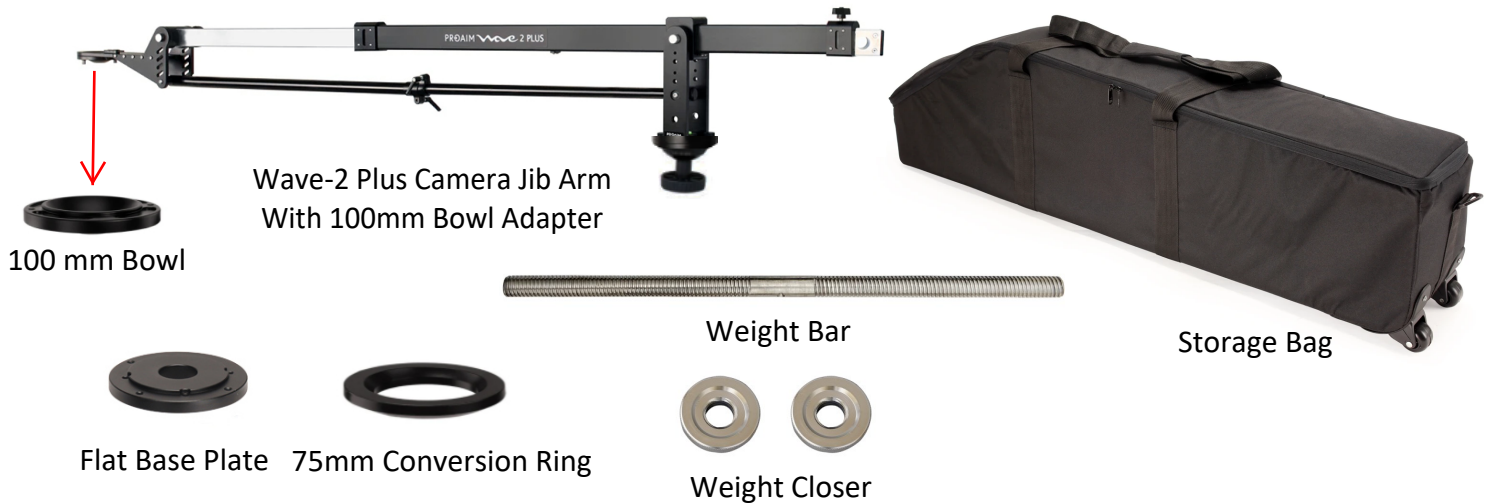

All rights reserved.

No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photo-copying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the Publisher.

## ■ Camera Jib Setup

- Mount the central fork of the Jib arm to the 100mm bowl mount tripod (**Not-Included**) and attach the bottom clamp for a secure connection.



**NOTE:** Ensure that the Central Fork is seated in the bowl properly, i.e., perpendicular to the tripod bowl. Off-axis installation may hamper the jib movement. Also, you may need a grip stand to hold the camera end of the arm during structure, preventing it from falling as it will be front-heavy. You may also require the grip stand or assistance at the rear of the jib when mounting the camera.

**NOTE:** Tripod Stand is Not Included.

- Unscrew the knob present on the back portion of the jib. Extend the jib arm length backwards. Retighten the knob to secure properly.



- Insert weight rod into the jib arm. Slide in the counterweights (**Not-Included**) as per your requirement. Screw in the weight closer appropriately



- Loosen the knobs of the Jib arm, extend the front telescopic post as per your requirement and tighten all knobs to secure.



## Camera Mounting Setup

- Mount your fluid head (**Not Included**) onto the 100mm bowl plate attached to the jib camera mount and secure it with a locking adapter. Then, remove the tripod plate from it.



- Securely attach tripod plate to the camera (**Not Included**). Now mount the camera setup onto the fluid head (**Not Included**) and secure it with the help of a provided knob.



- Loosen the bolts and remove the 100mm bowl.



- For an under-slung setup, attach the flat base plate to the bottom of the camera mount. Mount the camera setup, and secure the camera (**Not Included**) properly.



## Lcd Mounting Setup

- **LCD Mounting:** Attach your LCD Mounting Arm to Jib Fork and secure it properly. Screw-in LCD (**Not Included**) to arm and tighten its knob after positioning the angle of LCD Arm.



## Balancing Tips :

<b>Camera Weight</b>	1kg	2kg	3kg	4kg	5kg
<b>Counter Balance</b>	2kg	4kg	6kg	8kg	10kg

**YOUR PROAIM 10' WAVE-2 JIB CRANE FOR CAMERA  
ALL DRESSED UP AND READY TO GO!**



**(SHOWN WITH OPTIONAL ACCESSORIES)**

**Warranty:** We offer one year warranty for our products from date of purchase. Within this period of time, we will repair it without charge for labor or parts. Warranty doesn't cover transportation costs nor does it cover a product subjected to misuse or accidental damage. Warranty repairs are subjected to inspection and evaluation by us.

**Liability:** We are not liable for damage caused by products that we do not supply or from mishandling in transit, accident, misuse, neglect, lack of care of the product, or service by anyone other than our company.

**Contact Us:** In case of any kind of dissatisfaction, please Contact us immediately and we promise our utmost support and care until you use our product.