

PROAIM 100mm Bowl Head Tripod Stand With Rubber Tripod Shoes (P-TP-100-B)

Assembly Manual



■ What's In The Box

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.



100mm bowl Tripod Stand



3 x Proaim Rubber Tripod Shoes



Bag Packing

All rights reserved.

No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photo-copying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the Publisher.

■ Tripod Stand Setup

- Properly spread and open all the legs of the tripod stand.



- Then, spread the Mid-Level Spreader of the tripod according to your requirements and secure properly with the help of the provided knobs.



- Attach a rubber tripod shoe to the bottom legs of the stand. Then, pull the rubber tripod shoe grips & secure it.




- Follow the same above process to attach the remaining Rubber Tripod Shoes.

NOTE: its feet have quick "on-off", rubber grip shoes which are custom-made to stabilize and strengthen the tripod.



- To adjust the height of the tripod, loosen all three adjustment knobs. You can adjust the tripod up to the desired height and then re-tighten the knobs securely.

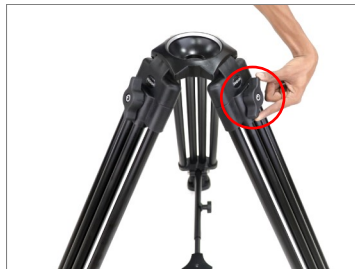

NOTE: Tripod is an extremely stable platform with an incredible height range of 31"-53". Equipped with quick horizontal locking knobs, the tripod legs offer easy functionality and secure height adjustments.



- Remove the knob of the 100mm Bowl Fluid Head (**Not Included**) and mount it on the Tripod Stand.



- Then, properly tighten and secure the knob of the Fluid Head (**Not Included**) from the bottom.



- Pull and release the Fluid Head knob and then remove the camera plate.



- Then, after removing the camera plate, attach it to the bottom side of the Camera (**Not Included**).



- After attaching the camera plate to the camera (**Not Included**), secure it with the help of a screwdriver. Pull the knob of the fluid head, then mount the camera (**Not Included**), as shown in the image.



- To secure the camera (**Not Included**), pull and tighten the knob of the Fluid Head.

NOTE: Precisely engineered with High-Grade CNC Aluminum, it is solid and easily accommodates a payload of up to 80kg /176lb at minimum height & 25kg / 55lb at maximum.



**YOUR PROAIM 100MM BOWL HEAD TRIPOD STAND WITH RUBBER TRIPOD SHOES
ALL DRESSED UP AND READY TO GO!**



(SHOWN WITH OPTIONAL ACCESSORIES)

Warranty: We offer one year warranty for our products from date of purchase. Within this period of time, we will repair it without charge for labor or parts. Warranty doesn't cover transportation costs nor does it cover a product subjected to misuse or accidental damage. Warranty repairs are subjected to inspection and evaluation by us.

Liability: We are not liable for damage caused by products that we do not supply or from mishandling in transit, accident, misuse, neglect, lack of care of the product, or service by anyone other than our company.

Contact Us: In case of any kind of dissatisfaction, please Contact us immediately and we promise our utmost support and care until you use our product.