



12ft Camera Crane Jib Arm (P-12)

Instruction Manual

PROAIM
└ CINEMA SERIES ┘

At Proaim, our goal is to ensure 100% Customer Satisfaction in all that we do.

We back our sales with a 1 year warranty from the date of purchase and work hard to resolve any problems in the unlikely event one should arise.

With our commitment to continuous improvement and your Feedback, building on our reputation of providing affordable, quality products is

PRIORITY #1.

■ Table of Contents

Subject	Page
Foreword	3
Introduction	4
Assembling	5-9
Warranty	10

■ Welcome To Proaim!

Dear Client,

On behalf of all the people that work so hard to provide you with the most up-to-date, flexible and cost-efficient production gear, we would like to welcome you into the Proaim family.

By purchasing your Proaim 12ft Jib Arm with Jib Stand, you have just joined a host of designers, engineers, machinists, assembly, customer service and office staff that take great pride in all that they do. Our mantra of continuous improvement has been the guiding principle of how we conduct our business since day one.

Once you have the opportunity to experience your new Proaim 12ft Jib Arm with Jib Stand, we hope you will agree that we craft quality products at a competitive price. Products designed to meet and exceed the standards of today's real production world.

Standards set by our valued clients and standards we strive to maintain.

With Best Wishes,

Proaim Team

■ Introduction

PROAIM comes forward with its creative 12ft Jib arm, a versatile tool that allows you to smoothly boom your camera up and down for stable and fluid sweeping shots in an infinite number of 360 degree arcs. The Aluminium constructed, ribbed sections camera crane makes it surprisingly vigorous to use with your DSLR DV HDV modern Cameras. Expertly drafted Ribbed Jib arm have ultra-smooth, high-capacity camera case platform for perfect stabilized shots. Comes with robust and heavy duty tripod stand for stability. Unique Swivel System allows smooth slides & avoids disturbing swings during movement. Exclusively designed to fit in tight spaces or be raised up for taller ceilings, getting you amazing overhead shots. Manufactured of scratch-resistant, powder coated and anodized aluminum to incorporate the years of flawless use.

■ What's In The Box

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.



Front Section



Middle Section



End Section



LCD Monitor Arm



Central Post



Weight Closers



Weight Shank



Tool Pouch



Storage Bag

■ Assembling The Jib Arm

- Slide the Center Post of the Jib onto the Stand (Not Included) Mount and tighten the knob to secure it.



Connect The 2nd Jib Section To The Center Post

- Open the shank from the central post.
Leave the black washers at one side.



- Then insert the end of this section inside the Center Post and align the holes of the section with the central post to screw in the shank.



- Similarly, insert the black washers onto the other side and push the shank towards the other side in order to tighten the shank with the dome nut.





- Use Wrench tool to tighten the dome nut from both sides to secure the Jib Sections.



Connecting Arm Sections Middle With Front and Middle With End

- The Middle section has connecting bars attached to both the ends. Slide the bars of Middle section into the slots on Front section & tighten both the sections together using the provided Allen Key.

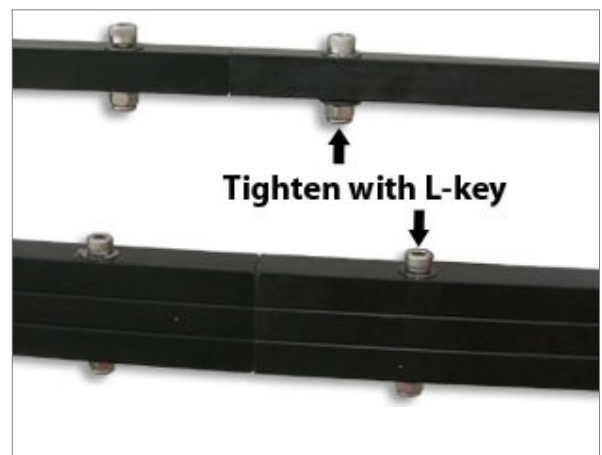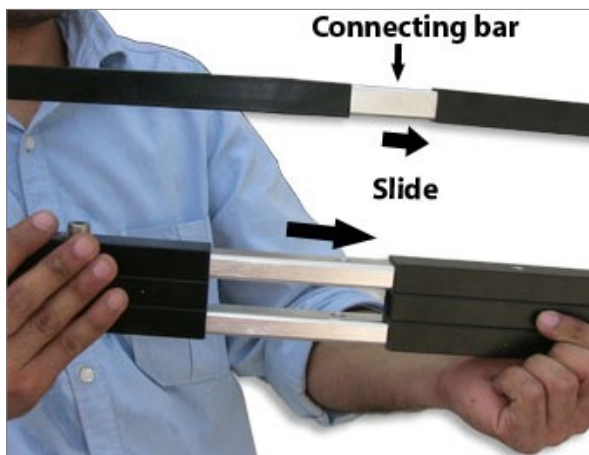

- Tighten the wire puller and its central pool adapter. Tighten the bolts to secure them.



Adjusting The Wire Tensioner

- To add strength and stability to your Jib and allow for maximum weight carrying, the fore and aft wire ends once positioned need to have the slack taken out by use of the wire adjuster shown above. Once connected in line with the wire, simply rotate the mid section handle to tighten the wire adding the required amount of strength to the system.



Adding The Counter Weights

- Securing the counter weights to the Jib is accomplished by the use of the stainless steel shank. It has two lock offs, one for each side of the Arm to prevent the weights from shifting during use or accidentally falling off the jib.
- Standard exercise weights (not supplied) with a 1' hole are easily rig mountable and are used to equal the weight placed on the camera side of the Jib.

- Once you discover correct balance, consider marking the weights for that particular camera facilitating an easier set up the next time.



Weights shown in the image are for demonstration

Camera Mounting Plate

- To accommodate various manufacturers and different sized cameras, multiple slots are provided for attachment.

- You will need to fine tune your counterweights to accommodate camera, head and other accessories being used on the Jib Arm.



- If you are using the remote capability of a Pan/Tilt Head, it can be easily mounted to the jib via the 4 slots located at the corners of the plate using 4 screws.
- This assembly is usually accomplished from the underside (bottom) of the jib camera plate.



YOUR PROAIM 12FT CAMERA CRANE JIB ARM ALL DRESSED UP AND READY TO GO!



(SHOWN WITH OPTIONAL ACCESSORIES)

WARRANTY

We offer a one year warranty for our products from the date of purchase.

We will repair or replace your product, free of charge, in the event of a defect in materials or craftsmanship obtained during normal use or handling based on the user manual. Please note that we will not cover any shipping costs for returning the product to us. If any VAT or import duties are applied to the return, we will also charge these costs to the customer.

The warranty does not include, by the way of example, damage caused by products that we do not supply or from mishandling in transit, accident, misuse, neglect, lack of care of the product , or service by anyone other than our company.

We are not liable for incidental or consequential damages resulting from the use of the unit or occurring due to any breach of this warranty.

Replacement parts of the product will be provided at nominal cost (covering the cost price of the replacement parts only) to the customers after the Warranty Period has expired. We will cover

the complete cost of sending replacement parts within the warranty period. After that, Nominal cost of the product & Actual shipping cost will be charged.

Do not send the unit to us without first getting a response and getting the approval to send back the item.

In case of any kind of dissatisfaction, we urge you to Contact us immediately and we shall do our Best to help you out. For any other assistance you can reach us via email.

For any other assistance you can reach us via email.