

# PR◊AIM 18ft Camera Crane Jib with Stand (P-18-JS)

## Assembly Manual



### What's In The Box

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.



All rights reserved.

No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photo-copying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the Publisher.





## Jib Stand Setup

- Slide Central Post of Jib onto the Jib Stand and tighten knob-2 to secure it.
- Open shank from central post. Leave the black washers at one side help of wrench.





## Jib Sections Setup


- Insert the section 4 inside central post then Align holes of section with central post to screw in the shank back.
- Then tighten the bolt properly with the help of a wrench, and to attach section 5 to 4, loosen the bolt from section 4.
- Section-5 has connecting bars attached with section-4 on both ends and then tighten them together using provided Allen key.
- Continue the Arm build by sliding in section 3 onto section 4 as shown in the image.

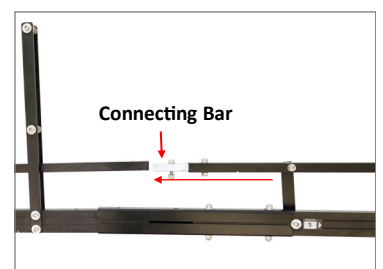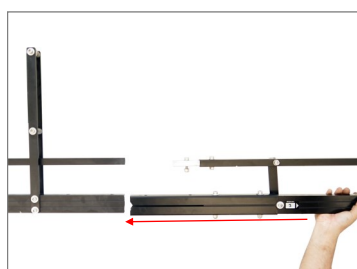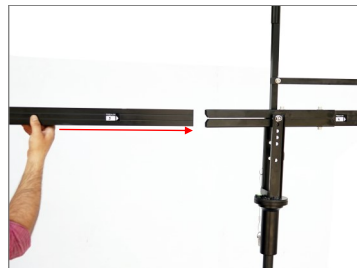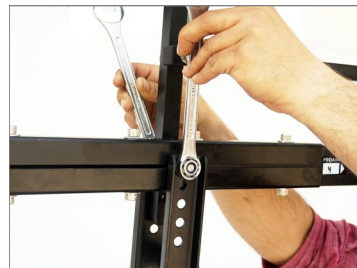



- Loosen the bolt from the connecting bar with the help of a 6mm Allen key and wrench, then insert the bolt using the holes provided.

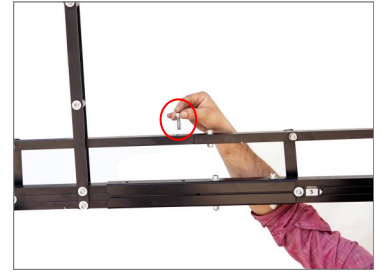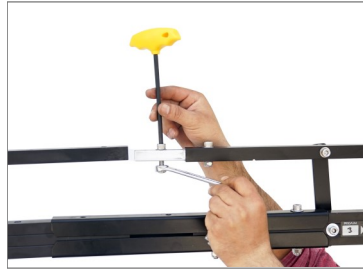

- Then tighten them together using provided Allen key and wrench as shown in the image.

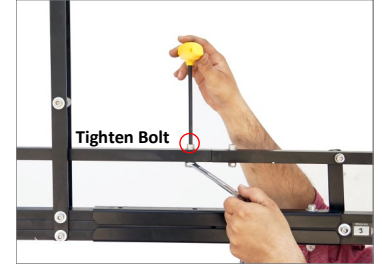

- Continue the Arm build by sliding in section 2 onto section 3, and finally section 1 onto section 2.

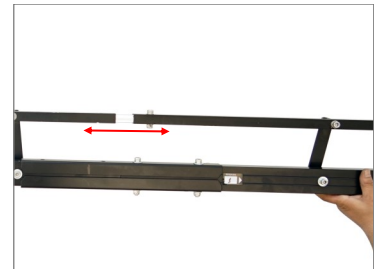
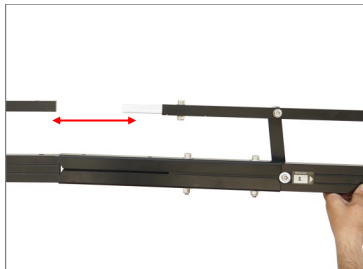


- Then tighten them together using provided Allen key as shown in the image.


**Note:** The Jib Stand supports an incredible payload of up to 90kg and is highly stable in use.



- Connect the Wire/Cable Tensioner with cable. Simply rotate the mid-section handle to tighten the cable adding required amount of strength to the system.

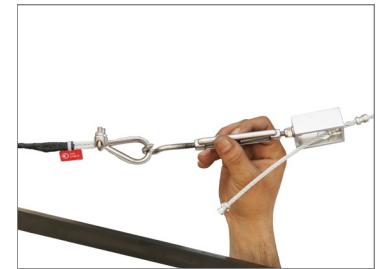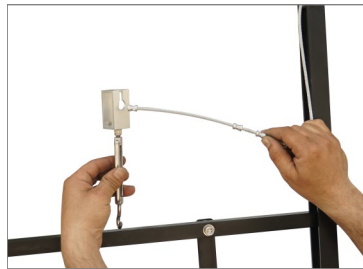

- Insert the weight rods into section 5, and then secure them to the weights with 1" holes.

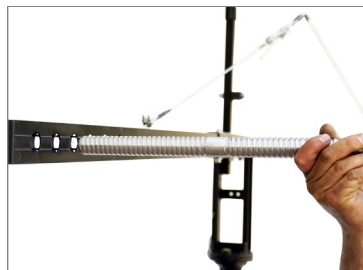



- Secure your camera setup with weight closers as shown.

**Note:** Once you discover correct balance, consider marking the weights for that particular camera; facilitating an easier set up the next time.




- Lock the pin for keeping your camera in a fixed angle to take stable shots.

**Note:** The Jib has many great features such as a two-arm design, camera mount tilt control, ribbed jib sections & monitor mounting.

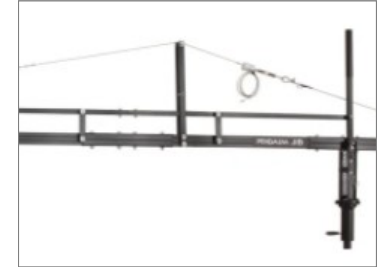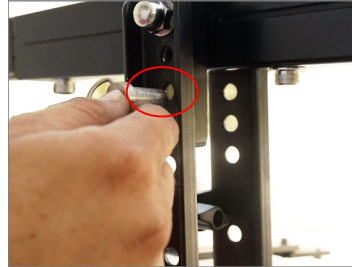


- Attach LCD mounting arm onto central fork then tighten the knob.

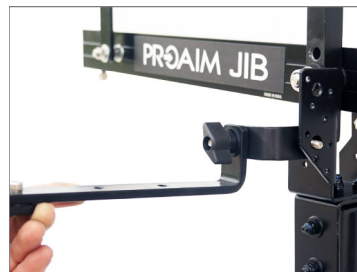

**Note:** The Central fork has provision to attach LCD Monitor (Not Included) via LCD Mounting Arm.




### Fits in Almost Any Location Different Shooting Lengths

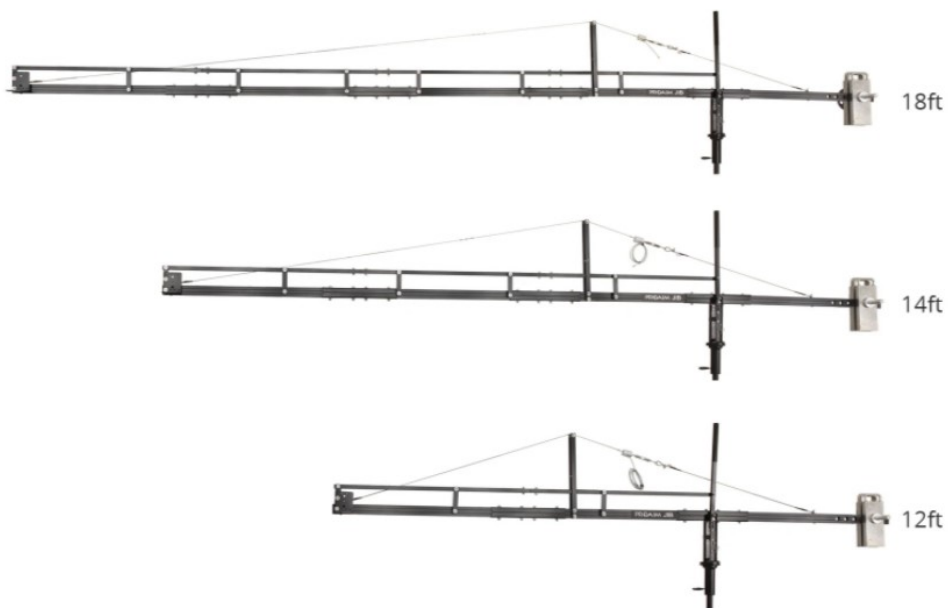

**Note:** You can adjust the arm length from 18 feet to 14 feet and 12 feet by quickly removing the jib section. The ability to change the length allows you to use the crane in a variety of scenarios.

**Note:** The jib adapts to 3-axis gimbal, pan tilt and fluid head. The Jib has Universal front mounting to adapt Pan Tilt Heads and 3-Axis Gimbal Stabilizers. Camera Mount Tilt Control offers both Auto tilt mode and a Manual tilt mode with a control handle.



**YOUR PROAIM 18ft CAMERA CRANE JIB WITH STAND  
ALL DRESSED UP AND READY TO GO!**



**(SHOWN WITH OPTIONAL ACCESSORIES)**

**Warranty:** We offer one year warranty for our products from date of purchase. Within this period of time, we will repair it without charge for labor or parts. Warranty doesn't cover transportation costs nor does it cover a product subjected to misuse or accidental damage. Warranty repairs are subjected to inspection and evaluation by us.

**Liability:** We are not liable for damage caused by products that we do not supply or from mishandling in transit, accident, misuse, neglect, lack of care of the product, or service by anyone other than our company.

**Contact Us:** In case of any kind of dissatisfaction, please Contact us immediately and we promise our utmost support and care until you use our product.