

## Assembly Manual



### ■ What's In The Box

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.



4-Way Leveler



Mitchell Castle Ring



Castle Nut Wrench



5mm Allen key

---

All rights reserved.

No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photo-copying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the Publisher.

## 4-Way Camera Leveller with Bazooka Setup

- Loosen the ratchet knob of the 4-Way Leveler and mount it over the bazooka (Not Included).



- Mount the 4-way Leveler on top of the bazooka and securely tighten it using the leveler knob.



**NOTE:** The Leveler can tilt up to an angle of 7°. The Anti-Slip 4 Levelling Knobs assist in micro-levelling of the camera setup. Possibility of swiveling and Quick-Lock mechanism offers quick, easy and secure assembly.



- You can loosen the unlocking knob to rotate/swivel the Leveler, as shown in the image.



## 4-Way Camera Leveller with Offset Setup

- Loosen the Leveler knob and open it.



- Remove the Mitchell Castle ring by loosening it using 5mm Allen Key.




- Remove Castle Nut from the Castle Ring.



- Then remove the bolts of the Castle Nut using the 5mm Allen key.



- Attach the Castle Nut to the Leveler ensuring the holes align with the bottom thread of the Leveler.

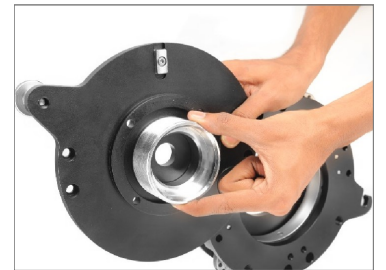

- Insert the bolts and secure them using the 5mm Allen key.




- Castle Nut is now securely attached to the Leveler.



- Loosen the ratchet knob of the offset **(Not Included)** to mount it over the bazooka and then securely tighten the ratchet knob.



- Place the Leveler over the offset and then securely tighten it using the Castle ring.

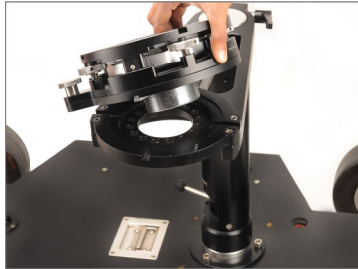

- Manually tighten it with the Castle Nut Wrench, as shown in the image.

**NOTE:** Perfectly suited with Mitchell/Euro risers, tripods, bazooka, dollies, cranes, etc.



## Fluid Head Mounting

- Loosen the Castle ring of the Mitchell Fluid head and remove it **(Not Included)**.



- Mount the Fluid head **(Not Included)** on the leveler.



- After mounting the Fluid Head, tighten the castle ring from bottom .




- Remove the plate by pushing the knob of the Fluid head.



## Camera Mounting


- Attach the fluid head plate with the base plate located at the bottom of the camera (Not Included) ensuring the holes align and then securely tighten it using a screw driver (Not Included).

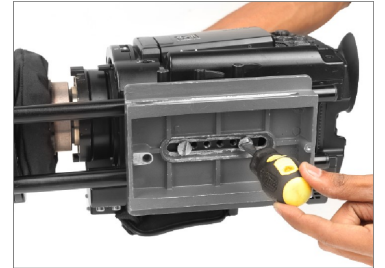

- Slide the camera on the Fluid head.



- Manually tighten the Fluid head knob, as shown in the image.

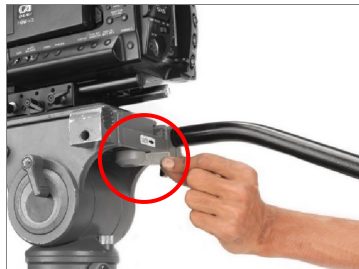

- Now the camera is securely attached to the Fluid head.



**YOUR PROAIM 4-WAY CAMERA LEVELLER  
ALL DRESSED UP AND READY TO GO!**



**(SHOWN WITH OPTIONAL ACCESSORIES)**

**Warranty:** We offer one year warranty for our products from date of purchase. Within this period of time, we will repair it without charge for labor or parts. Warranty doesn't cover transportation costs nor does it cover a product subjected to misuse or accidental damage. Warranty repairs are subjected to inspection and evaluation by us.

**Liability:** We are not liable for damage caused by products that we do not supply or from mishandling in transit, accident, misuse, neglect, lack of care of the product, or service by anyone other than our company.

**Contact Us:** In case of any kind of dissatisfaction, please Contact us immediately and we promise our utmost support and care until you use our product.