

Action-King 8" Suction Mount Car Camera Rigging System (CM-ACKG-02)

Assembly Manual



What's In The Box

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.



2x 8" Suction Cup



5 x 360° Rotating Speed Rail Clamp



2 x Washer



3 x 6" pipe with 48mm OD



2x Safety Straps



Bolt and 5mm Allen Key



Flight Case

All rights reserved.

No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photo-copying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the Publisher.

- Press the hidden button on the bumper panel in the front of the vehicle, and remove it, as shown in the image.



- Insert a toe hook (Not included) into the hidden panel and tighten it correctly. **NOTE:** The toe hook's purpose is to help you set up your setup easily.



■ 6" pipe with 360° Rail Clamp Setup

- Loosen and remove the washer from the 6" pipe quickly with the help of a 5mm Allen key.



- Now, place one washer on the top of the toe hook such that their holes align with each other. Screw in the other washer from the bottom.



- Insert the washer screw into the 6" pipe, then tighten them properly with the help of a 5mm Allen key.



- Now, loosen the 360° rotating speed rail clamp and attach one end to the 6" pipe.



- Insert the rod (**Not Included**) into the other end of the speed rail clamp and tighten it correctly with the help of a 5mm Allen key.



■ Suction Cup Setup

To guarantee proper adhesion of suction cups, check that the cup surfaces & mounting surface is clean, dry & dust-free. Please mount it on smooth, even & non-porous surfaces.

- Place your suction cup in the selected position on the car surface. Next, press the suction pump to create a vacuum between the suction cup and the car surface. Finally, release the pump to mount the suction cup properly.




- Insert the 6" pipe on the suction cup into one end of the 360° rotating speed rail clamp. Then, insert a rod (**Not included**) into the other end of the clamp.



- After inserting the rod, tighten the clamp properly with the help of a 5mm Allen key.



- Although the suction cup holding force is adequate for regular driving shots, you must use safety belts/tension straps for additional security. When mounted on cars, properly secure the objects attached to the suction cup (e.g. camera, gimbal, etc.). Use rubber sleeves to avoid dents and scratches on car paint. Tighten safety straps carefully to prevent damages.

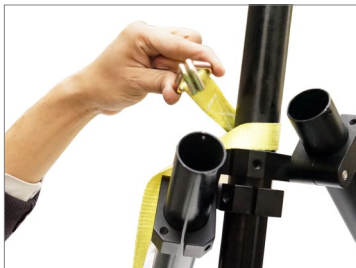

- Your setup is ready to use.

NOTE: Test all fixtures before driving .



YOUR PROAIM ACTION-KING 8" SUCTION MOUNT CAR CAMERA RIGGING SYSTEM ALL DRESSED UP AND READY TO GO!



(SHOWN WITH OPTIONAL ACCESSORIES)

Warranty: We offer one year warranty for our products from date of purchase. Within this period of time, we will repair it without charge for labor or parts. Warranty doesn't cover transportation costs nor does it cover a product subjected to misuse or accidental damage. Warranty repairs are subjected to inspection and evaluation by us.

Liability: We are not liable for damage caused by products that we do not supply or from mishandling in transit, accident, misuse, neglect, lack of care of the product, or service by anyone other than our company.

Contact Us: In case of any kind of dissatisfaction, please Contact us immediately and we promise our utmost support and care until you use our product.