

PR◀AIM Astra 4ft Camera Jib Crane with jib Stand (JB-AS04-TS)

Assembly Manual



■ What's In The Box

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.



4ft Jib – comes with
Camera Mount Plate



LCD Mounting Bracket



Vertical Counter
weight Bar



Bag Packing



Jib Stand



Tightening knob

All rights reserved.

No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photo-copying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the Publisher.

Astra Jib Setup


1. Using tripod head

- Remove the quick release plate from the tripod head. Screw into the crane's mount, located on the rear section. 1/4"-20 & 3/8"-16 threads available. Do not attempt to use the tilt function on the fluid head with the crane attached.



2. Using crane stand

- With the stand mount attached to the crane, set it on top of the stand's main shaft and tighten the knob to secure it.

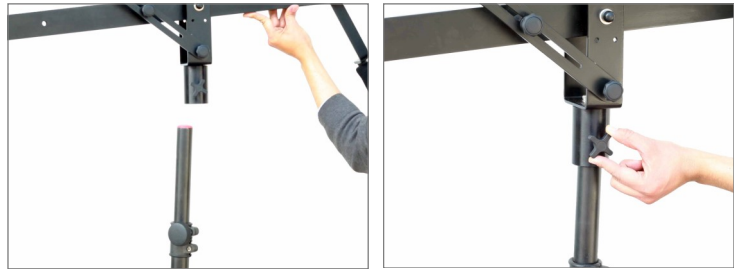

Now that the crane's rear section is mounted securely to support stand, it is time to connect the Camera setup to the camera plate.

Camera Setup

- At this point, the crane will be front heavy. Allow it to rest on the ground. Attach extension plate by using the provided screw. Now, attach the camera to the extension plate by using 1/4"-20 universal sized screw; it will thread from the bottom of the camera. Properly secure your camera.



Camera mount with fluid head

- Firstly you will need to attach the BS-100 screw with your fluid head then attach the fluid head with your camera plate.



- Secure your camera properly as shown.



Mounting Counterweights


- After the camera is mounted, it is safe to add counterweights to bring the crane into balance. First, attach the bar that the counterweights will be placed on. Connect the vertical counterweight bar to the bolt.



NOTE: When the proper amount of counterweight has been added, the crane will rest in a horizontal position. Motions will be smooth and effortless. Note, the type of camera and mounting position will affect the balance. If the mounted camera is front heavy then mount the vertical bar in the first hole.

Manual Tilt Mode


- Manual tilt mode is achieved by loosening the knob & removing the pin at the top of the stand mount. Now the handle can be used to tilt the camera independently from the crane's body.

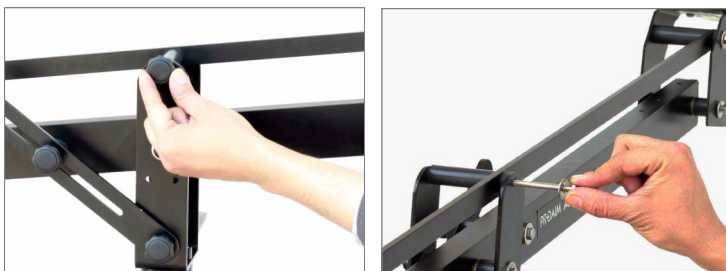


Below is the manual tilt functionality of the camera.

WARNING: when tilting manually, always maintain control of the camera. A front heavy camera may Move forward abruptly without notice.


1. For straight angle

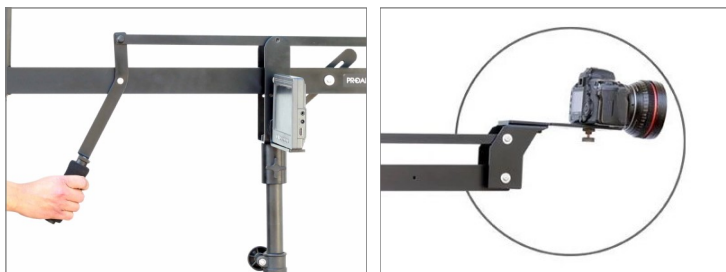

2. For upper angle

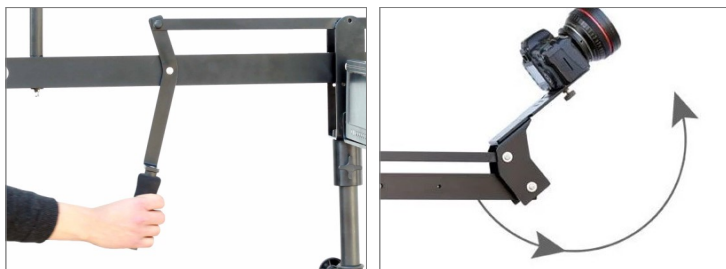


3. For lower angle

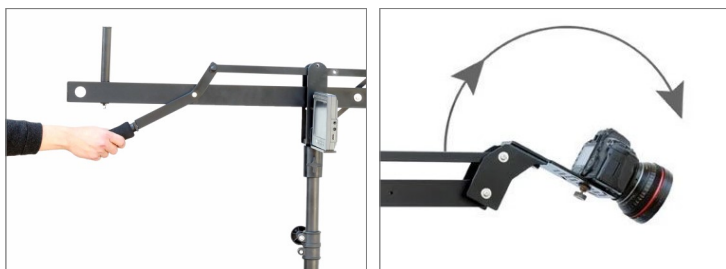

Optional Tilt Brake

- For using tilt function, loosen the knob to tilt the crane to the desired position. Tighten back the knob if you want to put a brake to tilt feature.

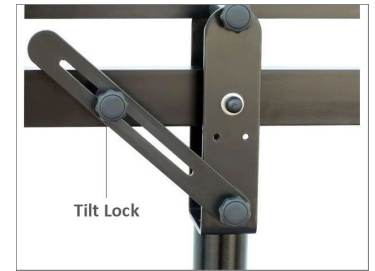

Monitor Mounting Bracket

- To attach the monitor bracket, screw the knob into the threaded hole on the crane's tripod mount.



YOUR PROAIM ASTRA 4FT CAMERA JIB CRANE WITH JIB STAND ALL DRESSED UP AND READY TO GO!



(SHOWN WITH OPTIONAL ACCESSORIES)

Warranty: We offer one year warranty for our products from date of purchase. Within this period of time, we will repair it without charge for labor or parts. Warranty doesn't cover transportation costs nor does it cover a product subjected to misuse or accidental damage. Warranty repairs are subjected to inspection and evaluation by us.

Liability: We are not liable for damage caused by products that we do not supply or from mishandling in transit, accident, misuse, neglect, lack of care of the product, or service by anyone other than our company.

Contact Us: In case of any kind of dissatisfaction, please Contact us immediately and we promise our utmost support and care until you use our product.