


Cyrus Camera Vibration Isolator (VI-CYRS-01)

Assembly Manual



What's In The Box

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.

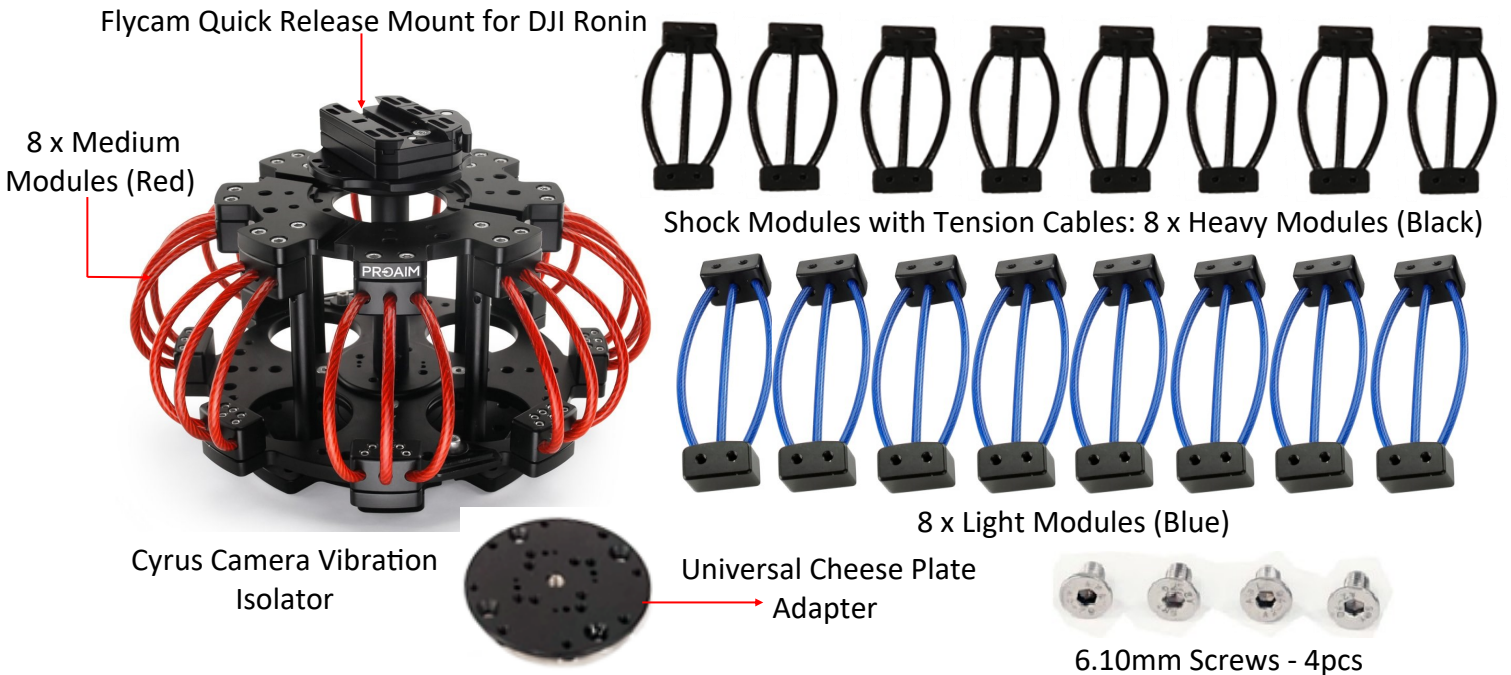

All rights reserved.

No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photo-copying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the Publisher.

Cyrus Vibration Isolator Setup

- Loosen the bolts of the Ronin mounting plate using an Allen key and remove the plate from the Cyrus Camera Vibration Isolator.



- Detach the bottom part of the Freefly-MOVI Mount (Not included) and place it on the top of the Cyrus Camera Vibration Isolator.



- Insert the four bolts into the bottom part of the Freefly-MOVI Mount (Not included), then place that bottom part on the top of Cyrus Camera Vibration Isolator.




- Secure the bottom part of the Freefly-MOVI Mount (Not included) properly with an allen key and then attach the top part of the Freefly-MOVI mount to it.



- Securely lock the Freefly-MOVI Mount (Not included) to the top of the Cyrus camera vibration isolator.

NOTE: You can easily mount Ronin Gimbal (Not included) on Freefly-MOVI Mount (Not included). Cyrus Camera Vibration Isolator easily handles large Remote Pan Tilt heads and Gimbal systems like the DJI Ronin or Freefly MōVI.

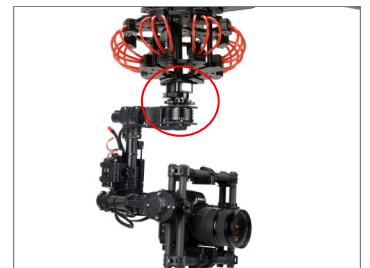

- Mount the L-plate (Not included) on the bottom view of the Cyrus camera vibration isolator. Tighten the bolt with an allen key.

NOTE: You can also mount the Ronin Gimbal (Not included) on the L-plate (Not included).



- Loosen the bolt using an allen key to remove the red cable from the top view of the Cyrus camera vibration isolator.

NOTE: RED Medium Duty/Standard: Compatible RED, Canon C300, heavy DSLRs with Cine primes with a gimbal like MoVI M5/M10/M15/Pro, Ronin/Ronin M/Ronin MX.

- Attach the Light Modules blue cable on the top view & bottom view with the help of an allen key.

NOTE: You can interchange the wires according to the payload requirement.

- Follow the same process to attach the other Light Modules blue cables.

NOTE: Blue Light Duty: Compatible with DSLR, smaller digital cine cameras or hard-mounted cameras without a gimbal.


- Again, following the same process, replace the blue cables with black cables with the help of an allen key.

NOTE: Black Heavy Duty: compatible with Red, Alexa Mini, Ursa Mini Pro, Phantom Flex, etc. Package with cine zoom, heavy primes and larger gimbals like MoVI XL or Ronin 2.

- Pull down the Ronin mounting plate (DJI-QR) lever to secure your gimbal setup.

- Now you can mount your camera on a gimbal.

NOTE: Cyrus Camera Vibration Isolator easily mounts on Mitchell Tripods, Cranes, Jibs, Sliders, Shock Absorber Arms and Dolly Systems. Mount it to any Camera Gimbal Setup ranging from 5-50kg, and it'll function precisely the way you need it.

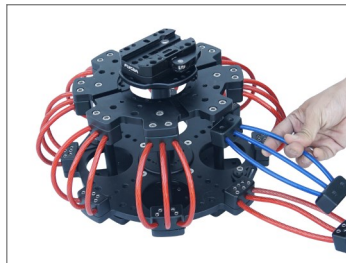

YOUR PROAIM CYRUS CAMERA VIBRATION ISOLATOR ALL DRESSED UP AND READY TO GO!



(SHOWN WITH OPTIONAL ACCESSORIES)

Warranty: We offer one year warranty for our products from date of purchase. Within this period of time, we will repair it without charge for labor or parts. Warranty doesn't cover transportation costs nor does it cover a product subjected to misuse or accidental damage. Warranty repairs are subjected to inspection and evaluation by us.

Liability: We are not liable for damage caused by products that we do not supply or from mishandling in transit, accident, misuse, neglect, lack of care of the product, or service by anyone other than our company.

Contact Us: In case of any kind of dissatisfaction, please Contact us immediately and we promise our utmost support and care until you use our product.