

Flying PRO 3ft Mitchell Video Camera Slider for Videomakers (SL-FLPR-3)

Assembly Manual



What's In The Box

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.



Proaim Flying Pro Slider 4ft with Mitchell Key



Bag Packing

All rights reserved.


No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photo-copying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the Publisher.

Flying PRO 3ft Mitchell Slider Setup

- Loosen the castle ring present at the backside of the Mitchell Slider using a castle wrench.



- After loosening the castle ring, remove it from the Mitchell slider.

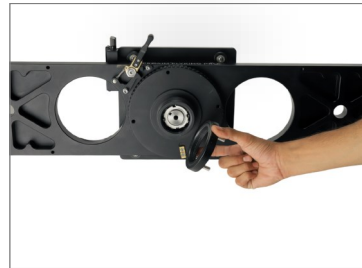

- Mount the Mitchell slider on a Mitchell stand (Not Included), as shown in the image.



- The Mitchell Slider is successfully mounted on the Mitchell stand (Not Included).



- After mounting the slider, re-insert the castle ring from the bottom of the slider.
- Now, tighten the castle ring using a castle wrench.




- The castle ring has been properly attached to the slider, ensuring a secure attachment between the slider and the Mitchell stand (Not Included).



- The lever of the Mitchell Slider can be used to move it in a panning move per your requirement.



NOTE: It provides a full 360° sweeping pan with an easy-to-use lever that safely locks the carriage in your desired position.

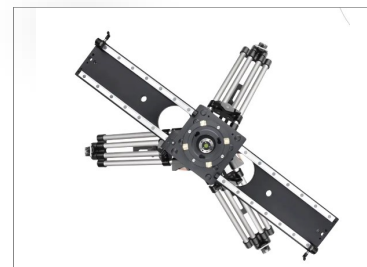

- Loosen the magnetic stoppers and move them to the desired position.

NOTE: Adjust the rail length per your shooting requirement by setting the magnetic stoppers at the desired length.



- Position the magnetic stopper anywhere on the rail and secure the position by flipping the knob.

NOTE: The slider is equipped with adjustable magnetic stoppers that minimize the jarring caused by sudden slide stops during gliding shots, ensuring a smooth, jerk-free finish.




- Loosen and remove the castle ring of the Fluid head (Not Included).



- Mount the Fluid head (Not Included) on the Mitchell slider.



- After mounting the Mitchell fluid head (**Not Included**), tighten the castle ring from the bottom to secure the Fluid head.

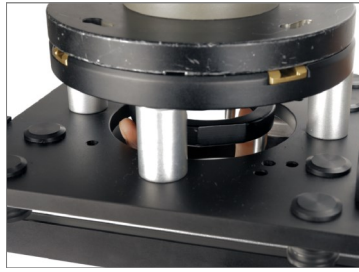

- Press the knob of the Fluid head and release the top plate.



- Attach the top plate of the fluid head with the Camera (**Not Included**) by matching their threads and secure them using a screwdriver.



- Slide the Camera (**Not Included**) onto the Fluid head.



- After mounting the Camera, press the locking lever of the fluid head to lock the attachment.



- Loosen the knob of the Mitchell plate of the slider and move the plate per your requirement.



- You can firmly lock the position of the Mitchell plate using the knob, as shown in the image.



NOTE: With a minimum working height of 13cm, the slider lets users capture shots from a relatively lower angle.



Features: The Slider features a stronger-than-ever braking system with adjustable magnetic stoppers that minimize the jarring caused by sudden slide stops during gliding shots, ensuring a smooth, jerk-free finish.

- The Slider is ready to use.



YOUR PROAIM FLYKING PRO 3FT MITCHELL VIDEO CAMERA SLIDER ALL DRESSED UP AND READY TO GO!



(SHOWN WITH OPTIONAL ACCESSORIES)

Warranty: We offer one year warranty for our products from date of purchase. Within this period of time, we will repair it without charge for labor or parts. Warranty doesn't cover transportation costs nor does it cover a product subjected to misuse or accidental damage. Warranty repairs are subjected to inspection and evaluation by us.

Liability: We are not liable for damage caused by products that we do not supply or from mishandling in transit, accident, misuse, neglect, lack of care of the product, or service by anyone other than our company.

Contact Us: In case of any kind of dissatisfaction, please Contact us immediately and we promise our utmost support and care until you use our product.