

Assembly Manual



■ What's In The Box

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.



Jacket



2 x Bungee Rubber Straps



1 x T-Type Allen key
(Size: 5mm)



Shoulder Strap




Bag Packing

All rights reserved.

No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photo-copying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the Publisher.

Hawk Lite Body Support Rig Setup


- Wear the jacket and buckle up from the waist.

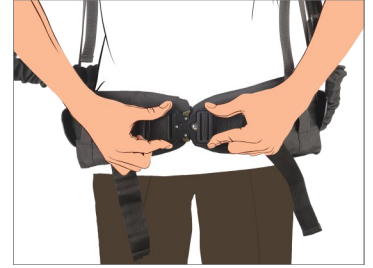

- Loosen or tighten the adjustable straps around the waist according to your comfort, as shown in the image.



- Now, loosen or tighten the adjustable straps around the chest according to your comfort, as shown in the image.

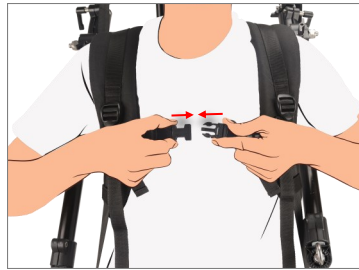


- Use the strap to properly adjust the chest Velcro.





- Attach the Bungee rubber straps with the hook present at the back of the jacket, as shown in the image.

NOTE: The bungee rubber strap is the connector between the arm and the back rod.

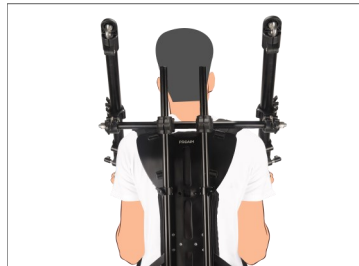


- Now, secure the bungee rubber strap and hook by locking them.

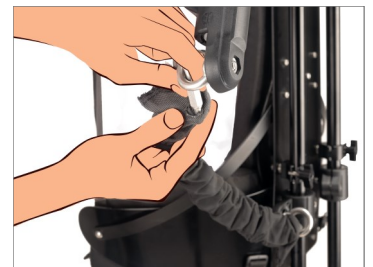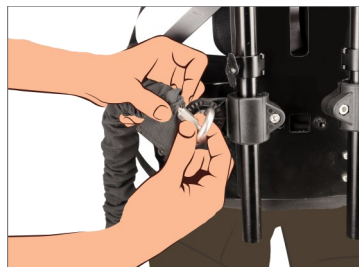


- Follow the same process to attach the second arm.


NOTE: Bungee rubber straps linked to the flexible arms and the starring should be securely fastened to the rig using the included Scaff clamps, which clamp to the unique frog clamps.

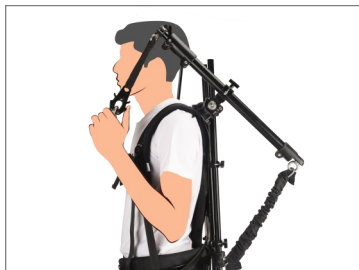

- The height of the rod holding the camera can be adjusted using the provided knob as per your shooting requirement.

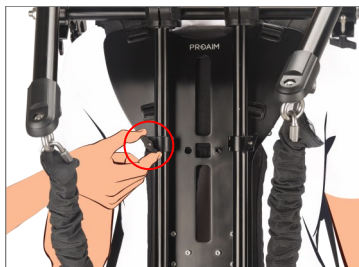


- Loosen the rod clamp to properly position the Bungee rubber strap using the 5mm Allen key.

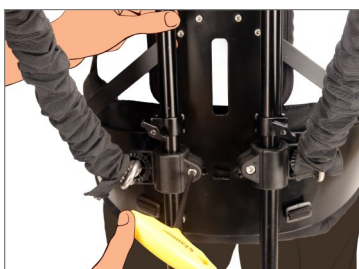



- Securely re-tighten the rod clamp with the Allen key.





- Follow the same process to position the second Bungee rubber strap.

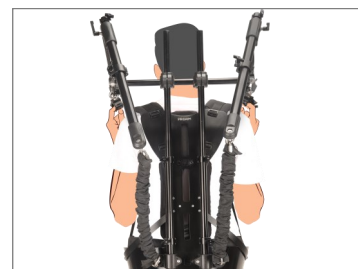


- The extension arm's position can be adjusted using the knob present on it.

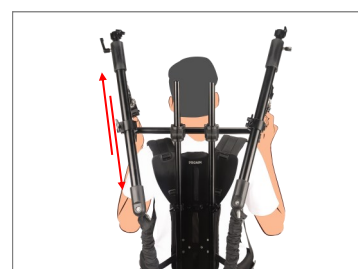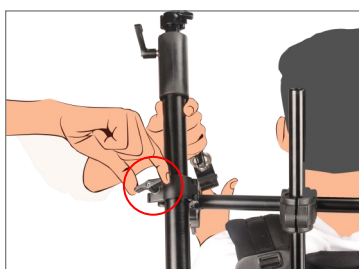


- Loosen and later re-tighten the knob after adjusting the height of the extension arm.

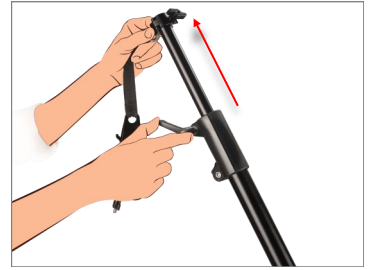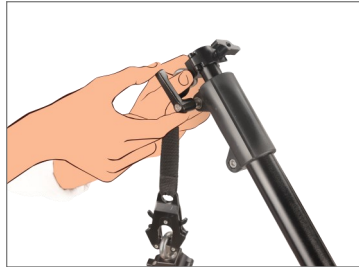



- Follow the same process for the second extension arm, as shown in the image.

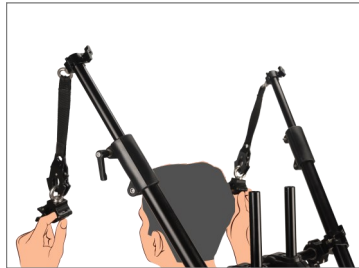



- Now, detach both arm clamps by pressing the frog clamps.

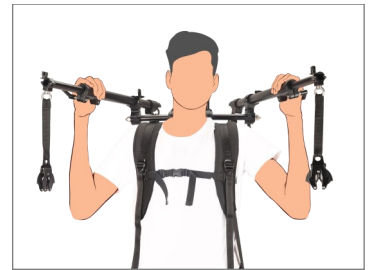

- Open the clamp by loosening it, as shown in the image.

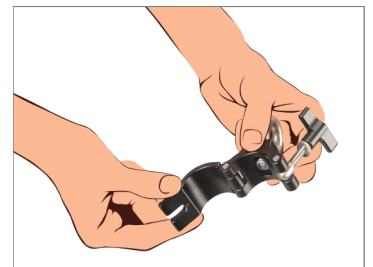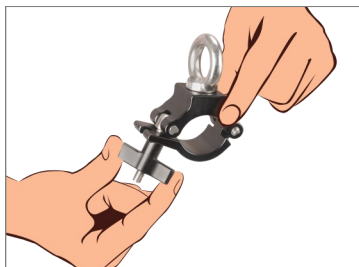

- Attach the opened clamp with the star ring (Not Included) and properly tighten it.

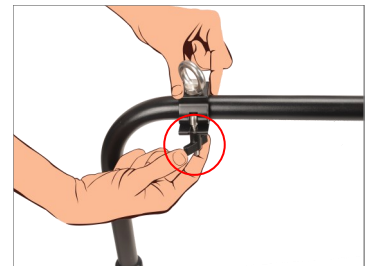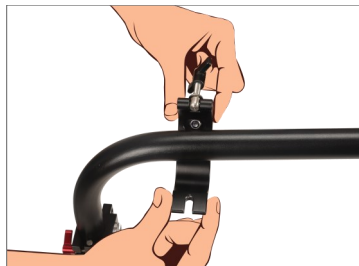



- Follow the same process for attaching the second clamp with the star ring.



- Now, attach the frog clamps of both the arms with the hook present on the star ring.




- Remove the quick-release plate (Not Included) by loosening its knob for attaching the star ring to a gimbal (Not Included).

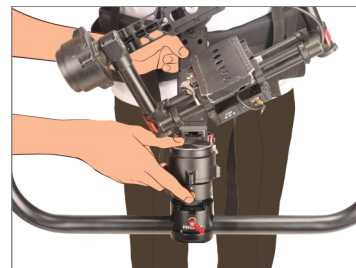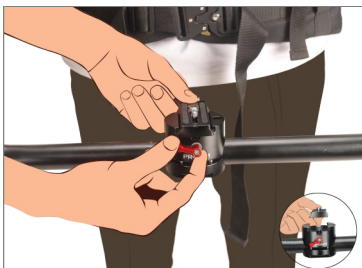

- The starring has been appropriately attached to the camera (Not Included).

NOTE: It also features seamless weight adjustment for payloads of up to 5kg /11lb15kg /33lb via easy extension and retraction of the two provided telescopic arms.

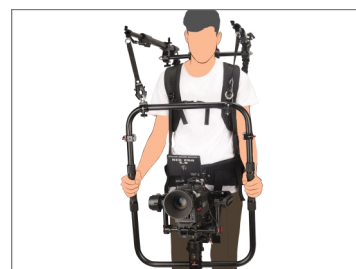

YOUR PROAIM HAWK LITE BODY SUPPORT STABILIZING VEST RIG ALL DRESSED UP AND READY TO GO!



(SHOWN WITH OPTIONAL ACCESSORIES)

Warranty: We offer one year warranty for our products from date of purchase. Within this period of time, we will repair it without charge for labor or parts. Warranty doesn't cover transportation costs nor does it cover a product subjected to misuse or accidental damage. Warranty repairs are subjected to inspection and evaluation by us.

Liability: We are not liable for damage caused by products that we do not supply or from mishandling in transit, accident, misuse, neglect, lack of care of the product, or service by anyone other than our company.

Contact Us: In case of any kind of dissatisfaction, please Contact us immediately and we promise our utmost support and care until you use our product.