

Mitchell Hitch Mount (HMA-MTCL-01)

Assembly Manual



What's In The Box

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.



Mitchell Hitch




1 x 48.3mm Rod Clamp



1 x (5mm) Allen Keys
1 x Allen Bolt (35mm)


Mitchell Hitch Setup

- Remove the bolt of the rod clamp on the Mitchell hitch with a 3/16mm Allen key.
- Detach the rod clamp from the Mitchell hitch. And attach with a trailer hitch **(Not-Included)**.
- Insert the bolt by matching the bolt holes of Mitchell Hitch with Trailer Hitch **(Not-Included)** and properly secure it with the help of a 3/16mm Allen key.

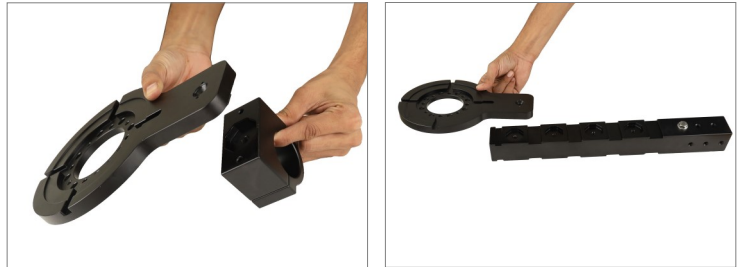

Fluid Head

- Place the fluid head **(Not-Included)** on top of the Mitchell hitch.
- After properly placing the fluid head **(Not-Included)**, tighten the bottom part of the Mitchell hitch properly with the help of a castle ring, attach the camera **(Not-Included)** with the top plate of the fluid head and properly secure it by sliding the top plate of the fluid head.

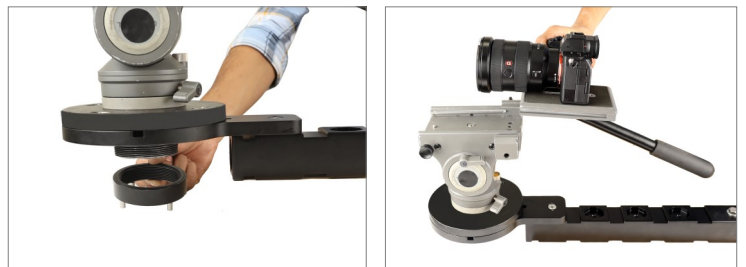

**YOUR PROAIM MITCHELL HITCH MOUNT
ALL DRESSED UP AND READY TO GO!**



(SHOWN WITH OPTIONAL ACCESSORIES)

Warranty: We offer one year warranty for our products from date of purchase. Within this period of time, we will repair it without charge for labor or parts. Warranty doesn't cover transportation costs nor does it cover a product subjected to misuse or accidental damage. Warranty repairs are subjected to inspection and evaluation by us.

Liability: We are not liable for damage caused by products that we do not supply or from mishandling in transit, accident, misuse, neglect, lack of care of the product, or service by anyone other than our company.

Contact Us: In case of any kind of dissatisfaction, please Contact us immediately and we promise our utmost support and care until you use our product.