

Assembly Manual



What's In The Box

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.



Multi Rig



Mounting Clamp



Bag Packing

5/16" Allen Key



2 x Camera Bolts (3/8 x 1")

All rights reserved.

No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photo-copying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the Publisher.

Multi Rig Pan-Tilt Camera Head Setup

- Loosen the Ratchet knob of the Multi Rig and rotate the plate.



- Re-tighten the Ratchet knob after rotating the plate.




Mounting Clamp Assembly

- Loosen the Ratchet knob of the mounting clamp and slide the mounting clamp onto the Multi Rig.



- Re-tighten the Ratchet knob after attaching the mounting clamp.

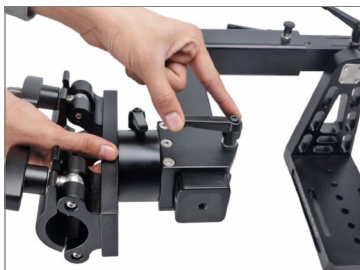

Rod Mounting

- Loosen both scaffold clamp knobs and open the clamp.





- Attach the clamp to the rod and then close the clamp.
- Mount the Multi Rig in the Underslung / Over slung position as per your requirement.



Left to Right Adjustment

- Loosen the Ratchet knob of the mounting clamp and adjust the Multi Rig.
- Adjust the position of the Multi Rig (Left/Right) as per your requirement and re-tighten its ratchet knob.

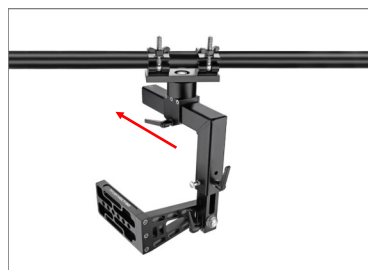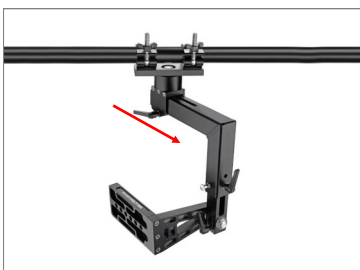



360° Rotation Function

- Loosen the Ratchet knob of the mounting clamp and rotate the Multi Rig.



- Rotate and set the Multi Rig as required.

Feature: The Multi Rig offers a full 360° rotation.

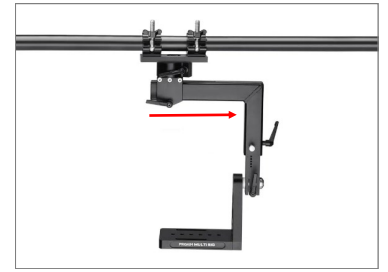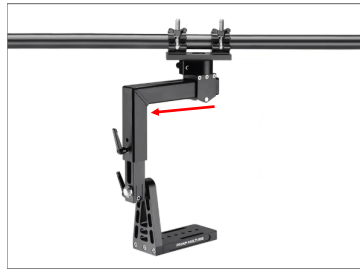

- Loosen the plate's Ratchet knob and rotate the plate as required.




Feature: The plate offers a full 360° rotation.



Height Adjustment

- Loosen the ratchet knob of the Multi Rig and pull the push-pin.

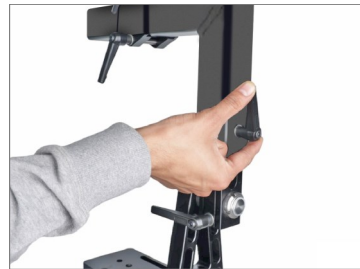

- Now, adjust the height of the plate per your requirement.



Camera Plate Mounting

- Insert a (3/8 x 1") bolt into the bottom of the plate and mount the Camera plate on it.
NOTE: The free holes on the plate allow additional customization, empowering the Multi Rig to optimize any project.



- Now, tighten the Bolt using a 5/16" Allen key.
- The Camera plate is now securely mounted.



Camera Mounting Setup

- Slide the Camera on the Camera plate and lock it.
- The Camera is now securely mounted.

NOTE: The Multi Rig adapts to any shooting scenario with its underslung and over-slung capabilities, catering to your specific needs.



**YOUR PROAIM MULTI RIG PAN-TILT CAMERA HEAD
ALL DRESSED UP AND READY TO GO!**



(SHOWN WITH OPTIONAL ACCESSORIES)

Warranty: We offer a one-year warranty for our products from the date of purchase. Within this period, we will repair it without charge for labor or parts. The warranty doesn't cover transportation costs, nor does it cover a product subjected to misuse or accidental damage. Warranty repairs are subject to inspection and evaluation by us.

Liability: We are not liable for damage caused by products we do not supply or from mishandling in transit, accident, misuse, neglect, or lack of care of the product or service by anyone other than our company.

Contact Us: If you are dissatisfied, please contact us immediately. We promise our utmost support and care until you use our product.