

Assembly Manual



What's In The Box

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.

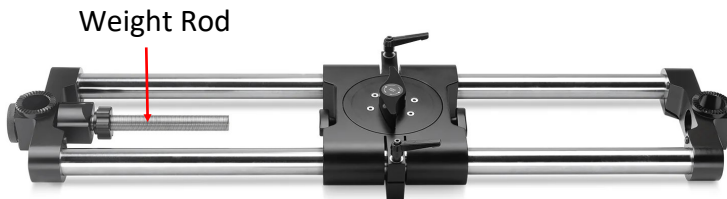

Weight Rod

Offset Slide pan Slider Rig



Mitchell Plate



1 x T-Type Allen Key
(Size: 5mm)



Flight Case

All rights reserved.

No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photo-copying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the Publisher.

INDEX

Sr. No	Particulars	Page No.
1	Offset Slide Pan Slider Rig Setup	3
2	Mitchell Plate Assembly	4
3	Fluid Head Assembly	4-5
4	Camera Mounting	5
5	Weight Rod Assembly	6
6	360° Rotation Function	6-7
7	Sliding Function	7
8	Final Setup	8

Offset Slide Pan Slider Rig Setup

- Mount the Offset Slider on the Toro Stand (Not Included) and tighten it using the locking knob.

NOTE: Stabilize the Slider in one position using our glove-friendly tripod locking knob.



- The Offset Slider Rig is successfully mounted on the Toro Stand.



- Remove the weight rod of the Slider by removing its knob.



- Now, insert the weight rod from above and insert the knob from bottom, as shown in the image.



- After inserting the Locking Knob, tighten it.



Mitchell Plate Assembly

- Remove the knob of the Mitchell Plate.



- Attach the Mitchell Plate and tighten its knob, as shown in the image.



- Now, tighten all the bolts of the Mitchell Plate using the 5mm Allen key.



Fluid Head Assembly

- Remove the castle ring of the Fluid Head **(Not Included)**.



- Mount the Fluid Head on the Mitchell Plate, as shown in the image.



- After mounting the Fluid Head, attach the castle ring and properly mount it.



- Press the push pin of the Fluid Head and remove the Camera Plate.



■ Camera Mounting

- Attach the Camera Plate to the Camera **(Not Included)** and tighten its bolts using a screwdriver **(Not Included)**.



- Slide the Camera onto the Fluid Head and lock it using the locking pin.



- Your Camera has been successfully mounted on the Fluid Head.



Weight Rod Assembly

- Remove the weight closer from the weight rod and insert the weight **(Not Included)**.



- After inserting the weight, re-insert the weight and properly tighten it.



NOTE: The Camera can be set horizontally and vertically on either side of the rig for boundless creativity and adaptability.




360° Rotation Function


- Loosen the side knobs of the Slider.



- After loosening the side knobs, adjust the rotation of the Slider per your requirement.

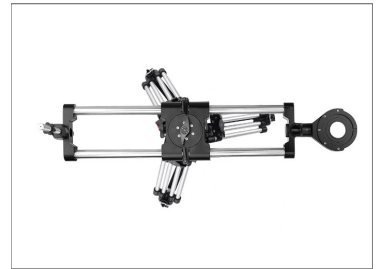

- After positioning the Slider, re-tighten both the side knobs, as shown in the image.


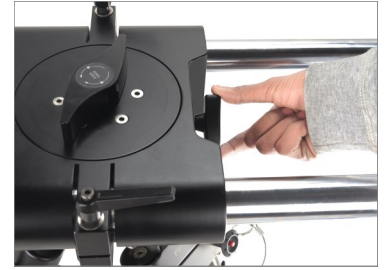


Sliding Function

- Loosen the both the locking levers.



- Slide the Slider to the left or right per your requirement.

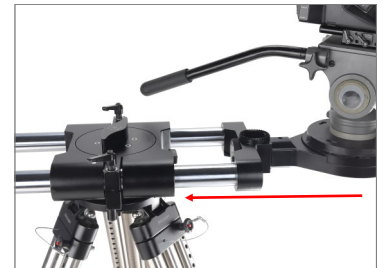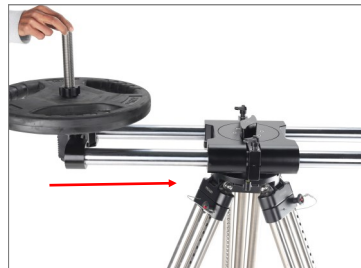

- After setting the position of the Slider, re-tighten the locking levers.



**YOUR PROAIM OFFSET SLIDE-PAN VIDEO FILM CAMERA SLIDER RIG
ALL DRESSED UP AND READY TO GO!**



(SHOWN WITH OPTIONAL ACCESSORIES)

Warranty: We offer one year warranty for our products from date of purchase. Within this period of time, we will repair it without charge for labor or parts. Warranty doesn't cover transportation costs nor does it cover a product subjected to misuse or accidental damage. Warranty repairs are subjected to inspection and evaluation by us.

Liability: We are not liable for damage caused by products that we do not supply or from mishandling in transit, accident, misuse, neglect, lack of care of the product, or service by anyone other than our company.

Contact Us: In case of any kind of dissatisfaction, please Contact us immediately and we promise our utmost support and care until you use our product.