

PR◊AIM Power Suction Mount Camera Gripper (P-G-PM)

Assembly Manual



What's In The Box

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.



All rights reserved.

No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photo-copying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the Publisher.

Camera Mount Gripper Setup

- Remove the cap from the Suction Cup, and you will see 1/4" thread located in the center, as shown in the image.



- Remove the dust cover and position the suction cup wherever required.



- Press down the suction cup and keep pushing the pump to firmly fix it on the surface. Repeat this process for all the suction cups.

Caution: Recheck the Pump every 90 minutes. If the red line is visible, Re-pump the cup without losing the remaining vacuum till the Red Line disappears.



- Screw in the Ball Tilt Head on suction cups. Adjustable Ball Tilt Heads allow for an extensive range of lockable positions for Aluminum Rods.



- Similarly, mount all the Ball Tilt heads onto the suction cups.



3 x Different Aluminum Rods Assembly

- Pull and then remove the cap of the aluminum rod (30cm).



- Screw the other end of the aluminum rod (30cm) onto the Ball Tilt head, and then tighten it.



- Remove the cap of the aluminum rod (15cm), then screw and tighten it properly onto the Ball Tilt head. Repeat the same process for attaching the other aluminum rods.




NOTE: Three rods are provided for each length (30cm,15cm,7.5cm). These rods can be linked together in any combination you need to create the perfect setup.



- First loosen the knob, then set the position of the Aluminum rods and finally secure them by tightening the knobs.



- Screw the rods into the camera mounting platform and tighten them.

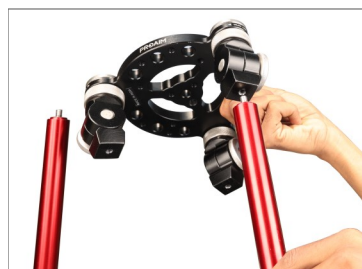

- Firstly, remove the dust cover and place your suction cup on the selected place and press down to fix the pump firmly on the surface.



- Attach one end of Rope with metal Hooks to camera mounting platform and another end to Metal loop of Suction cup. Tighten the Rope properly.



- Adjust the rope with the help of the push-pin button of the hook, as shown in the image.



- Attach Rope Hooks to your vehicle, then attach metal hooks to Rope Hooks and tighten rope properly to secure your gripper.



- Rope hooks have been properly attached to the suction cups with metal hooks.




- Mount the camera (Not Included) onto the top mounting part of the setup, and then properly tighten the knob at the bottom.



■ Bowl Adapter Setup

- Mount the Bowl Adapter onto the camera platform, and then insert the bolt by aligning the threads, as shown in the image.

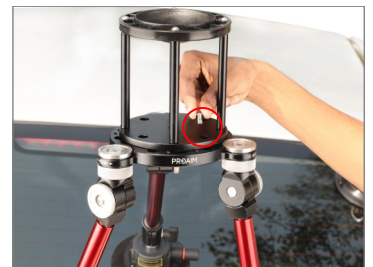

- Secure all the bolts using the Allen key.



- Remove the knob of the Bowl Fluid Head (Not Included) and mount it on the Bowl Adapter .



- Then, properly tighten and secure the knob of the Fluid Head (Not Included) from the bottom.



- Loosen the fluid head (Not Included) knob and then remove the plate.



- Attach the camera plate to the bottom of the camera (Not Included), then secure it with the help of a screwdriver, as shown in the image.



- Pull the knob of the fluid head (Not Included), then slide and mount the camera (Not Included), as shown in the image.



Features of Camera Mounting Platform

Swivel Adjustments

The Camera mounting platform of Power Mount Gripper has three leg attachment points that are each fitted with two positive locking ratchet joints, one for tilt and one for swivel. Each locking ratchet joint has a quick turn knurled lock ring for easy adjustment. You can unlock and lock each joint with a slight twist.



Tilt Adjustments

To adjust tilt or swivel of each leg, first make sure lock ring on the appropriate joint is in the UNLOCK position, then adjust position of the leg as per need. And then turn lock ring back in the LOCK direction so that the camera won't shake from joint movement while the vehicle is in motion.



**YOUR PROAIM POWER SUCTION MOUNT CAMERA GRIPPER
ALL DRESSED UP AND READY TO GO!**



(SHOWN WITH OPTIONAL ACCESSORIES)

Warranty: We offer one year warranty for our products from date of purchase. Within this period of time, we will repair it without charge for labor or parts. Warranty doesn't cover transportation costs nor does it cover a product subjected to misuse or accidental damage. Warranty repairs are subjected to inspection and evaluation by us.

Liability: We are not liable for damage caused by products that we do not supply or from mishandling in transit, accident, misuse, neglect, lack of care of the product, or service by anyone other than our company.

Contact Us: In case of any kind of dissatisfaction, please Contact us immediately and we promise our utmost support and care until you use our product.