

Universal Camera Gimbal Tripod Head (P-GH-30)

Assembly Manual



What's In The Box

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.



Proaim Universal Camera
Gimbal Tripod Head



2 x Mounting Screws
Sizes: 1/4"-20 & 3/8"-16

All rights reserved.

No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photo-copying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the Publisher.

Gimbal Tripod Head Setup

- Mount and secure the gimbal head on the tripod.

NOTE: The gimbal head mounts directly to tripods with a 3/8"-16 threaded mount. In addition to that, we provide you with the conversion adapter for 1/4"-20 mounting, making it universally compatible with the tripods.

- After mounting the gimbal head, secure it correctly with the locking knob.




NOTE: The head pans 360° while keeping the horizon straight using the bubble level at the base of the head. Head has a 360° panoramic scale that allows easy pan adjustments.

- Loosen the locking knob of the gimbal head, then set the swing arm according to the shot's requirement and tighten the knob back.

NOTE: The swing arm tilt horizontally and gives you extreme tilt angles to achieve a multi-dimensional shot as shown in the image.

- Slide the camera plate clamp up and down by loosening the locking knob as shown in the image. Set the camera position according to your requirement and tighten the knob back.

NOTE: It has an Arca Swiss compatible camera plate clamp that moves up and down on a scaled slide way, secured with a control knob.

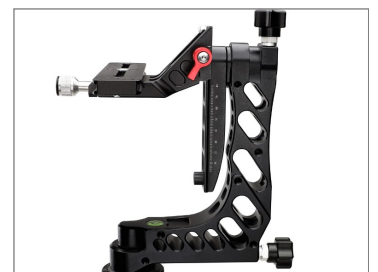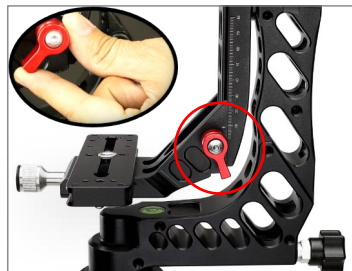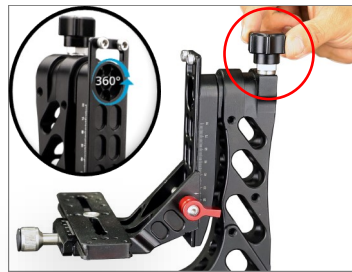

- By loosening the adjustment knob, the dovetail plate can move backward/forward shown in the image.



NOTE: The Gimbal Head has a double dovetail plate with 1/4"-20 and 3/8"-16 mounting screws fastened by the platform adjustment knob.



NOTE: Before use, ensure that the head is vertically and horizontally balanced the camera (**Not Included**) must be able to be adjusted at any angle while remaining in position.



- The adjustment knob allows you to set the position of the camera (**Not Included**) as needed.

NOTE: It easily supports and balances huge and heavy telephoto lenses weighing up to 22.7kg.



YOUR PROAIM UNIVERSAL CAMERA GIMBAL TRIPOD HEAD ALL DRESSED UP AND READY TO GO!



(SHOWN WITH OPTIONAL ACCESSORIES)

Warranty: We offer one year warranty for our products from date of purchase. Within this period of time, we will repair it without charge for labor or parts. Warranty doesn't cover transportation costs nor does it cover a product subjected to misuse or accidental damage. Warranty repairs are subjected to inspection and evaluation by us.

Liability: We are not liable for damage caused by products that we do not supply or from mishandling in transit, accident, misuse, neglect, lack of care of the product, or service by anyone other than our company.

Contact Us: In case of any kind of dissatisfaction, please Contact us immediately and we promise our utmost support and care until you use our product.