

Assembly Manual



■ What's In The Box

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.



Fly-Master Jib for Zhiyun Crane-2



Top Cable Wire



Weight Rod



Cable Guide Rod

All rights reserved.

No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photo-copying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the Publisher.

INDEX

Sr. No	Particulars	Page No.
1.	Fly Master Jib Setup	3-4
2.	Gimbal Setup	4-5
3.	Inserting weight rod in Fly master jib	5
4.	Attaching Top cable wire	6
5.	Maximum Extendable Length of Fly Master Jib	7
6.	LCD Monitor Setup	7-8
7.	Final Setup	8

Fly Master Jib Setup

- Loosen the bottom clamp of the fluid head (**Not Included**) and mount it on the stand.




- Then properly tighten the bottom clamp on the 100mm bowl stand (**Not Included**), as shown in the image.


NOTE: It comes with a tripod mount with 1/4" -20 and 3/8"-16 threads on the bottom to mount it on the fluid head.



- Now remove the fluid head plate by pressing the lock lever.

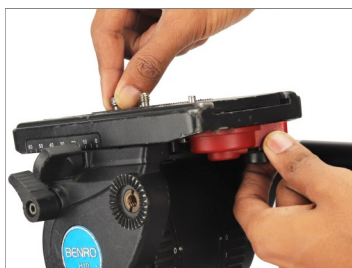

- Attach the plate to the Fly-master Jib and securely tighten it, matching the threads, with the help of a screwdriver.

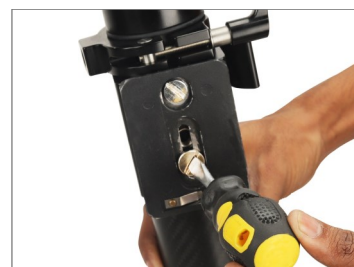

- Now mount the Fly-master Jib on top of the fluid head and properly tighten it with the locking lever.




NOTE: It extended when not in use at congested shoot sites. Just slide in or out when required.



- Loosen the knob and increase the height of the jib as shown in the image.



NOTE: You can increase the length of jib as per requirement.

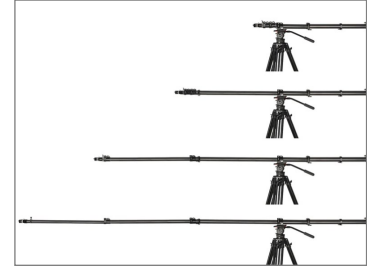

Gimbal Setup

- Loosen the ratchet knob and open the clamp.



- Then remove the Gimbal mounting adapter, as shown in the image.



- Attach the Gimbal mounting adapter to the Gimbal (**Not Included**) and properly tighten it using a screwdriver.


NOTE: Any other gimbal with a handle, featuring a 1/4"-20 or 3/8"-16 threaded hole at its bottom, can be attached.



- Attach the Gimbal (**Not Included**) to the clamp and properly tighten it via the knob.




NOTE: It's compatible with Zhiyun Crane-2 & other hand-held gimbals with 1/4" or 3/8" Mounting threads.

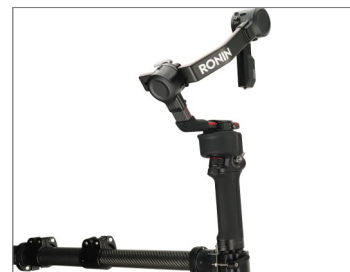

Inserting weight rod in Fly master jib

- Loosen the knob and insert the weight rod.

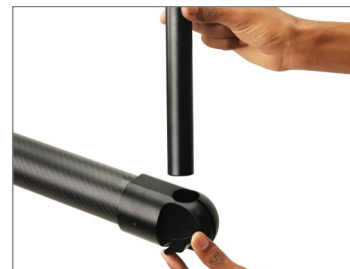

- Properly tighten the knob.

NOTE: Provided highly robust weight rod supports universal weight plates with a 25mm hole diameter.



- Insert weight **(Not Included)** according to your requirement.



- Loosen the clamp's knob and rotate the clamp.




- Then securely tighten the knob.

NOTE: High-grade Aluminum constructed clamps at each section's end promise a strong clamping force.



Attaching Top cable wire


- Securely attach the first end of the top cable wire to the clamp.

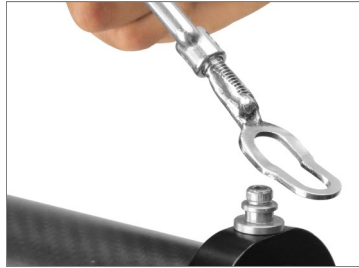

- Similarly, insert the second end of the wire into the clamp, as shown in the image.



NOTE: It facilitates convenient underslung & over-slung operations for various shot requirements.

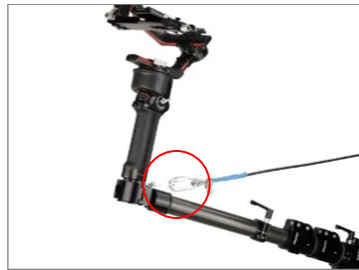

- Now loosen the clamp's knob and rotate the clamp.



- Now, securely tighten the knob and insert the cable guide rod.




- Then insert the top cable wire into the rod, as shown in the image.

NOTE: Set the Cable Guide Rod's position according to your requirement.



Maximum Extendable Length of Fly Master Jib

Note: Fully extended length=13ft. & Length of 1st 3 each section =3ft. & length of last section=4ft.

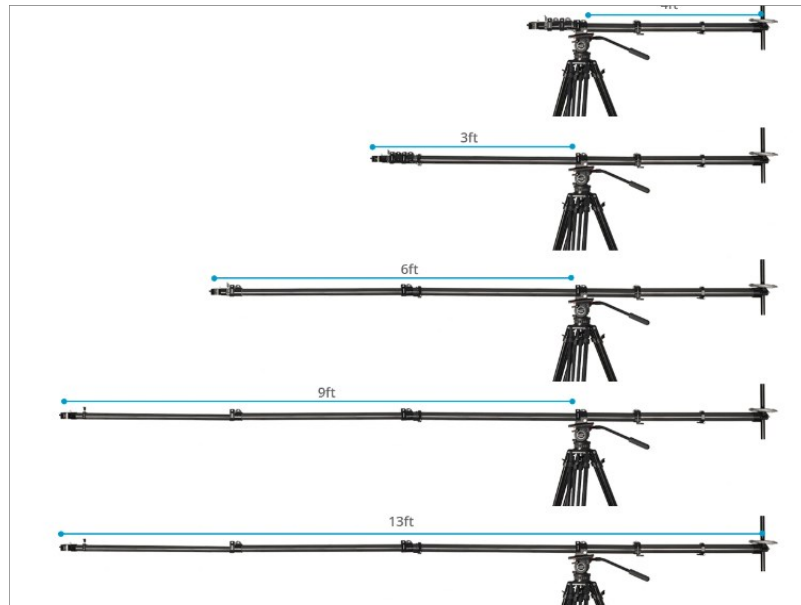

LCD Monitor Setup

- Loosen the ratchet knob of the clamp and remove the clamp.



- Remove the clamp's bolt using a screwdriver (not included).



- Insert Magic arm (Not Included) into the clamp and tighten it.

NOTE: The arm features a combination of universal mounting pins with 1/4" threads on either end, offering you great mounting flexibility.



- Position the clamp onto the Fly Master Jib and tighten the ratchet knob of the clamp.



- Now, mount your LCD (Not Included) onto the clamp.



- The LCD is now securely mounted to the Jib.



**YOUR PROAIM FLY-MASTER TELESCOPIC CARBON FIBER JIB CRANE
ALL DRESSED UP AND READY TO GO!**



(SHOWN WITH OPTIONAL ACCESSORIES)

Warranty: We offer one year warranty on our products from date of purchase. Within this period of time, we will repair it without charge for labor or parts. Warranty doesn't cover transportation costs nor does it cover a product subjected to misuse or accidental damage. Warranty repairs are subjected to inspection and evaluation by us.

Liability: We are not liable for damage caused by products that we do not supply or from mishandling in transit, accident, misuse, neglect, lack of care of the product, or service by anyone other than our company.

Contact Us: In case of any kind of dissatisfaction, please Contact us immediately and we promise our utmost support and care until you use our product.