

# PROAIM Horizon Suction Camera Mount for Car (G-HRZN-01)

---

## Assembly Manual



### ■ What's In The Box

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.



Proaim Horizon Car Mount



2 x Ratchet Belts



3 x Dust Covers

---

All rights reserved.

No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photo-copying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the Publisher.

## ■ Horizon Suction Camera Mount Setup

**NOTE:** To guarantee proper adhesion of suction cups, check that the surfaces of both suction cup and mounting surface are clean, dry & dust-free. Please mount the device on smooth, even, non-porous and metal surfaces.

- Mount the Robust suction cup gripper on a flat surface, as shown in the image.



- Press the lever of the Robust Suction Cup Gripper and lock it properly.



- Secure the movement of the ball joint with the help of the Ratchet knob of the Telescopic legs.

**NOTE:** Three Ratchet knobs are provided in Horizon car mount. With the help of the bottom knob, you can change the ball joint movement of the telescopic legs.



- Loosen the center Ratchet knob of the telescopic legs.



- Adjust the height of the telescopic legs according to your requirement and Tighten the Ratchet knob properly as shown in the image.




- Properly mount the Ball head (not included) at the top platform of the Horizon car mount, which has a 3/8"-16 camera screw, and secure it.

**NOTE:** You can set up the system in just a few minutes. The top of the Horizon car mount has a 3/8"-16 screw to mount your camera.




- Hook the Ratchet belt with the horizon suction mount.

**NOTE:** Although the horizon car mount holding force is sufficient for regular driving shots, safety belts must be used for additional protection.

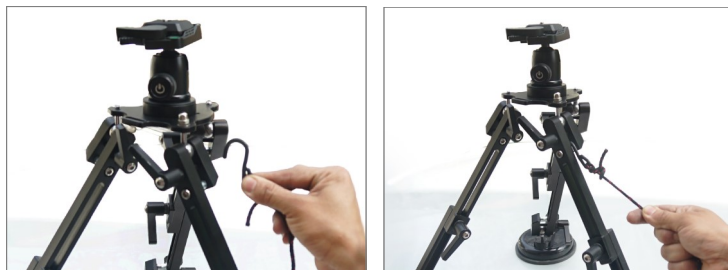

- You can loosen or tighten the Ratchet belt accordingly, as shown in the picture.

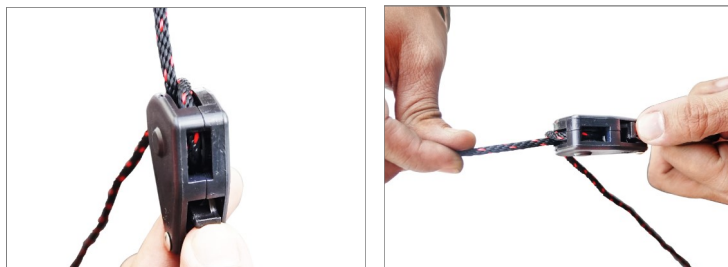

- Hook the second side of the ratchet belt to the car so that the setup is properly secured with double security.

**NOTE:** We always recommend using ratchet belts while using the equipment for double safety.



- Unlock the lever of the ball head  
(Not-Included)



- Remove the camera mounting plate and mount the camera (Not-Included) on the Ball Head.



- Your setup is ready to use.

**NOTE:** Test all fixtures before driving .

**NOTE:** Horizon car mount it anywhere, whether it's on the roof, hood, trunk, or side of a moving vehicle. The sturdy device safely holds 40kg/88lb for steady shots and 15kg/33lb for running shots.



## YOUR PROAIM HORIZON SUCTION CAMERA MOUNT FOR CAR ALL DRESSED UP AND READY TO GO!



(SHOWN WITH OPTIONAL ACCESSORIES)

**Warranty:** We offer one year warranty for our products from date of purchase. Within this period of time, we will repair it without charge for labor or parts. Warranty doesn't cover transportation costs nor does it cover a product subjected to misuse or accidental damage. Warranty repairs are subjected to inspection and evaluation by us.

**Liability:** We are not liable for damage caused by products that we do not supply or from mishandling in transit, accident, misuse, neglect, lack of care of the product, or service by anyone other than our company.

**Contact Us:** In case of any kind of dissatisfaction, please Contact us immediately and we promise our utmost support and care until you use our product.