

## CE-PH60-3PH



- Designed and widely applied for public pools
- Heating & Cooling functions
- Corrosion proof titanium heat exchanger - long life span
- Multiple system protections Safe and reliable operation
- Reverse cycle defrosting
- Scroll world brand compressor
- Intelligent control
- Self-Diagnosis: Displays error code on control panel
- 3 Year Warranty \*

\*see warranty terms and conditions



## SPECIFICATIONS:

MODEL	CE-PH60-3PH	
Ambient 24°C Water 26°C in, 28°C out	Capacity (kW)	60.70
	Power Input (kW)	11.10
	COP	5.47
Ambient 15°C Water 26°C in, 28°C out	Capacity (kW)	51.54
	Power Input (kW)	10.64
	COP	4.84
Ambient 35°C Water 29°C in, 27°C out	Capacity (kW)	37.54
	Power Input (kW)	13.04
	EER	2.88
Working Ambient Temperature	°C	-10~43
Power Supply		380-415V/3N/50Hz
Max Power Input	kW	16.22
Max Current	A	24.66
Compressor Type		Scroll
Fan Direction		Vertical
Water Flow Volume	m3/h	25.05
Refrigerant Type		R410A
Min Pressure/Max Pressure		1.5/4.15Mpa
Material of Casing		Galvanized Steel
Unit Net Dimensions (L*W*H)	mm	1520*738*1132
Net Weight	kg	340
Gross Weight	kg	370
Sound Pressure 1m	dB(A)	61
Water Proof Level		IPX4

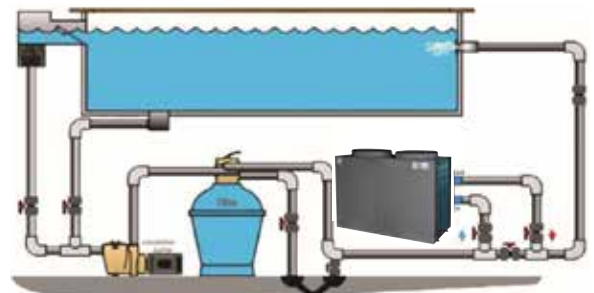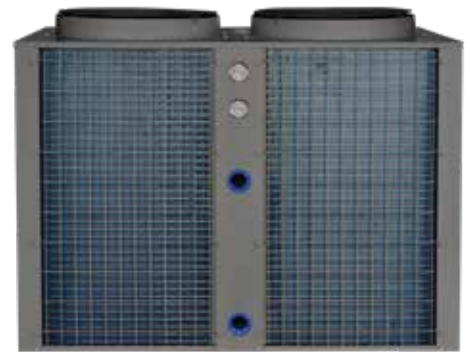

Specifications subject to change without warning.

