

# APPEARANCE®

## Floor Finish

### PRODUCT DESCRIPTION:

Appearance® is a new generation floor finish that achieves maximum performance when maintained by spray buffing and/or high speed buffing. This versatile product provides outstanding response to a variety of equipment/speed/pad combinations to produce excellent results.

### FEATURES:

#### Unique Formulation:

Combination of polymers and synthetic waxes.

#### Easy to Maintain:

Superior resistance to scuffing, scratching, and marking. Spray buffing will clean, repair and improve the beauty of the floor.

#### Produces "Wet Look":

Used in conjunction with a high speed buffer or burnisher produces gloss, "wet look" floor. Does not powder. Long wearing.

#### UL Approved for Slip Resistance:

Resistance: Provides a safe, slip resistant surface.

### PRODUCT SPECIFICATIONS:

pH .....	8.6 ± 0.4
Appearance .....	Off White Emulsion
Fragrance .....	Acrylic
Freezing Point.....	About 32°F
% Non-Volatile Solids .....	18.5
% Total Solids .....	23.5
Boiling Point .....	212°F
Solubility in Water .....	Dispersible
Flash Point.....	None
Coverage .....	1800 to 2200 sq. ft. per gallon
(may vary due to differences in porosity of the surface)	


### INGREDIENTS:

Water .....	7732-18-5
Styrene acrylate polymer .....	25085-34-1
Diethylene glycol monoethyl ether .....	111-90-0
Ethylene copolymer .....	67892-91-5
Tri-butoxyethyl phosphate .....	78-51-3
Styrene acrylic copolymer.....	Mixture

### PRODUCT AVAILABILITY:

- 9631 .....4/1 gal.
- 9635 .....1/5 gal. pail
- 96355 .....1/55 gal. drum


### END-USE-RATING



0	1	2	3	4
Minimal	Slight	Moderate	Serious	Severe
Minimo	Minimo	Moderar	Grave	Drastico

# APPEARANCE® Floor Finish

**USE INFORMATION:** Appearance® Floor Finish is recommended for use in spray buffing or high speed buffing maintenance programs, on all resilient flooring, tile, terrazzo and clay tile. Not recommended for use on wood floors.

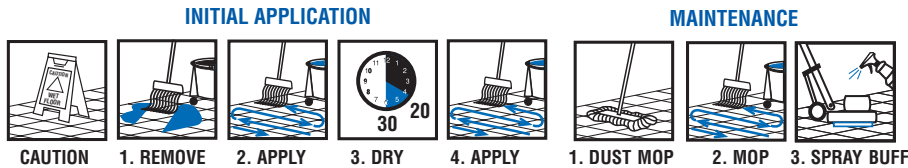

## DIRECTIONS FOR USE:

### INITIAL APPLICATION

1. **REMOVE** old sealer/finish using a Fullpro stripper and following label directions.
2. **APPLY** a thin coat of **Appearance®** using a clean finish mop.
3. **DRY:** Allow 20-30 minutes drying time.
4. **APPLY** 4 coats for best results allowing for adequate drying time between each coat.

### MAINTENANCE

1. **Dust mop**, damp mop or sweep regularly. Use a neutral cleaner, such as Concur™.
2. **For best results**, allow **APPEARANCE®** to cure for 24 hours before buffing.
3. **Spray buff** as needed using high speed machine and appropriate pad.

**Note:** Clean and recoat areas as the foundation becomes thin or as buffing response decreases.

## WARNING

May cause skin irritation. Direct contact with eyes may cause temporary irritation.

## Prevention

Observe good industrial hygiene practices.

## Response

Wash hands after handling.

## Storage

Store away from incompatible materials.

## Disposal

Dispose of waste and residues in accordance with local authority requirements..

**KEEP OUT OF REACH OF CHILDREN**

## PERSONAL PROTECTION:

**Respiratory Protection:** Not needed under normal conditions.

**Ventilation:** Use with adequate ventilation.

**Eye Protection:** Safety glasses are recommended.

**Protective Gloves:** Protective gloves are optional.

**Other Protective Clothing or Equipment:** Wear clothing as necessary to prevent skin contact.

## TRANSPORTATION INFORMATION:

**U.S. DOT - Proper Shipping Name:** Not regulated by DOT.

**Marine Pollutant:** No



Floor Coating and Finishing Material AS TO SLIP RESISTANCE ONLY 8P88

Los materiales para recubrimiento acabado del piso están SÓLO COMO RESISTENTES A LOS RESBALONES 8P88

## Fuller Commercial Products

One Fuller Way  
Great Bend, KS 67530  
United States  
CHEMTREC (800) 424-9300  
Emergency (620) 792-1711  
24 hour Emergency (800) 424-9300  
[www.fullercommercial.com](http://www.fullercommercial.com)

963TDS-0515

DATA SHEET

FULLPRO  
FULLER PROFESSIONAL